



HVE-50

HVE-50

Easy operation. More safety and more user-friendly features !
(Air Cooling FAN is provided as option)

HICLAVE

HVA-85/110

With Built-in Cooling Fan !




HVA-85




HVA-110



ISO 13485 CERTIFIED
Products shown in this brochure
are manufactured by the company,
ISO 13485 certified.

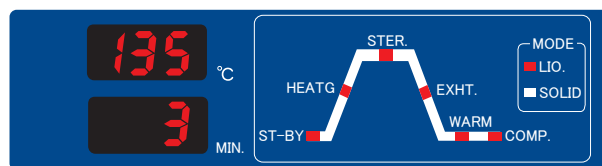

Display : HVE-50

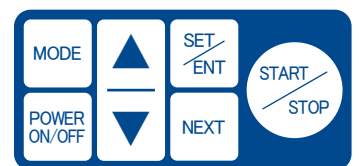

STERILIZING
SIMPLY AND WELL

HIRAYAMA

User-Friendly Features and Improved Basic Performance

1. Electromechanical lock system.
2. Dual-sensing interlock mechanism.
3. Pulse exhaust system (HVE-50).
4. Memory function (program your own).
5. Space - saving design.
6. Process status display.
7. Forced cooling fan as standard equipment (HVA-85/110) and provided as option (HVE-50).

Main specifications

Model	HVE-50	HVA-85	HVA-110
Outer dimensions (mm)	547W×532D×1046H	667W×652D×1011H	667W×652D×1191H
Chamber size (Volume)	300 φ ×710H (54.2 liter)	420 φ ×615H (98.8 liter)	420 φ ×795H (123.7 liter)
Effective capacity	50 liter	85 liter	110 liter
Power source	AC110V / 120V / 220V / 230V / 240V, 50 / 60Hz, (specify voltage when ordering)	AC220V / 230V / 240V, 50 / 60Hz, (specify voltage when ordering)	
Power consumption	2.0kW	3.0kW	4.0kW
Net weight (Approx.)	57kg	78kg	85kg
Chamber material	Stainless Steel (SUS304)		
Sterilization temperature range	105°C to 135°C		
Maximum allowable pressure (Gauge pressure)	0.255MPa		
Temperature display range	5°C to 137°C		
Warming temperature range	45°C to 80°C		
Sterilization timer	1 to 250 minutes		
Pressure gauge	0 to 0.4MPa		
Selective mode (cycle)	<ul style="list-style-type: none"> ■Agar sterilization (with Warming) : Preparation ⇒ Heating ⇒ Sterilization ⇒ Exhaust (P0,P1,or P2) ⇒ Warming ⇒ Completion ■Liquid sterilization : Preparation ⇒ Heating ⇒ Sterilization ⇒ Exhaust (P0,P1,or P2) ⇒ Completion ■Sterilization of solids / medical instruments : Preparation ⇒ Heating ⇒ Sterilization ⇒ Exhaust (Forced) ⇒ Completion 	<ul style="list-style-type: none"> ■Agar sterilization (with Warming) : Preparation ⇒ Heating ⇒ Sterilization ⇒ Cooling(P0,P1,or P2) ⇒ Warming ⇒ Completion ■Liquid sterilization : Preparation ⇒ Heating ⇒ Sterilization ⇒ Cooling(P0,P1,or P2) ⇒ Completion ■Sterilization of solids / medical instruments : Preparation ⇒ Heating ⇒ Sterilization ⇒ Cooling(Forced) ⇒ Completion 	
Safety devices / Warning alarm	<ul style="list-style-type: none"> * Double sensing interlock mechanism * Heater malfunction checker * Excess cooling check function * Power failure check function Electric leakage breaker and over current detector, Pressure safety valve (Note : The * marked functions show ERROR indication on the display when it works) 		
Supplied accessories	Stainless steel wire baskets, Heater cover, Drain hose, Exhaust hose, Drain bottle, Caster stoppers		
Optional accessories	Stainless steel wire baskets, Perforated stainless steel buckets.		
Air cooling fan	Option	built-in	

Specifications and appearance are subject to change without notice due to continuous product improvement.



ISO 13485 CERTIFIED
Manufactured under
ISO 13485

Manufacturer :
HIRAYAMA Manufacturing Corp.

Overseas Sales Dept.
1-8-12, MINATO, CHUO-KU,
TOKYO 104-0043, JAPAN
TEL:+81-3-6280-3724 FAX:+81-3-6260-3725
<http://www.hirayama-hmc.co.jp/>

Distributor :