


VIDEOSCOPIES

REAR FIBER
ILLUMINATION

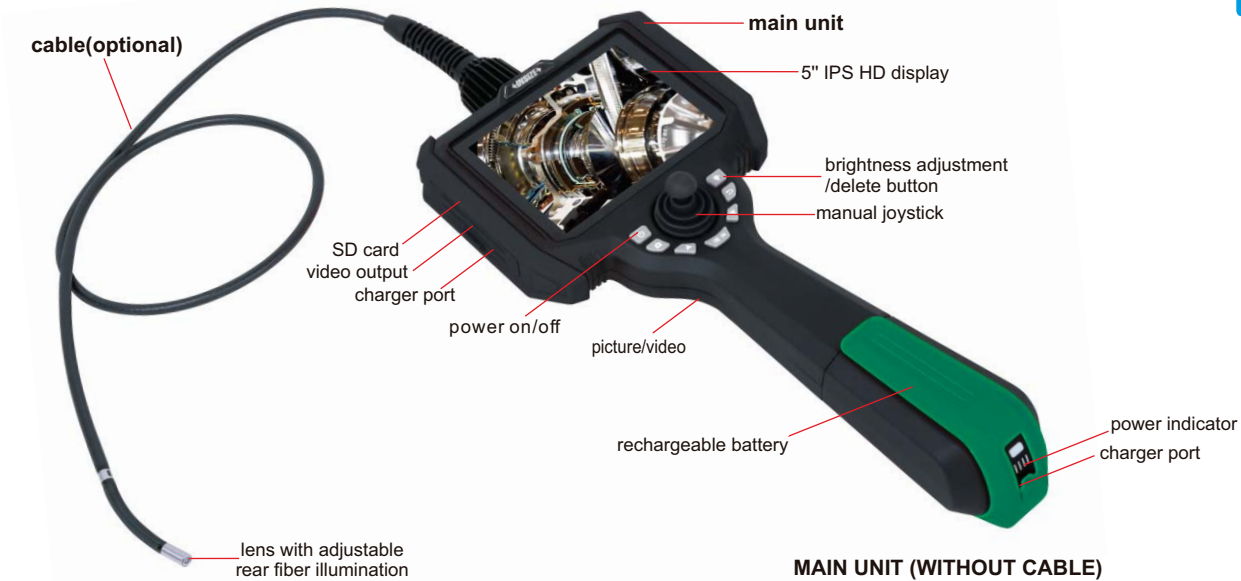

MAIN UNIT (WITHOUT CABLE)

Code	ISV-L
Display	5" high definition LCD
Resolution	1024×720
Function	take pictures, take videos
File format	picture: JPG, video: MP4
Image process	image zoom (1X, 2X, 3X, 4X)
Image control	freeze, flip over, playback and analog ruler
Memory	memory card
Output	USB, HDMI
Power supply	rechargeable lithium battery (working time ≥ 4hours) AC/DC adapter (for continuous working)
Weight	1000g



tripod(included)



changeable cable

STANDARD DELIEVERY


Main unit	1pc
32G SD card	1pc
Card reader	1pc
USB cable	1pc
Tripod	1pc
AC/DC adapter	1pc

OPERATING ENVIRONMENT

Main unit	-10~50°C, no preheat
Operating temperature	-20~70°C
Storage temperature	-20~60°C
Relative humidity	maximum 90%, no condensation


OPTIONAL ACCESSORY

Cable	Please refer to next pages for details
WIFI output	ISV-L-WIFI(must be installed in factory, only for android OS)
Temperature alarm	ISV-L-HTALARM(must be installed in factory, for Ø3.9mm, Ø4.5mm and Ø6.0mm)
Clamp	ISV-L-CLAMP1, ISV-L-CLAMP2, ISV-L-CLAMP3, ISV-L-CLAMP4 (must be installed in factory, for Ø3.9mm, Ø4.5mm and Ø6.0mm)

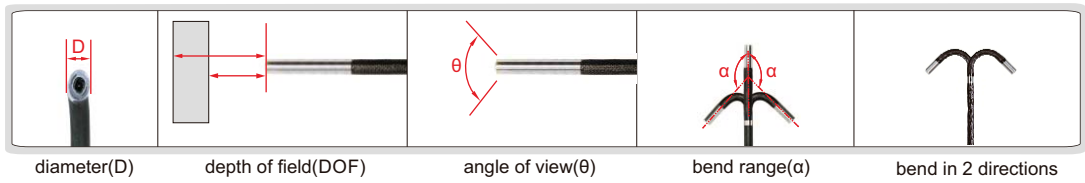


TWO-DIRECTION CABLE, FRONT VIEW

Code	Cable		Lens									
	length	type	view direction	bend direction	diameter (D)	depth of field(DOF)	bend range(α)	angle of view(θ)	illumination	pixel	resolution	dust/ waterproof
ISV-L1810	1m	tungsten wire weaved cable	front view	two directions	1.8mm	3~30mm	±160°	>120°	rear fiber	0.16M	400×400	IP65
ISV-L2010	1m	tungsten wire weaved cable	front view	two directions	2.0mm	3~30mm	±160°	>120°	rear fiber	0.16M	400×400	IP65
ISV-L2410	1m	tungsten wire weaved cable	front view	two directions	2.4mm	3~70mm (optional 5~100mm)	±160°	>120°	rear fiber	0.16M	400×400	IP65
ISV-L2415	1.5m											
ISV-L2420	2m											

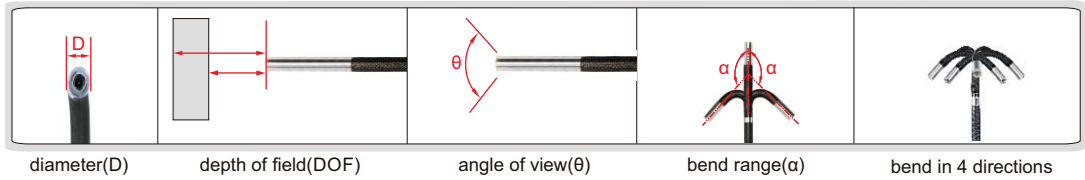


FOUR-DIRECTION CABLE, FRONT VIEW

Code	Cable		Lens									
	length	type	view direction	bend direction	diameter (D)	depth of field(DOF)	bend range(α)	angle of view(θ)	illumination	pixel	resolution	dust/ waterproof
ISV-L2810	1m	tungsten wire weaved cable	front view	four directions	2.8mm	3~70mm (optional 5~100mm)	±160°	>120°	rear fiber	0.16M	400×400	IP65
ISV-L2815	1.5m											
ISV-L2820	2m											
ISV-L2830	3m											
ISV-L3910	1m	tungsten wire weaved cable	front view	four directions	3.9mm	8~150mm (optional 3~70mm)	±160°	>120°	rear fiber	0.92M	1280×720	IP67
ISV-L3915	1.5m											
ISV-L3920	2m											
ISV-L3930	3m											
ISV-L3940	4m											
ISV-L3950	5m											
ISV-L6010	1m	tungsten wire weaved cable	front view	four directions	6.0mm	12~200mm (optional 3~70mm, 8~150mm)	±160°	>120°	rear fiber	0.92M	1280×720	IP67
ISV-L6015	1.5m											
ISV-L6020	2m											
ISV-L6030	3m											
ISV-L6040	4m											
ISV-L6050	5m											
ISV-L6060	6m											
ISV-L6070	7m											

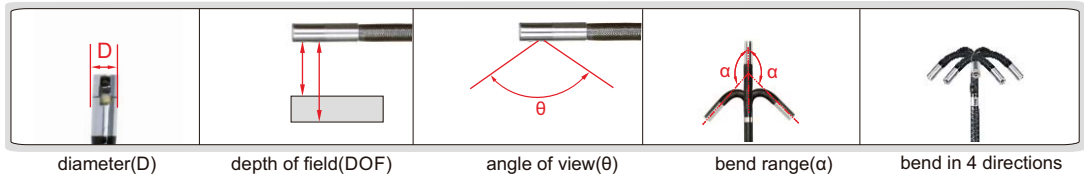

FOUR-DIRECTION CABLE, SIDE VIEW

Code	Cable		Lens									
	length	type	view direction	bend direction	diameter (D)	depth of field(DOF)	bend range(α)	angle of view(θ)	illumination	pixel	resolution	dust/ waterproof
ISV-L4510C	1m	tungsten wire weaved cable	side view	four directions	4.5mm	5~100mm (optional 8~150mm)	±160°	>120°	rear fiber	0.92M	1280×720	IP67
ISV-L4515C	1.5m											
ISV-L4520C	2m											
ISV-L4530C	3m											
ISV-L6010C	1m	tungsten wire weaved cable	side view	four directions	6.0mm	8~150mm (optional 5~100mm)	±160°	>120°	rear fiber	0.92M	1280×720	IP67
ISV-L6015C	1.5m											
ISV-L6020C	2m											
ISV-L6030C	3m											
ISV-L6040C	4m											
ISV-L6050C	5m											

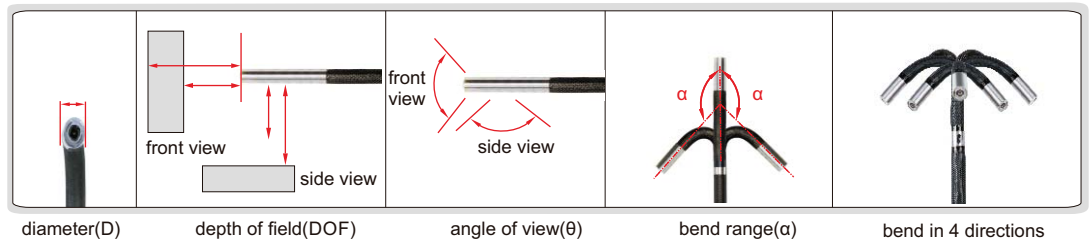

FOUR-DIRECTION CABLE, FRONT VIEW&SIDE VIEW

Code	Cable		Lens									
	length	type	view direction	bend direction	diameter (D)	depth of field(DOF)	bend range(α)	angle of view(θ)	illumination	pixel	resolution	dust/ waterproof
ISV-L6010S	1m	tungsten wire weaved cable	front view and side view	four directions	6.0mm	front view:	±160°	>120°	rear fiber	0.92M	1280×720	IP67
ISV-L6015S	1.5m					12~200mm (optional 3~70mm)						
ISV-L6020S	2m											
ISV-L6030S	3m											
ISV-L6040S	4m											
ISV-L6050S	5m					side view: 8~150mm (optional 3~70mm)						