

MEASURING ACCURACY OF ROUGHNESS TESTERS CAN BE IMPROVED,
IF THE CALIBRATION IS MADE ON A REFERENCE SPECIMEN WITH THE
ROUGHNESS VALUE CLOSE TO THE WORKPIECE TO BE MEASURED


SURFACE ROUGHNESS REFERENCE SPECIMENS

INSIZE PLUS
MADE IN EUROPE

- To calibrate roughness testers
- Meets ISO 5436-1: 2000
- Rust proof, made of pure Nickel

Code	Roughness (Ra)
ISR-RS525X	6.25 μm *
ISR-RS526X	3.15 μm *
ISR-RS527X	3.0 μm *
ISR-RS528X	0.5 μm *
ISR-RS529X	0.1 μm *
ISR-RS530X	1.0 μm *
ISR-RS531X	0.3 μm *

*The actual value may be slightly different

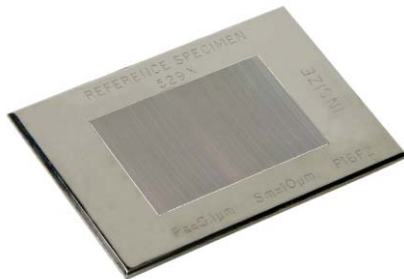

ISR-RS529X