

Tektronix®

Product Catalog

2021–2022

TEST & MEASUREMENT
SOLUTIONS
For Engineers by Engineers

Information



Get access to the product catalog
via the web.

sg.tek.com/e-catalog




See each page for details on our new products or visit www.tek.com

NEW 6 Series B MSO

Mixed Signal Oscilloscope

More channels. More bandwidth. Less Noise.

- Bandwidth Ranges: Up to 10 GHz
- Up to 8 Channels
- Sampling rate of up to 50 GS/s
- 12 Bits ADC Resolution. Up to 16-bits in High Res mode
- Excellent ENOB
- Low noise: less than 55 μ V, 1 mV / div, 1 GHz



→ See page 12 for more details

NEW Application Bundles

A great alternative to purchasing individual options

- Better value with more functions at a much lower cost
- Cost-effective to purchase capabilities to cover future needs or needs across engineering teams
- Include the most frequently combined options for key applications and industries
- Flexibility to adjust year-to-year with lower cost 1-year subscriptions



→ See page 21 for more details

NEW TekScope

PC Analysis Software

Remote analysis anytime, anywhere.

- Oscilloscope analysis without the oscilloscope
- Remotely connect to multiple oscilloscopes to view and analyze real-time data
- Share data with your colleagues and customers
- Enhance your measurements and analysis options



→ See page 23 for more details

NEW TekDrive

Collaborative T&M Data Workspace

Remotely share test and measurement data

- Secure anywhere-access to team's Data
- Inspect, analyze, and report on any device
- Save and recall directly on an oscilloscope
- Seamless collaboration with unlimited contributors



→ See page 24 for more details

NEW TIVP Series

IsoVu Isolated Probes

100% Isolation
New standards for isolated probe technology

- Bandwidth: DC - 1 GHz
- \pm 60 kV Common Mode Voltage range (DC - 1 GHz)
- CMRR: 160 dB (DC - 1 MHz), 100 dB (500 MHz)
- Up to \pm 2500 V differential input Voltage range



→ See page 31 for more details

NEW TBS1000C Series

Digital Storage Oscilloscope

Affordable performance in a compact design

- Bandwidth: 50 / 70 / 100 / 200 MHz
- 1 GS/s sample rate on all channels
- 7-inch WVGA color display with 15 horizontal divisions that shows 50% more signal
- Integrated courseware provides lab exercise guidance on the display that make learning and teaching easier



→ See page 4 for more details

NEW 2601B-PULSE System

SourceMeter® 10 μ s Pulser / SMU Instrument

High fidelity pulsing and sourcing

- Output 10 A @ 10 V with a 10 μ s pulse width
- Control loop system eliminates the need to manually tune (for load changes up to 3 μ H)




→ See page 48 for more details

NEW 4201-SMU / 4211-SMU / 4215-CVU

Delivers synchronizing current-voltage (I-V), capacitance-voltage (C-V) and ultra-fast pulsed I-V measurements

Low noise and low capacitance measurements

- 4215-CVU is the first C-V meter in its class capable of driving a 1 V AC source voltage and offers low-noise capacitance measurements
- Achieve stable low current measurements for I-V characterization with 4201-SMU/ 4211-SMU with a load capacitance of up to 10 μ F and 100 μ F respectively



→ See page 50 for more details

Note: All information on www.tek.com supersedes all other information.

TABLE OF CONTENTS

2021

Oscilloscopes

| | |
|--|----|
| NEW NEW TBS1000C Series | 4 |
| TBS2000B Series | 6 |
| TPS2000B Series | 8 |
| MSO/DPO2000B Series | 8 |
| Mixed Signal and Mixed Domain Selection Guide | 9 |
| MDO3000 Series | 10 |
| MDO4000C Series | 11 |
| NEW 3 Series MDO, 4/5/6B Series MSO | 12 |
| NEW Application Bundle | 21 |
| 5 Series MSO Low Profile / 6 Series Low Digitizer | 22 |
| NEW New TekScope PC Analysis Software | 23 |
| NEW NEW TekDrive Collaborative T&M Data Workspace | 24 |
| MSO/DPO70000C/DX Series | 25 |
| DPO70000SX Series | 27 |
| P7700 Series TekFlex™ TriMode™ Probes | 28 |
| Oscilloscope Probes | 29 |
| NEW TIVP IsoVu® Differential Isolated Measuremen | 31 |
| TPR Series Power Rail Probes | 32 |

Signal Generators / Optical Solutions

| | |
|---|----|
| AFG31000 Series Arbitrary / Function Generator | 33 |
| AFG1000 Series / AFG2021 Series Arbitrary / Function Generator | 35 |
| AWG5200 Arbitrary Waveform Generator | 36 |
| AWG70000B Arbitrary Waveform Generator | 37 |
| NEW TSO820 8 Series Sampling Oscilloscope | |
| NEW TCR801 Optical Clock Recovery | 38 |

Digital Multimeters

| | |
|--|----|
| DMM6500 6½-Digit Bench/System Digital Multimeter | 39 |
| DAQ6510 Data Acquisition and Logging Multimeter System | 39 |
| DMM7510 7½-Digit Graphical Sampling Multimeter | 40 |
| KickStart Instrument Control Software | 40 |
| DMM Comparison Table | 41 |
| Data Acquisition Systems | 43 |
| Ultra Sensitive Measurement | 44 |

DC Power Supply

| | |
|--|----|
| 2280S Series Precision Measurement DC Power Supply | 45 |
| 2281S Series Precision DC Power Supply with | 45 |
| Battery Test & Battery Simulation | |
| 2230 Multi-Channel USB and USB/GPIB Programmable | 46 |
| DC Power Supplies | |
| 2260B Programmable DC Power Supplies | 46 |
| Series 2290 High Voltage Power Supplies | 46 |

Source Measure Units

| | |
|--|----|
| 2400 Graphical Touchscreen Series SMU | 47 |
| 2400 Graphical Touchscreen Series SMU / I-V Curve Tracer Software | 48 |
| NEW 2601B-PULSE 10 µsec Pulser / SMU | 48 |
| Keithley Source Measure Units | 49 |
| Keithley Test Script Processor (TSP®) / Test Script Builder | 49 |
| Semiconductor Test System | 50 |

Spectrum Analyzers

| | |
|--|----|
| Real-Time Spectrum Analyzer | 51 |
| RSA5000B Real-Time Spectrum Analyzer | 51 |
| RSA306B USB Spectrum Analyzer | 52 |
| RSA500A / 600A Series USB Real Time Spectrum Analyzer | 53 |
| SignalVu-PC Vector Signal Analysis Software | 54 |
| DataVu-PC | 54 |
| EMCVu All-in-One Pre-compliance and Debug Solution | 55 |
| RSA7100B Real-Time Spectrum Analyzer | 55 |
| FCA/MCA3000 Series Frequency Counter/Timers | 56 |

Tektronix Service Solutions Organization (SSO) 57

Customer Support & Learning Resources 58

We're for the Engineer 59

Oscilloscopes

NEW TBS1000C Series

Digital Oscilloscope

Affordable performance in a compact design, the TBS1000C digital storage oscilloscope provides the features, versatility and durability




Width: 325mm Height: 155mm Depth: 107mm Weight: 2.0kg

- Bandwidth: 50 / 70 / 100 / 200 MHz
- 1 GS/s sample rate on all channels
- 7-inch WVGA color display with 15 horizontal divisions that shows 50% more signal
- Integrated courseware provides lab exercise guidance on the display that make learning and teaching easier
- 32 automated measurements
- Built-in oscilloscope handbook provides operating instructions and oscilloscope fundamentals
- Fanless design contributes to low noise operation
- Small footprint and light weight


Affordable Performance in a Compact Design

Low Noise Front End Design

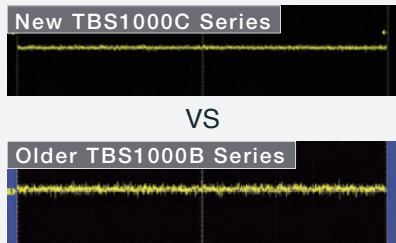


- Input sensitivity range 1 mV/div, Input impedance: 14 pF

Dual Window FFT

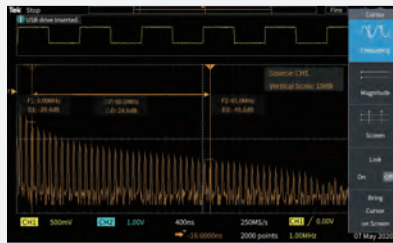


- Cursors: Time, Amplitude, Screen
- Simultaneous time and frequency domain views

Measurement based on Cursor

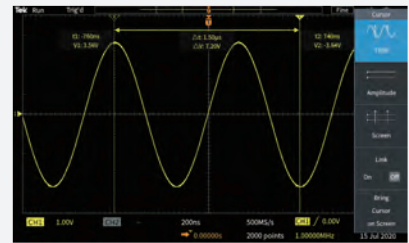


- Time, Amplitude and Screen Type Cursor
- Measured values can be displayed on waveform

Innovate Education Solutions

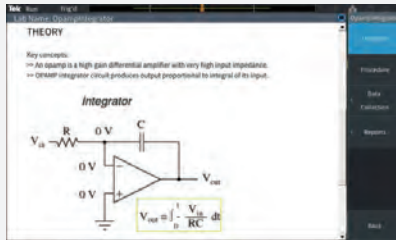


- Built-in oscilloscope handbook provides operating instructions and oscilloscope fundamentals
- HelpEverywhere® system with on-screen tips and hints throughout the user interface
- Built-in Courseware Lab Viewer

Enable / Disable Features

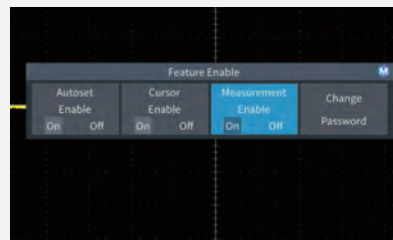

- Password protected to enable/disable autoset, cursors and measurements
- Enable Educators to teach basic concepts of signal capture, analysis and provides operating instructions

OpenChoice® Communications Software





- Remote screen capture
- Capture waveform data
- Get / send instrument settings

Offers Features that Enable the Educator to Teach Fundamental Concepts



Easy to use Standard Probe

The Tektronix probe tip is only 3.8mm, providing easy access to your device.




Note:
One probe per analog channel

TekScope PC Analysis Software

Access easily to your remote oscilloscope and analyze waveforms anywhere, anytime

KickStart [Keithley Control Software]

Automated data collection from multiple instruments

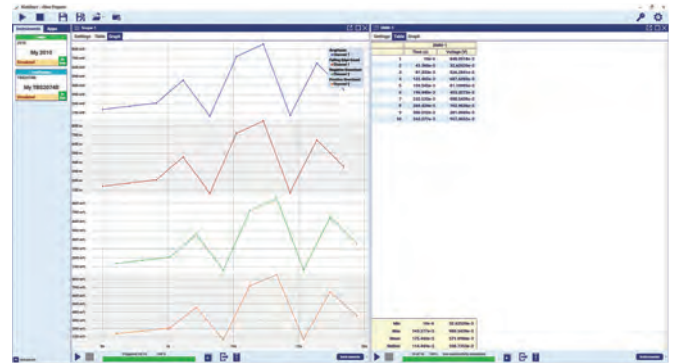

| Product Specifications | TBS1052C | TBS1072C | TBS1102C | TBS1202C |
|-------------------------------|--|----------|----------|----------|
| Channels | 2 | | | |
| Bandwidth | 50MHz | 70MHz | 100MHz | 200MHz |
| Sample Rate (on all channels) | 1GS/s | | | |
| Rise Time | 8.4ns | 5.5ns | 4ns | 2.5ns |
| Input Sensitivity Range | 1mV/div-10V/div | | | |
| Vertical Zoom | Vertically expand or compress a live or stopped waveform | | | |
| Offset Range | 1mV/div-50mV/div: ±1V, 100mV/div-500mV/div: ±10V, 1V/div-5V/div: ±100V | | | |
| DC Gain Accuracy | ±3% | | | |
| Vertical Resolution | 8 bits | | | |
| Bandwidth Limit | 20MHz (Typ) | | | |
| Input Coupling | AC, DC | | | |
| Input Impedance | 1MΩ ±2% (14pF±2pF) | | | |
| Maximum Input Voltage | 300 VRMS, Installation Category II; derate above 4 MHz at 20 dB per decade to 200 MHz | | | |
| Horizontal Zoom | Horizontally expand or compress a live or stopped waveform | | | |
| Timebase Range | 2ns/div-100s/div | | | |
| Record Length | 20 K points | | | |
| Timebase Accuracy | 20ppm | | | |
| External Trigger Input | Included on all models | | | |
| Input Output Ports | USB 2.0 Host Port - Supports USB mass storage devices, USB 2.0 device port - Rear-panel connector allows for communication/control of oscilloscope through USBTMC or GPIB with a TEK-USB-488 | | | |

Probe: PP0200 200 MHz passive probe (TBS1202C), TPP0100 100 MHz passive probe (TBS1102C, TBS1072C, TBS1052C) per analog channel

Recommended accessories

- RM2000B..... Rackmount kit
- TEK-USB-488..... GPIB-to-USB converter
- 174-4401-xx..... USB host to device cable, 90cm

5-year Warranty

Covering all labor and parts, excluding probes and accessories



Recommended probes → (See page 29 - 30 for more details).

- P2221.....1X/10X passive probe, 200 MHz bandwidth
- P6101B.....1X passive probe (15 MHz, 300 VRMS CAT II rating)
- P6015A.....1000X high-voltage passive probe (75 MHz)
- P5100A.....100X high-voltage passive probe (500 MHz)
- P5200A.....50 MHz, 50X/500X high-voltage differential probe
- P6021A.....15 A, 60 MHz AC current probe
- P6022.....6 A, 120 MHz AC current probe
- A621.....2000 A, 5 to 50 kHz AC current probe
- A622.....100 A, 100 kHz AC/DC current probe/BNC
- TCP303/TCPA300*1.....150 A, 15 MHz AC/DC current probe/amplifier
- TCP305A/TCPA300*1.....50 A, 50 MHz AC/DC current probe/amplifier
- TCP312A/TCPA300*1.....30 A, 100 MHz AC/DC current probe/amplifier
- TCP404XL/TCPA400*1.....500 A, 2 MHz AC/DC current probe/amplifier
- TCP2020.....20A, 50MHz AC/DC current probe

*1 BNC cable (012-0076-00) and 50Ω termination (011-0049-02) are required.

TBS2000B Series

Digital Storage Oscilloscope

An affordable, powerful scope that delivers more on your bench



[2ch Model] Width: 372mm Height: 175mm Depth: 103mm Weight: 2.62kg
 [4ch Model] Width: 413mm Height: 202mm Depth: 128mm Weight: 4.17kg

- Maximum Bandwidth: 200 MHz
- Max Sample Rate: 2 GS/s sampling rate
- TekVPI probe interface supports active, differential, and current probes with automatic scaling and units
- New lower noise front end design offers lower random noise, better signal integrity and more accurate measurements.
- Search and Mark features for easy identification of events that occur in the acquired waveform
- 32 automated measurements, and FFT function for quick waveform analysis
- HelpEverywhere® provides helpful on-screen tips for new users
- Wireless connection with USB wireless LAN adapter*
- Extensive software for educational institutions

* USB wireless LAN adapter must be ordered separately

See More - Designed to display more signal than ever

Large 9-inch Display




15 horizontal divisions shows 50% more signal

Quickly Search for Events of Interest



Search and Mark features for easy identification of events that occur in the acquired waveform

Low Noise Front End Design

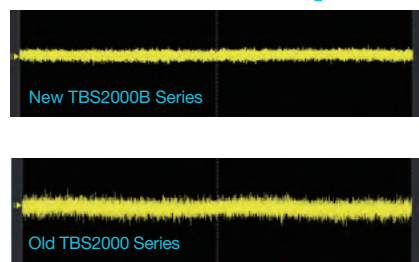

Offers lower noise and higher effective bits enabling more accurate measurements


Analyze More - Designed to perform wide range of Measurements and Complex Analysis

TekVPI® Probe Interface




TekVPI probes communicate scale settings, ranges, and status to the TBS2000B

Easy Automated Measurements/ Cursor Measurements

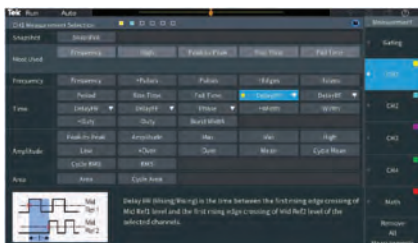

Measurements are all listed and selected on a single screen

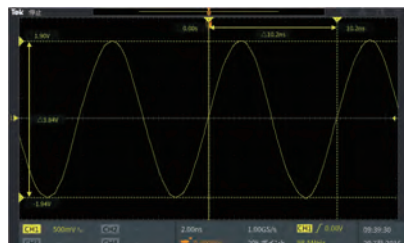


Innovative cursor measurements with on-waveforms readouts

Access More - Designed with flexible I/O for data transfer and remote access to instrument

Supports a Wide Range of Interfaces



Wi-Fi adapters are configured through integrated setup menus and support seamless wireless communications



Easily capture, save, and analyze measurement results using the OpenChoice® PC Communications Software.




Built-in web page enables remote control of horizontal and vertical scale, trigger settings, and measurements.


Innovative Education Solutions for easy learning and teaching



HelpEverywhere® tips explain important settings.

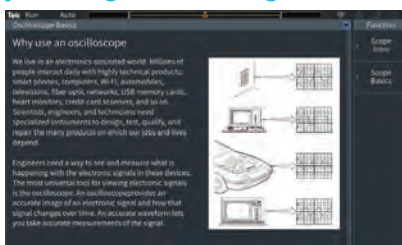

Scope Intro covers basic oscilloscope and TBS2000B usage

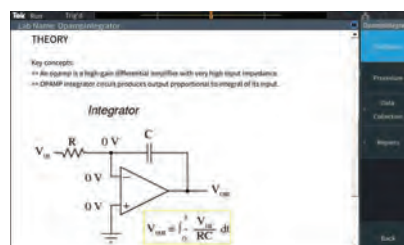

The Courseware function allows students to see lab information on the instrument display.

| Models | TBS2072B | TBS2074B | TBS2102B | TBS2104B | TBS2202B | TBS2204B |
|-----------------|--|----------|----------|----------|----------|----------|
| Analog Channels | 2 | 4 | 2 | 4 | 2 | 4 |
| Bandwidth | 70MHz | 70MHz | 100MHz | 100MHz | 200MHz | 200MHz |
| Max Sample Rate | 1 GS/s - All Channels, 2 GS/s - Half Channel | | | | | |
| Rise Time | 5ns | 5ns | 3.5ns | 3.5ns | 1.75ns | 1.75ns |

| Models | TBS2072B | TBS2074B | TBS2102B | TBS2104B | TBS2202B | TBS2204B |
|-----------------------------|---|----------|----------|----------|----------|----------|
| Input Sensitivity Range | 2mV/div~10V/div | | | | | |
| DC Gain Accuracy | ± 2 (10V/div~5mV/div) ±3% (typical 1 mV/div) | | | | | |
| Vertical Resolution | 8 bits | | | | | |
| Hardware Bandwidth Limits | 20MHz (typical) | | | | | |
| Input Coupling | AC, DC, GND | | | | | |
| Input Impedance | 1 MΩ ± 1 %, 13 pF ± 1.5 pF | | | | | |
| Maximum Input Voltage, 1 MΩ | 300V rms (Installation Category II; with peaks ≤ ±450V) | | | | | |
| Time Base Range | TBS220x: 1ns/div~100s/div, TBS207x, TBS210x: 2ns/div~100s/div | | | | | |
| Record Length | 5M | | | | | |
| Automated Measurements | 32 | | | | | |
| FFT | Standard | | | | | |
| Probe Interface | TekVPI Probe Interface | | | | | |
| Input Ports | USB2.0 (2 host ports, 1 device port), LAN, Aux Out, WiFi (optional) | | | | | |
| Display Type | 9 inch wide format liquid crystal TFT color display. | | | | | |
| Display Resolution | 800 (horizontal) × 480 (vertical) displayed pixels (WVGA) | | | | | |

Accessories: 100MHz passive probe TPP0100 (for 100MHz / 70MHz model) / 200MHz passive probe TPP0200 (for 200MHz model) (2: 2 channel model, 4: 4 channel model), manual
Manual (Web download), installation / safety manual, power cable, calibration certificate

Option

Opt. D1.....Calibration Data Report.

Recommended Accessories

- TPA-BNC.....TekVPI® to TekProbe® BNC adapter
- TEK-DPG.....TekVPI® Deskew pulse generator signal source
- 067-1686-xx.....Power measurement deskew and calibration fixture
- ACD2000*.....Soft transit case for TBS2000B 2-channel instrument
- ACD4000B*.....Soft transit case, for TBS2000B 4-channel instrument
- TEK-USB-488.....GPIB-to-USB adapter

* The TBS2000B series does not have a front cover. ACD2000 and ACD4000B also have a front cover. Please note that it is not included (the front cover that comes with the ACD2000 is for DPO / MSO2000B).

5-year warranty

Covering all labor and parts, excluding probes and accessories





Recommended Probes

- P5100A**.....2.5 kV, 500 MHz, 100X high-voltage passive probe
- TDPO500**.....500 MHz TekVPI® differential voltage probe with ±42 V differential input voltage
- TAP1500**.....1.5 GHz TekVPI® active voltage probe
- THDP0200**.....50 MHz TekVPI® 20 Ampere AC/DC current probe
- THDP0100**.....±6 kV 100 MHz high-voltage differential probe
- TCP0030A**.....120 MHz TekVPI® 30 Ampere AC/DC current probe
- TCP0020**.....50 MHz TekVPI® 20 Ampere AC/DC current probe
- TCP0150**.....20MHz AC/DC

TekSmartLab/TekBench: Lab instrument management solution for quickly setting up and efficiently managing basic electronics in engineering laboratories!

TekSmartLab

- Easy to setup with industrial reliability
- Intuitive instructor - course - exercise organization
- Centralized monitoring and remote assistance
- Online editing and submission of test reports
- Automatic instrument asset information recording
- License transfer between different PCs

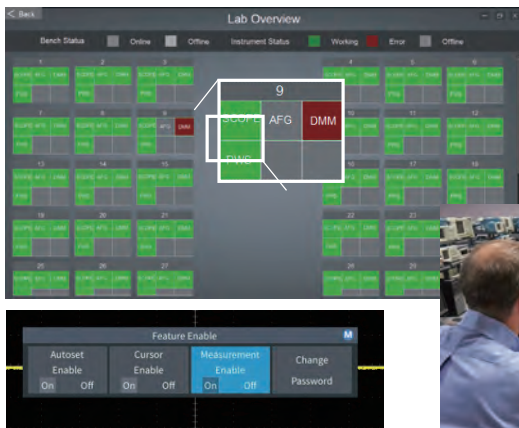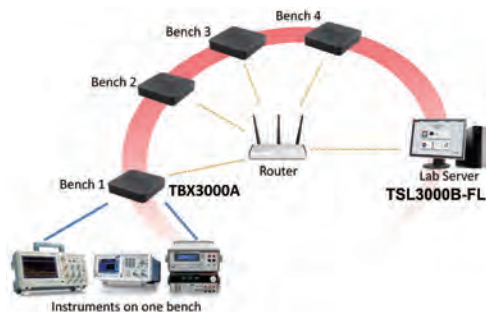

Automatic measurement function can be turned Off

Lab managers can efficiently manage Setup configurations of large fleets of instruments with one click



TekBench



- Simple connection to instruments with an intuitive interface to control and monitor instruments
- Automated measurements with data logging and trend plotting
- Automated frequency response analysis

TPS2000B Series

Digital Storage Oscilloscope

4-Channel IsolatedChannel™ Technology for floating or differential measurements



Weight: 336mm Height: 161mm Depth: 130mm Weight: 3.2kg (With 1 battery)

- Highest Bandwidth~200MHz
- Record Length: 2.5k points
- Highest Sample Rate~2GS/s
- Waveform capture rate: 180 waveforms / sec
- Display type: 5.7 inch

- With up to 4-isolated channels to safely make floating or differential measurements
- FFT standard on all models
- Compact design
- Hot-swappable battery pack with up to 8 hours of continuous battery operation
- Optional power application software

Key Features

- Safely and easily make 4-Channel floating measurements
- 8 hours of continuous battery operation
- Compact and easy to carry

Recommended Accessories

TPSBAT..... Lithium-ion battery
TPSCHG..... Battery charger

Software Option

TPS2PBD2..... Power Measurement Bundle:
TPS2PWR1 Module and Four P5122 Probes
TPS2PWR1..... Application Module:
Power Measurement and
Analysis Software

3-year Warranty

Covering all labor and parts,
excluding probes and accessories



*1 Do not float the TPP0101/TPP0201 probe common lead to >30 V_{RMS}

| Basis Specifications | TPS2012B | TPS2014B | TPS2024B |
|---|---|-------------|---------------|
| Isolated Channels | 2 | 4 | 4 |
| Bandwidth | 100MHz | 100MHz | 200MHz |
| Sample rate per channel | 1GS/s | 1GS/s | 2GS/s |
| Rise time | 3.5ns | 3.5ns | 2.1ns |
| Detailed Specifications | TPS2012B | TPS2014B | TPS2024B |
| Vertical Sensitivity | 2mV~5V/div | | |
| DC vertical accuracy | ±3% (5V/div~10mV/div), ±4% (5mV/div and 2mV/div) | | |
| Vertical resolution | 8 bits | | |
| Bandwidth limit | 20MHz | | |
| Maximum input voltage (1 MΩ) | 300V _{RMS} CAT II 1000V _{RMS} CAT I (When using P5122 probe) | | |
| Float voltage (BNC shiel to earth ground) | 600V _{RMS} CAT II | | |
| Horizontal System (Seconds/division range) | 5ns~50s/div | 5ns~50s/div | 2.5ns~50s/div |
| Record length | 2.5k points | | |

Accessories: Passive probe TPP0201*1 (TPS202x type) or passive probe TPP0101*1 (TPS201X type) is included for each channel, Lithium-ion battery with fuel gauge for 4-hour battery life. Two required for 8 hours of continuous battery operation, Front panel cover, RS232-USB adapter cable (174-5813-xx), AC adapter with power cable, calibration certificate.

MSO/DPO2000B

Mixed Signal / Digital Phosphor Oscilloscope

Delivers advanced debug features at an entry-level price



Width: 377mm Height: 180mm Depth: 134mm Net Weight: 3.6kg

- Highest Bandwidth: 200MHz
- Record Length: 1M points
- Highest Sample Rate: 1 GS/s
- Maximum waveform capture rate:
Up to 5,000 wfm/s
- Display type: 7 inch

- Small footprint and lightweight
- FilterVu™ variable low-pass filter
- Maximum number of bus display: 2
- TekVPI® probe interface
- 16 digital channels (MSO series)

Key Features

- FilterVu™ variable low-pass filter allows for removal of unwanted signal noise while still capturing high-frequency events

Recommended accessories

TPS2PBD2 Power Measurement Bundle
TEK-USB-488 GPIB-to-USB adapter
TEK-DPG*1 TekVPI® Deskew pulse generator
signal source
067-1686-xx Power measurement deskew and
calibration fixture
ACD2000 Soft transit case
(Front protective cover: 200-5045-xx)
RMD2000 Rackmount kit
(Part number: 351-1095-xx is
sold separately)
DPO2CONN Ethernet (10/100Base-T) and video
out port
119-8726-xx TekVPI external power supply
(Power cable: 161-0342-xx required)

Software Option

DPO2EMBD Application Module: Embedded Serial
Triggering and Analysis (I²C, SPI)
DPO2BND Application Module: Bundle module,
including DPO2AUTO, DPO2COMP &
DPO2EMBD, for MSO/DPO2000B Series

5-year Warranty

Covering all labor and parts,
excluding probes and accessories





















| Basic Specifications | MSO/DPO 2002B | MSO/DPO 2004B | MSO/DPO 2012B | MSO/DPO 2014B | MSO/DPO 2022B | MSO/DPO 2024B |
|----------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Analog Channels | 2 | 4 | 2 | 4 | 2 | 4 |
| Bandwidth (-3dB) | 70MHz | 70MHz | 100MHz | 100MHz | 200MHz | 200MHz |
| Sample Rate | 1GS/s | | | | | |
| Rise time | 5.0ns | | 3.5ns | | 2.1ns | |
| Record Length | 1M points | | | | | |

| Vertical system digital channels | |
|-----------------------------------|---|
| Hardware bandwidth limits | 20MHz |
| Input coupling | AC, DC, GND |
| Input impedance | 1MΩ±2%, 11.5pF±2pF |
| Input sensitivity range, 1MΩ | 2mV/div~5V/div |
| Vertical resolutions | 8 bits |
| Maximum input voltage, 1 MΩ | 300 V _{RMS} with peaks ≤ ±450 V |
| DC gain accuracy | ±3% (10mV/div~5V/div), ±4% (2mV/div, 5mV/div) |
| Vertical System (MSO Series only) | |
| Input channels | 16 digital (D15 to D0) |
| Maximum input voltage | ±40V |
| Input dynamic range | 80 Vpk-pk (threshold setting dependent) |

Accessories: One TPP0100 100MHz, 10X Passive Probe Per Analog Channel (70 MHz model), One TPP0200 200 MHz, 10X Passive Probe Per Analog Channel (100 MHz & 200 MHz models), One P6316 16 Channel Logic Probe (MSO only), OpenChoice® Desktop Software Calibration Certificate, Quick Reference Manual & Documentation on CD, Power Cord

*1 TekVPI external power supply (119-8726-xx) and power cable (161-0342-xx) are required

MDO/MSO Series Selector Guide

| Series | Model | Analog Channels | Display | Bandwidth | Sample Rate | Record Length | Waveform Capture Rate | Serial Trigger and Analysis | Key Features |
|---|----------|-----------------|---|--|--|---------------|---|---|--|
| MDO3000 Mixed Domain Oscilloscope Integrated Spectrum Analyzer. The ultimate general purpose oscilloscope.  1. Oscilloscope 2. Spectrum Analyzer 3. Arbitrary Function Generator 4. Protocol Analyzer 5. Protocol Analyzer 6. DVM/Counter 6 in 1 Width: 417mm Height: 203mm Depth: 147mm Weight: 4.2kg | MDO3012 | 2 | 9-inch display [wide-screen]  | 100MHz | 2.5GS/s | 10 Mpoints |  >235,000 wfms/s with FastAcq® | I²C/SPI,*2 CAN-FD/ CAN/LIN, FlexRay, USB2.0, RS-232/422/ 485/UART, MIL-STD-1553, ARINC-429, I²S*3 | <ul style="list-style-type: none"> The Ultimate 6-in-1 Integrated Oscilloscope <ul style="list-style-type: none"> Spectrum Analyzer Logic Analyzer Arbitrary Function Generator Protocol Analyzer DVM/Counter Completely customizable, providing what you need now – and later Option to add 16 digital channels Frequency Domain Specifications <ul style="list-style-type: none"> Frequency range: (Standard) 9 kHz - Analog BW, (Optional) 9 kHz - 3 GHz *1 The maximum sample rate will change depending on the number of channels selected. *2 *3 Signal Inputs - any Ch1-Ch4, any DO-D15 |
| | MDO3014 | 4 | | | | | | | |
| | MDO3022 | 2 | | | | | | | |
| | MDO3024 | 4 | | | | | | | |
| | MDO3032 | 2 | | | | | | | |
| | MDO3034 | 4 | | | | | | | |
| | MDO3052 | 2 | | | | | | | |
| | MDO3054 | 4 | | | | | | | |
| MDO3102 | 2 | 1GHz | 5GS/s*1 | >280,000 wfms/s with FastAcq® | | | | | |
| MDO4000C Mixed Domain Oscilloscope Solve the toughest embedded design challenges quickly and efficiently.  1. Oscilloscope 2. Spectrum Analyzer 3. Arbitrary Function Generator 4. Logic Analyzer 5. Protocol Analyzer 6. DVM/Counter 6 in 1+ Width: 439mm Height: 229mm Depth: 147mm Weight: 5.5kg | MDO4024C | 4 | 10.4 inch display [color]  | 200MHz | 2.5GS/s | 20 Mpoints |  >270,000 wfms/s with FastAcq® | I²C, SPI, Ethernet, CAN-FD/ CAN/LIN, USB2.0, RS-232/422/ 485/UART, MIL-STD-1553, ARINC 429, I²S/LJ/RJ/ TDM | <ul style="list-style-type: none"> Performance 6-in-1 integrated oscilloscope for design and debug, EMI Troubleshooting, General Purpose RF Design and Integration >340,000 wfms/s maximum waveform capture rate (FastAcq™) high probability of quickly seeing the infrequent problems MSO (optional) Analog (4ch) + Digital (16ch) time correlation display Time-synchronized capture of spectrum analyzer with analog and digital acquisitions Optional digital 16ch can be added frequency domain specifications Frequency Domain Specifications <ul style="list-style-type: none"> Frequency range of 9 kHz - 3 GHz or 9 KHz - 6 GHz |
| | MDO4034C | | | 350MHz | | | | | |
| | MDO4054C | | | 500MHz | | | | | |
| | MDO4104C | | | 1GHz | | | | | |
| 3 Series MDO Largest display in class and improved low-level signal measurement accuracy  Width: 370mm Height: 252mm Depth: 148.6mm Weight: 5.31kg | MDO32 | 2 | 11.6-inch HD display [color]  | 100MHz 200MHz 350MHz 500MHz 1GHz bandwidth model | 2.5 GS/s (All channels) | 10 Mpoints |  >280,000 wfms/s with FastAcq® | MIL-STD-1553, ARINC429, I²S, LJ, RJ, TDM, CAN, CAN FD, LIN, FlexRay, RS-232/422/ 485/UART, I²C, SPI, USB 2.0 | <ul style="list-style-type: none"> 11.6-inch HD (1,920 × 1,080) display with capacitive touchscreen Use intuitive pinch, swipe, zoom gestures on the display Unique built-in spectrum analyzer (1 GHz comes standard on all models / 3 GHz is optional) Integrated AFG, MSO, DVM, Serial Bus Decode function (optional) Low noise, class-leading high ENOB (Vibrant bit) |
| | MDO34 | 4 | | 5 GS/s (1 GHz model) | | | | | |
| 4 Series MSO Extreme visibility, versatility and usability for any bench  Width: 405mm Height: 249mm Depth: 155mm Weight: <7.6kg | MSO44 | 4 Flex Channel | 13.3-inch HD display [color]  | 200MHz 350MHz 500MHz 1GHz 1.5GHz bandwidth model | 6.25GS/s | 31.25 Mpoints |  >500,000 waveforms/s with FastAcq® | MIL-STD-1553, ARINC429, I²S, LJ, RJ, TDM, CAN, CAN FD, LIN, FlexRay, SENT, RS-232/422/ 485/UART, I²C, SPI, 10BASE-T, 100BASE-TX, I3C, SPMI, USB 2.0, SPACEWIRE | <ul style="list-style-type: none"> 13.3-inch HD (1,920 × 1,080) display with capacitive touchscreen Use intuitive pinch, swipe, zoom gestures on the display Vertical resolution: 12-bit ADC FlexChannel® input to each channel, can be configured as 1 analog or 8 digital channels Built-in optional AFG, MSO, DVM, serial protocol decoding Various analysis options (power, serial bus trigger, decode and analysis, RF vs Time analysis, etc) |
| | MSO46 | 6 Flex Channel | | 62.5 Mpoints (Optional) | | | | | |
| 5 Series MSO The largest display. The Most Channels. The Greatest Experience.  Width: 454mm Height: 309mm Depth: 205mm Weight: <11.4kg | MSO54 | 4 Flex Channel | 15.6-inch HD display [color]  | 350MHz 500MHz 1GHz 2GHz bandwidth model | 6.25GS/s | 62.5 Mpoints |  >500,000 waveforms/s with FastAcq® | MIL-STD-1553, ARINC429, I²S, LJ, RJ, TDM, CAN, CAN FD, LIN, FlexRay, SENT, RS-232/ 422/485/UART, I²C, SPI, 10BASE-T, 100BASE-TX, I3C, SPMI, USB 2.0, SPACEWIRE, 100BASE-T1 | <ul style="list-style-type: none"> Vertical resolution: 12-bit ADC, up to 16-bits in High Res mode 4, 6, or 8 FlexChannel® inputs With 4 or 6 FlexChannel inputs (each flex channel provides one analog signal or can be configured to 16 digital channels) 15.6-inch HD (1,920 × 1,080) display with capacitive touchscreen Configurable OS: Optional Windows 10 operating system Powerful analysis options (Power analysis, Ethernet for Automotive Compliance test, etc.) |
| | MSO56 | 6 Flex Channel | | 125/ 250/ 500 Mpoints (optional) | | | | | |
| | MSO58 | 8 Flex Channel | | | | | | | |
| 6 Series B MSO More Bandwidth. More Channels. Less Noise.  Width: 454mm Height: 309mm Depth: 205mm Weight: <13.52kg | MSO64B | 4 Flex Channel | 15.6-inch HD display [color]  | 1GHz 2.5GHz 4GHz 6GHz 8GHz 10GHz bandwidth model | 2ch: 50GS/s 4ch: 25GS/s 6 or 8ch: 12.5GS/s | 62.5 Mpoints |  >500,000 wfms/s (Peak Detect, Envelope acquisition mode), >30,000 wfms/s (all other acquisition modes) FastAcq® | MIL-STD-1553, ARINC429, I²S, LJ, RJ, TDM, CAN, CAN FD, LIN, FlexRay, SENT, RS-232/ 422/485/ UART, I²C, SPI, 10BASE-T, 100BASE-TX, I3C, SPMI, USB 2.0, SPACEWIRE, 100BASE-T1 | <ul style="list-style-type: none"> Best signal fidelity with 12-bit ADCs and ultra-low noise 4, 6 or 8 FlexChannel™ inputs, with 8 digital inputs available for each channel 15.6-inch HD display with capacitive multi-touch touchscreen TekVPI probes communicate with the scope to simplify setup, reduce errors and many probes feature status indicators and controls Powerful statistics and trends provide deep insight. Provides application specific advanced measurements and automated solutions Upgrade at any time to meet future needs |
| | MSO66B | 6 Flex Channel | | 125/ 250/ 500 Mpoints or 1 Gpoints (optional) | | | | | |
| | MSO68B | 8 Flex Channel | | | | | | | |

MDO3000

Mixed Domain Oscilloscope



Width: 417mm Height: 203mm Depth: 147mm Weight: 4.2kg

Integrated Spectrum Analyzer.
The ultimate general purpose oscilloscope.

- Bandwidth is upgradable (up to 1 GHz), up to 5 GS/s sample rate
- With >280,000 wfms/s with FastAcq, it becomes a powerful design and debug tool
- Integrated spectrum analyzer with frequency range: (Standard) 9 kHz - Analog BW, (Optional) 9 kHz - 3 GHz

1. Oscilloscope
2. Spectrum Analyzer
3. Arbitrary Function Generator
4. Logic Analyzer
5. Protocol Analyzer
6. DVM/Counter

6 in 1

| | MDO3014 MDO3012 | MDO3024 MDO3022 | MDO3034 MDO3032 | MDO3054 MDO3052 | MDO3104 MDO3102 |
|--|--|--------------------|--------------------|--------------------|--|
| Oscilloscope Specifications | | | | | |
| Analog channel bandwidth | 100MHz | 200MHz | 350MHz | 500MHz | 1GHz |
| Analog channels | 2 or 4 | | | | |
| Sample Rate | 2.5GS/s (all channels) | | | | 2.5GS/s (3 or 4ch) 5GS/s (1 or 2ch) |
| Record length (all channels) | 10 Mpoints | | | | |
| Maximum waveform capture rate | >235,000 wfms/s (FastAcq™) | | | | >280,000 wfms/s (FastAcq™) |
| Input coupling | AC, DC | | | | |
| Input impedance | 1M1MΩ±1%, 75Ω±1%, 50Ω±1% | | | | 1MΩ±1%, 50Ω±1% |
| Input sensitivity range, 1MΩ, 75Ω/50Ω | 1mV/div~10V/div (1MΩ), 1mV/div~1V/div (75Ω*/50Ω) | | | | |
| Vertical resolution | 8 bits (11 bits with Hi Res) | | | | |
| Maximum input voltage, 1MΩ, 75Ω/50Ω | 300 VRMS CAT II with peaks ≤ ±425 V (1MΩ), 5 VRMS with peaks ≤ ±20 V (75Ω*/50Ω) | | | | |
| DC gain accuracy | ±1.5% (5mV/div and above), ±2.0% (2mV/div), ±2.5% (1mV/div) | | | | |
| Spectrum Analyzer Specifications | | | | | |
| Standard spectrum analyzer frequency range | 9kHz~100MHz | 9kHz~200MHz | 9kHz~350MHz | 9kHz~500MHz | 9kHz~1GHz |
| Optional spectrum analyzer frequency range | 9kHz~3GHz (with MDO3SA option) | | | | |
| Maximum capture bandwidth | Ultra-wide capture bandwidth up to 3 GHz | | | | |
| Span | All models: 9 kHz – 3 GHz with option MDO3SA, in a 1-2-5 sequence | | | | |
| Resolution bandwidth | 20 Hz - 150 MHz in a 1-2-3-5 sequence | | | | |
| Displayed average noise level (DANL) | 9 kHz - 50 kHz < -109 dBm/Hz (< -117 dBm/Hz with TPA-N-PRE preamp attached) 50 kHz - 5 MHz < -126 dBm/Hz (< -136 dBm/Hz with TPA-N-PRE preamp attached) 5 MHz - 2 GHz < -136 dBm/Hz (< -146 dBm/Hz with TPA-N-PRE preamp attached) 2 GHz - 3 GHz < -126 dBm/Hz (< -136 dBm/Hz with TPA-N-PRE preamp attached) | | | | |
| Phase noise at 1 GHz CW | 10 kHz: < -81 dBc/Hz, < -85 dBc/Hz (typical) 100 kHz: < -97 dBc/Hz, < -101 dBc/Hz (typical) 1 MHz: < -118 dBc/Hz, < -122 dBc/Hz (typical) | | | | |

*75 Ω not available on 1 GHz models (MDO3104 and MDO3102).

| Logic Analyzer (Requires Opt. MDO3MSO) | |
|---|--|
| Digital channel | 16 ch (One P6316 16-channel logic probe) |
| Maximum sample rate (Main) | 500 MS/s (2 ns resolution) |
| Maximum sample rate (MagniVu) | 8.25 GS/s (121.2 ps resolution) |
| Input channels | 16 digital (D15 to D0) |
| Thresholds | Threshold per set of 8 channels |
| Arbitrary Function Generator (Requires Opt. MDO3AFG) | |
| AFG | Outputs: 1 (13 predefined waveforms and arbitrary waveform generation) |
| AFG Waveforms | Sine, Square, Pulse, Ramp/Triangle, DC, Noise, Sin(x)/x (Sinc), Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine, Cardiac, and Arbitrary. |
| AFG Frequency Range | 50MHz (Sine), 25MHz (Square / Pulse), 5MHz (Gaussian, Lorentz, Exponential Rise/Decay, Haversine, and Arbitrary), 2MHz (Sin(x)/x), 500kHz (Ramp / Triangle, Cardiac) |
| Amplitude Range | 10mV~2.5Vmax (50Ω) 20mV~5Vmax (Hi-Z) |
| Arbitrary Memory Depth | 1 to 128 k |
| Arbitrary Sample Rate | 250MS/s |
| Digital Voltmeter and Frequency Counter (Available free of charge when the product is registered on the web) | |
| Voltage Measurement | Digital Voltmeter Resolution: 4 digits, AC RMS, DC, AC+DC RMS |
| Frequency Measurement | Frequency: 5 digits, Maximum input frequency: 150MHz, 100MHz (100MHz Models) |
| Frequency Accuracy | ±(10 μHz/Hz + 1 count) |

3-year warranty

Covering all labor and parts,
excluding probes and accessories



Standard Accessories: One passive voltage probe per analog channel (100 / 200MHz model: TPP0250 type, 350 / 500MHz model: TPP0500B type, 1GHz model: TPP1000 type), N-to-BNC adapter (103-0473-00), Documentation CD (063-4526-xx), installation and safety instruction manual (071-3249-xx), accessory bag (016-2008-xx), power cable, OpenChoice® desktop software, calibration certificate

Application Modules

- MDO3AUTO** Automotive Serial Triggering and Analysis Module (CAN, CAN FD, LIN)
MDO3COMP RS-232/422/485/UART Computer Serial Triggering and Analysis Module
MDO3EMBD Embedded Serial Triggering and Analysis Module (I2C, SPI)
MDO3PWR Power Analysis Application Module
MDO3BND* MDO3000 Application module
 * Includes all the above modules.

Recommended Accessories

- 119-4146-00** Near field probe set, 100 kHz - 1 GHz
119-6609-00 Flexible monopole antenna
TPA-N-PRE Preamplifier, 12 dB nominal Gain, 9 kHz - 6 GHz
TPA-N-VPI N-to-TekVPI adapter
TPA-BNC TekVPI® to TekProbe™ BNC adapter
TEK-USB-488 GPIB-to-USB adapter
ACD3000 Soft transit case (includes front protective cover)
HCTEK4321 Hard transit case (requires ACD3000)
RMD3000 Rackmount kit (351-1095-00 - sold separately)
TEK-DPG TekVPI Deskew pulse generator signal source
067-1686-02 Power measurement deskew and calibration fixture
SignalVu-PC Vector Signal Analysis Software
200-5052-00 MDO3000 Front protective cover

Instrument Options

- Opt.MDO3AFG** Arbitrary function generator with 13 predefined waveforms and arbitrary waveform generation (1 ch)
Opt.MDO3MSO 16 digital channels; includes P6316 digital probe and accessories
Opt.MDO3SA Increase spectrum analyzer input frequency range to 9 kHz – 3 GHz and capture bandwidth to 3 GHz.

MD04000C Series

Mixed Domain Oscilloscope



Width: 439mm Height: 229mm Depth: 147mm Weight: 5.1kg

Speeding up each stage of debug even more!
Synchronize RF, analog and digital channels –
giving unprecedented insight into your design.

- Bandwidth of up to 1 GHz, up to 5 GS/s sample rate
- >340,000 wfms maximum waveform capture rate and powerful trigger function
- Spectrum Analyzer (optional)
Time-synchronized capture of spectrum analyzer with analog, digital and RF signals

6 in 1⁺

1. Oscilloscope
2. Spectrum Analyzer
3. Arbitrary Function Generator
4. Logic Analyzer
5. Protocol Analyzer
6. DVM/Counter

| | MDO4024C | MDO4034C | MDO4054C | MDO4104C |
|---|--|----------|----------|--|
| Oscilloscope Specifications | | | | |
| Analog Channel Bandwidth | 200MHz | 350MHz | 500MHz | 1GHz |
| Analog Channels | 4 | | | |
| Sample Rate | 2.5 GS/s (all channels) | | | 2.5GS/s (4ch with SA) 5GS/s (4ch w/o SA, 2ch with SA) |
| Maximum Record Length (all channels) | 20 Mpoints | | | |
| Waveform Capture Rate | >270,000 wfms/s (FastAcq™) | | | >340,000 wfms/s (FastAcq™) |
| Input Coupling | AC, DC | | | |
| Input Impedance | 1MΩ±1%, 50Ω±1% | | | |
| Input Sensitivity Range, 1MΩ/50Ω | 1mV/div–10V/div (1MΩ), 1mV/div–1V/div (50Ω) | | | |
| Vertical Resolution | 8 bits (11 bits with Hi Res) | | | |
| Maximum Input Voltage, 1MΩ/50Ω | 300 V _{RMS} CAT II with peaks ≤ ±425 V (1MΩ), 5 VRMS with peaks ≤ ±20 V (50Ω) | | | |
| DC Gain Accuracy | ±1.5%, offset set to 0V | | | |
| Spectrum Analyzer (requires Option SA3 or SA6) | | | | |
| Spectrum Analyzer Frequency Range (Optional) | 1Hz–3GHz (Opt. SA3), 1kHz–6GHz (Opt. SA6) | | | |
| Ultra-wide Capture Bandwidth | ≥1 GHz | | | |
| Span | 1kHz–3/6GHz (1-2-5 sequence) | | | |
| Resolution Bandwidth Range | 10Hz–200MHz (Adjusted in a 1-2-3-5 sequence) | | | |
| Displayed Average Noise Level (DANL) | 400 MHz - 3 GHz: < -157 dBm/Hz (< -160 dBm/Hz, with TPA-N-PRE preamp attached) | | | |
| Phase Noise at 1 GHz CW | 1 MHz: < -120 dBc/Hz, < -123 dBc/Hz (typical) | | | |

Note: Standard model is discontinued, only S3 / S6 model is on sale

Accessories: One passive voltage probe per analog channel (200 / 350 / 500MHz model: TPP0500B (500MHz, 10: 1, 3.9pF), 1GHz model: TPP1000 (1GHz, 10: 1, 3.9pF), front Cover (part number: 200-5130-xx), installation and safety manual (part number: 071-3448-xx), calibration certificate (English), power cable, accessory bag (part number: 016-2030-xx)
[MDO4MSO option Accessories]: P6616 16-channel digital probe x 1, logic probe accessory kit (part number: 020-2662-xx) [SA3 or SA6 optional accessories] N-BNC adapter (part number: 103-0045-xx)

| | |
|---|--|
| Logic Analyzer (requires Option MDO4MSO) | |
| Digital channel | 16ch (One P6616 16-channel logic probe) |
| Maximum sample rate (Main) | 500 MS/s (2 ns resolution) |
| Maximum sample rate (MagniVu) | 16.5 GS/s (60.6 ps resolution) |
| Input channels | 16 digital (D15 to D0) |
| Thresholds | Threshold per channel |
| Arbitrary Function Generator (requires Option MDO4AFG) | |
| AFG | (13 predefined waveforms and arbitrary waveform generation) |
| AFG Waveforms | Sine, Square, Pulse, Ramp / Triangle, DC, Noise, Sin(x)/x (Sinc), Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine, Cardiac, and Arbitrary. |
| AFG Frequency Range | 50MHz (Sine), 25MHz (Square / Pulse), 5MHz (Gaussian, Lorentz, Exponential Rise / Decay, Haversine, and Arbitrary), 2MHz (Sin(x)/x), 500kHz (Ramp / Triangle, Cardiac) |
| Amplitude range | 10mV–2.5Vmax (50Ω), 20mV–5Vmax (Hi-Z) |
| Arbitrary Memory depth | 2–128k |
| Arbitrary Sample rate | 250MS/s |
| Digital Voltmeter and Frequency Counter (Available free of charge when the product is registered on the web) | |
| Voltage Measurement | Digital Voltmeter Resolution: 4 digits, AC RMS, DC, AC+DC RMS |
| Frequency Measurement | 50MHz Frequency: 5 digits, Maximum input frequency: 150MHz |
| Frequency accuracy | ±(10 μHz/Hz + 1 count) |

Options

- Opt. MDO4AFGArbitrary function generator with 13 predefined waveforms and arbitrary waveform generation (1ch)
- Opt. MDO4MSO16 digital channels, includes P6616 digital probe and accessories
- Opt. SA3Integrated spectrum analyzer with frequency range of 9 kHz to 3 GHz
- Opt. SA6Integrated spectrum analyzer with frequency range of 9 kHz to 6 GHz
- Opt. MDO4SECEnhanced instrument security

Application Modules

- DPO4BND Application bundle module (Excludes DPO4AUTOMAX)
- MDO4TRIG Advanced RF Power Level Triggering Module (For SA option)

Recommended Accessories

- 119-4146-00Near field probe set, 100 kHz - 1 GHz
- 119-6609-00Flexible monopole antenna
- TPA-N-PRE Preamplifier, 12 dB nominal Gain, 9 kHz - 6 GHz
- TPA-N-VPI N-to-TekVPI adapter
- TPA-BNC TekVPI® to TekProbe™ BNC adapter
- TEK-USB-488 GPIB-to-USB adapter
- ACD4000B Soft transit case
- HCTEK54 Hard transit case (requires ACD4000B)
- RMD5000 Rackmount kit (351-1-95-xx - sold separately)
- TEK-DPG TekVPI Deskew pulse generator signal source
- 067-1686-02 Power measurement deskew and calibration fixture

3-year warranty

Covering all labor and parts, excluding probes and accessories



SignalVu-PC-SVE Vector Signal Analysis Software

CONNL-SVPCSignalVu-PC Live Link (Node Locked License)
(See page 54 for other options)

3 Series MDO

Mixed Domain Oscilloscope

4 Series MSO / 5 Series MSO / NEW 6 Series B MSO

Mixed Signal Oscilloscope

Next Generation Oscilloscopes

User interface designed for both touch and mouse

Integrated spectrum analysis

Powerful analysis

- Automated measurements with trend, histogram, and spectrum plots
- Optional jitter analysis
- Power measurement options

Bandwidth

- Models from 100 MHz to 10 GHz
- All models offer upgradeable bandwidth

Large touchscreen HD displays (1,920 x 1,080)

Record length

- 10 to 250 Mpoints depending on model
- Up to 12-bit vertical resolution (Up to 16 bits in HiRes mode)

Input channels

- 2 to 8 inputs depending on model

Protocol options

Serial bus trigger and analysis

- I²C/SPI
- RS-232/ UART
- CAN/ CAN FD/ LIN/ FlexRay
- USB 2.0
- Ethernet
- Audio
- Aerospace
- SENT
- SPMI
- 13C

Integrated DVM and trigger frequency counter free with product registration

Built-in Arbitrary/ Function Generator option

Not all features shown are available on all oscilloscope models.

Usability and display



Touch Interaction Done Right

These next-generation oscilloscopes feature the industry's first oscilloscope user interface truly designed for touch. The same intuitive gestures you use with your phone or tablet, work on the big HD displays and the gestures are common among the 3, 4, 5 and 6 Series.


- Control inputs, triggers and acquisitions by tapping badges in the settings bar at the bottom of the display
- Drag waveforms to adjust position or to pan
- Pinch to change horizontal or vertical scale



Stunning HD Displays

The 15.6" displays on 5 and 6 Series MSOs have 1920 x 1080 HD resolution. You can see many signals at once, along with critical readouts and plots for an extensive view of your system.

Even with their bench-friendly footprints, the 3 and 4 Series offer the largest displays in their classes, with full 1920 x 1080 HD resolution.

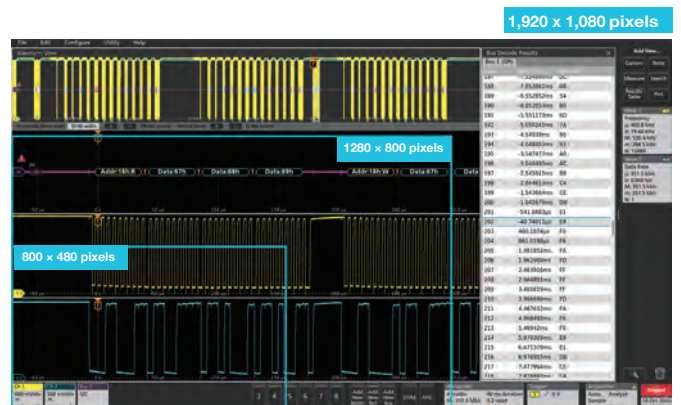

Display resolution on some competitors' products is as low as 800 x 480 pixels. That's less than 20% of the 1920 x 1080 pixel display resolution of the 3, 4, 5, and 6 Series products. Even larger 1280 x 800 pixels do not provide the same level of detail.

More Inputs and Mixed Signal Analysis

The 4, 5 and 6 Series MSOs let you see more signals by going beyond the traditional 4-channel limit, offering up to 8 analog input channels.

FlexChannel® inputs on the 4, 5, and 6 Series MSOs expand your visibility even further. Whenever you need to see more signals, just plug a TLP058 logic probe into any input. The single analog channel converts to 8 digital channels. FlexChannel inputs are backward-compatible with TekVPI probes.


The 3 Series MDO offers 16 digital channels through a dedicated logic probe, included with the MSO option.



Industry-leading Vertical Resolution

See more signal detail. The 4, 5, and 6 Series MSOs feature 12-bit analog-to-digital converters (ADCs) that provide 16 times more vertical resolution than common 8-bit ADCs.

A new High Res mode further boosts vertical resolution and uses smart filtering to limit noise. High Res mode always provides at least 12 bits and extends all the way to 16 bits of vertical resolution.

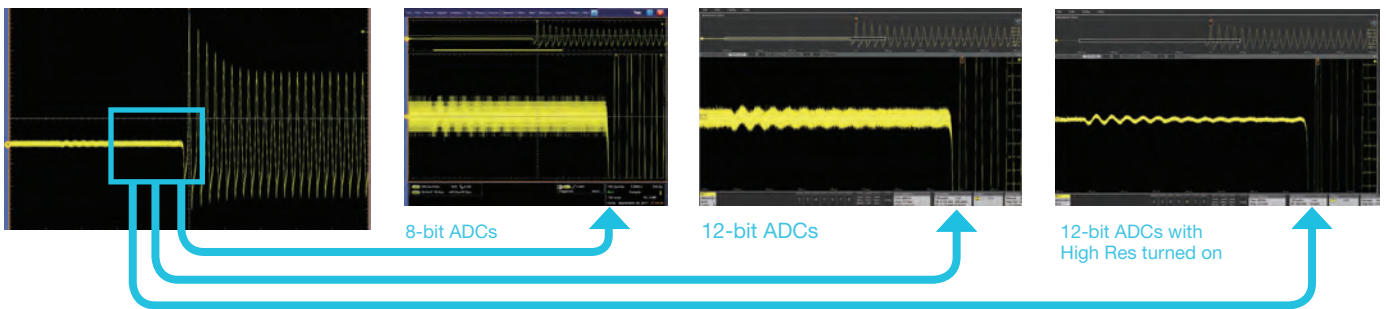


Stacked Display Mode


Most scopes display all waveforms in the same graticule and rely on vertical scale controls to fit signals on the display. Each waveform uses a fraction of the available ADC range, leading to less accurate measurements.

New stacked display mode lets you view each waveform in its own “slice” of the display. Each slice represents the full ADC range for the waveform for more accurate measurements.

The more traditional overlay display mode is also available, for easy direct comparison of waveforms.

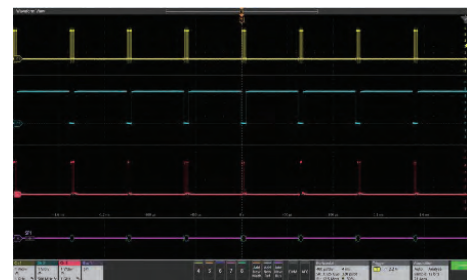

New stacked display mode

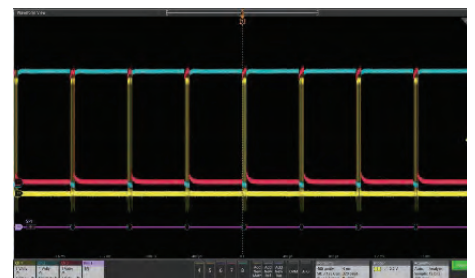


Traditional overlay display mode

Powerful Measurements

The Results Bar on the right side of the display includes immediate, one tap access to the most common analytical tools such as:

- Cursors
- Automated measurements
- Measurement statistics
- Searches
- Bus decode tables


These scopes deliver rich insights by providing easy access to measurement statistics. Turn on statistics in the Results Bar to get a quick overview.

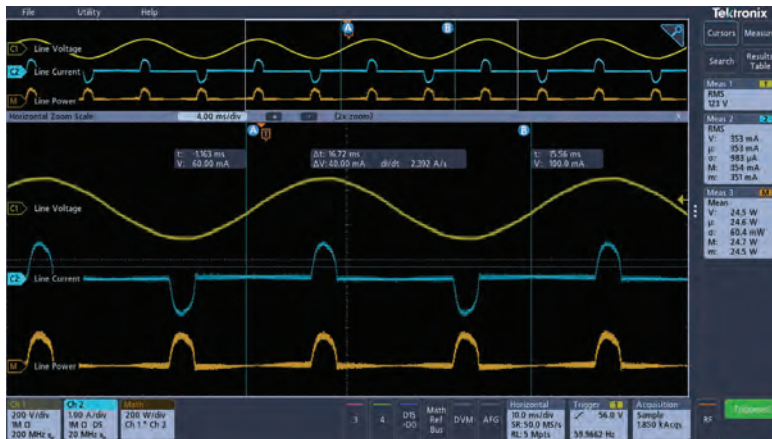

Advanced Measurements and Analysis


Dive into measurements with Results Tables. Results Tables show statistics for the current acquisition and for all acquisitions. Get insight into one measurement, a hundred measurements, or millions of measurements at a glance.

Plots, such as measurement trends and histograms, deliver quick insight.

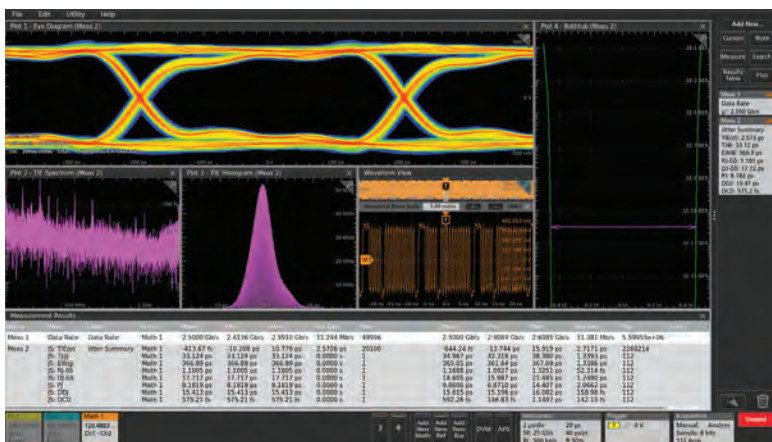

FastAcq™ High Speed Waveform Capture

FastAcq captures at high speed to increase the probability of seeing infrequent problems such as runt pulses, glitches, timing issues, and more.

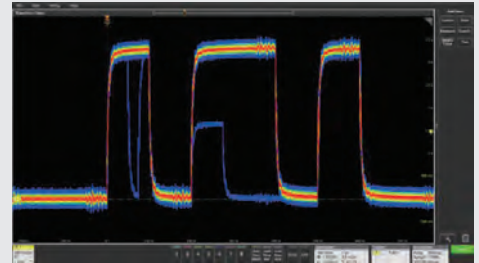

FastFrame™ Segmented Memory

Make the most efficient use of acquisition memory by not storing deadtime between serial packets or bursts. Capture many triggered frames in a single record.




Triggering and Search

A complete set of basic and advanced triggers and search criteria.

- Runt
- Logic
- Pulse width
- Timeout
- Rise / Fall time
- Setup and hold violations
- Serial and parallel bus activity
- Sequence
- Video
- Visual triggers*
- RF vs Time*
- Window*



*4, 5, 6 Series only

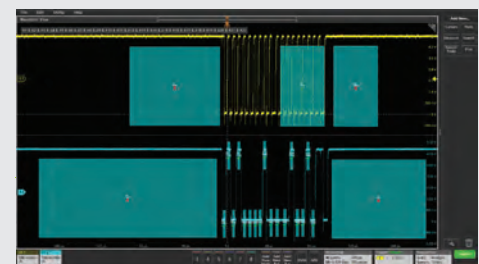


Integrated Spectrum Analysis

Spectrum View

Because traditional scope FFTs are driven by the same acquisition system that delivers the analog time-domain view, it is virtually impossible to get optimized views in both domains at once.


Spectrum View is different. It lets you independently adjust time - and frequency-domain views, by using patented technology behind each FlexChannel input. You can turn on a spectrum view for any analog channel, enabling multi-channel mixed domain analysis.

Intuitive spectrum analyzer controls like center frequency, span and resolution bandwidth (RBW) make setups easy, and RF vs time triggers make capturing anomalies straightforward.

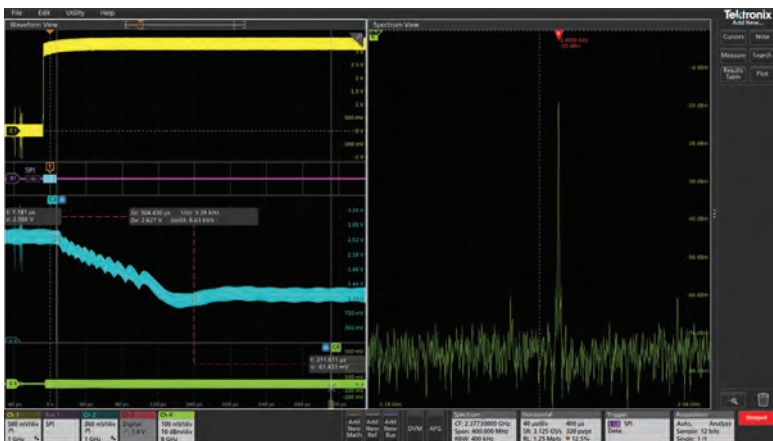

Built-in Spectrum Analyzer

The Tektronix 3 Series MDO offers an integrated, hardware-based spectrum analyzer ranging from 9 kHz to 1 GHz (standard) or 3 GHz enabling spectral analysis on IoT and most consumer wireless standards.

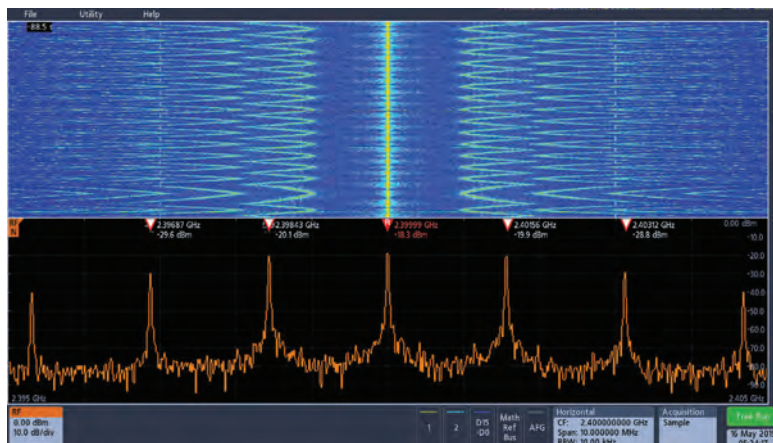


The Spectrogram display illustrates slowly moving RF phenomena. As the peaks change in both frequency and amplitude the changes are easy to see.

Built-in Arbitrary / Function Generator (AFG)

An integrated function generator is perfect for testing frequency response, simulating sensor signals, and adding noise to signals for stress testing.


- 13 standard waveform functions
- 50 MHz Sine / 25 MHz Square and Pulse
- 128k, 250 MS/s arbitrary waveforms

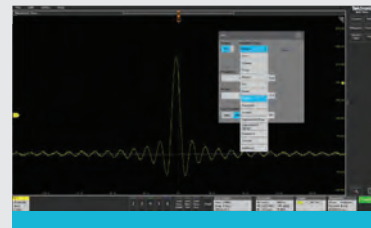

Connectivity

Every instrument includes a USB port and LXI-compliant Ethernet port for remote control. A thoroughly documented programming interface supports custom programming.

With e*Scope built-in, you can control the oscilloscope over a network through a standard web browser.

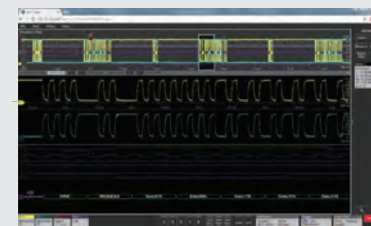

Optional Windows OS

The 5 and 6 Series MSOs offer the option of including a Microsoft Windows™ operating system. The option provides a Windows desktop where you can install and run additional applications on the oscilloscope.


Upgrading to Windows is as simple as plugging in a pre-configured SSD.



An Oscilloscope for Every Engineer





3 SERIES MDO

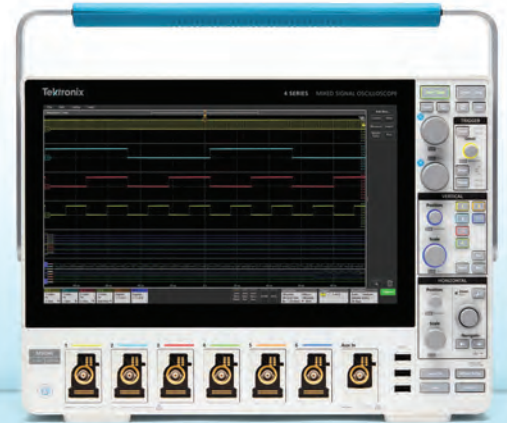

4 SERIES MSO

| | | |
|---|---|---|
| Bandwidth | 100 MHz, 200 MHz, 350 MHz, 500 MHz, 1 GHz | 200 MHz, 350 MHz, 500 MHz, 1 GHz, 1.5 GHz |
| Max channels, analog | 4 | 6 |
| Max channels, digital | 16 | 48 |
| Inputs (see page 13) | TekVPI inputs | FlexChannel inputs |
| Max sample rate | 2.5 GS/s or 5 GS/s, all channels | 6.25 GS/s, all channels |
| Record length | 10 Mpoints | Up to 62.5 Mpoints |
| Vertical resolution (see page 13) | 8 bits | 12 bits |
| Advanced analysis (optional) (see page 18) | Serial bus Power | Serial bus Power 3-Phase Power |
| Spectrum analysis (see page 15) | Hardware Spectrum Analyzer | Spectrum View |
| Operating system (see page 15) | Embedded | Embedded |
| Display (see page 12) | 11.6" HD, capacitive touch 1920 × 1080 | 13.3" HD, capacitive touch 1920 × 1080 |

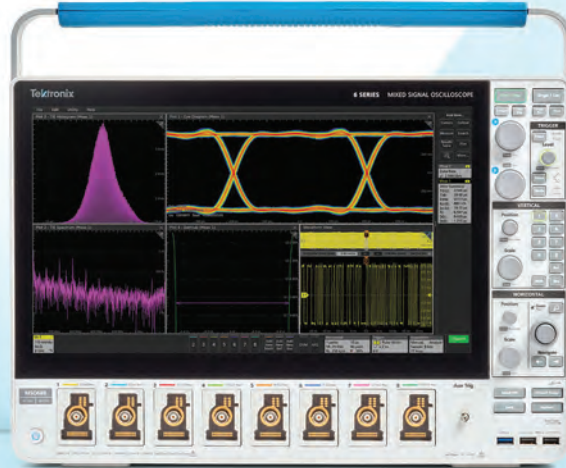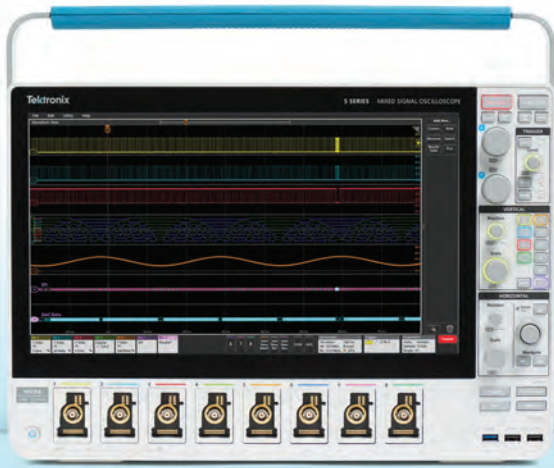

5 SERIES MSO

NEW 6 SERIES B MSO

| | | |
|---|---|---|
| 350 MHz, 500 MHz, 1 GHz, 2 GHz | 1 GHz, 2.5 GHz, 4 GHz, 6 GHz, 8 GHz, 10 GHz | Bandwidth |
| 8 | 8 | Max channels, analog |
| 64 | 64 | Max channels, digital |
| FlexChannel inputs | FlexChannel inputs | Inputs (see page 13) |
| 6.25 GS/s, all channels | 50 GS/s, 2 channels | Max sample rate |
| Up to 500 Mpoints | Up to 1 Gpoints | Record length |
| 12 bits | 12 bits | Vertical resolution (see page 13) |
| Serial bus Power Compliance Jitter Inverters, Motors and Drives | Serial bus Power Compliance Jitter Inverters, Motors and Drives DDR3 LVDS | Advanced analysis (optional) (see page 18) |
| Spectrum View | Spectrum View | Spectrum analysis (see page 15) |
| Embedded Windows (optional) | Embedded Windows (optional) | Operating system (see page 15) |
| 15.6" HD, capacitive touch 1920 × 1080 | 15.6" HD, capacitive touch 1920 × 1080 | Display (see page 12) |

Applications and Advanced Analysis.

Emphasis on Analysis.

Oscilloscope built-in features, variety of probes, and optional analysis software support a wide range of applications.


Advanced Power Measurement and Analysis

4 5 6




Make reliable and repeatable power measurements such as power quality, harmonics, safe operating area and switching loss.

4 5 6

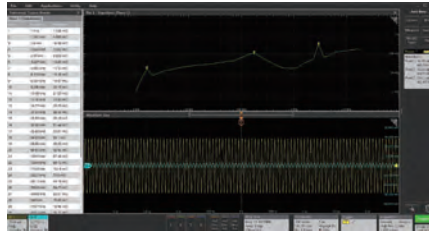


Frequency Response Analysis (FRA) to evaluate the stability of your power converters

5 6

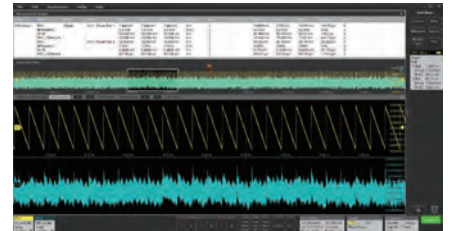

Perform ripple analysis and power sequencing measurements on multiple power rails simultaneously


3-Phase Inverter Motor Drive Analysis



5 6

Measurements and analysis on three-phase power system and industrial motors drive systems for AC induction motors, permanent magnet synchronous motors (PMSM), and brushless DC (BLDC) motors.


Advanced Jitter and Eye Diagram Analysis

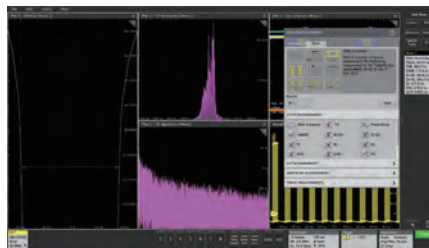

5 6

Comprehensive jitter and eye-diagram analysis and jitter decomposition algorithms enable the discovery of signal integrity issues

DDR3 / LPDDR3 Analysis

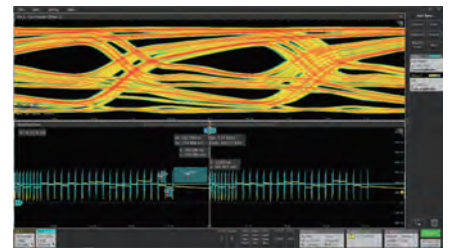


6

Automated compliance test solution and debugging analysis tool for DDR3 and LPDDR3


Automated Serial Bus Compliance Testing

5 6

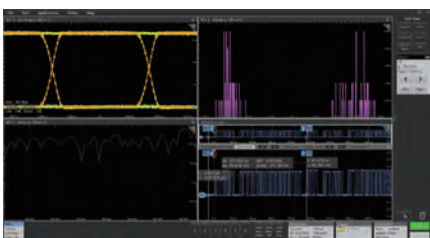

USB2.0 compliance test and debugging solution with Advanced Jitter and Eye Diagram Analysis

5 6

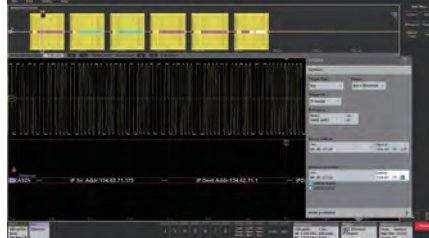

Supports Ethernet automated compliance test solution (10BASE-T / 100BASE-T / 1000BASE-T)

5 6




Supports Automotive Ethernet automated compliance test solution (100Base-T1, 1000Base-T1) as well as Signal Separation and PAM3 analysis

6




MIPI D-PHY 2.1 Tx automated conformance test solution and DSI-1, CSI-2 serial bus decoding

5 6



Automated debug and analysis on LVDS

6

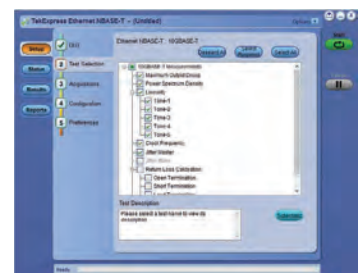

Automated compliance test solution for 10GBASE-T, NBASE-T (2.5GBASE-T and 5GBASE-T)

Models and Instrument Options

For complete ordering details see the product datasheet or contact your local sales representative.

| Base Models | 3 Series MDO | 4 Series MSO | 5 Series MSO | 6 Series MSO |
|------------------------------|--|---|---|---|
| 2 TekVPI Channels | MDO32 | | | |
| 4 TekVPI Channels | MDO34 | | | |
| 4 FlexChannel Inputs | | MSO44 | MSO54 | MSO64B |
| 6 FlexChannel Inputs | | MSO46 | MSO56 | MSO66B |
| 8 FlexChannel Inputs | | | MSO58 | MSO68B |
| Bandwidth | 100 MHz, 200 MHz, 350 MHz, 500MHz, 1 GHz | 200 MHz, 350 MHz, 500 MHz, 1 GHz, 1.5 GHz | 350 MHz, 500 MHz, 1 GHz, 2 GHz | 1 GHz, 2.5 GHz, 4 GHz, 6 GHz, 8GHz, 10GHz |
| Digital Channels | • | <i>simply order TLP058 probes to enable 8 digital signals per probe</i> | | |
| Arbitrary Function Generator | • | • | • | • |
| Spectrum Analyzer | 1 GHz (std.), 3 GHz | <i>see Spectrum View analysis below</i> | | |
| Extend Record Length | (10 M standard) | 62.5 M/ch max (31.25 M standard) | 125 M/ch max 250 M/ch max 500 M/ch max (62.5 M standard) | 125 M/ch max 250 M/ch max 500 M/ch max 1 G/ch max (up to 4 ch) (62.5 M standard) |
| Service Options | 3 Series MDO | 4 Series MSO | 5 Series MSO | 6 Series MSO |
| Calibration service | 3 years 5 years | 3 years 5 years | 3 years 5 years | 3 years 5 years |
| Standard warranty extension | 5 years | 5 years | 5 years | 3 years 5 years |
| Total product protection | 3 years 5 years | 3 years 5 years | 3 years 5 years | 3 years 5 years |

To learn more about our service options visit: <https://www.tek.com/choose-service-plan>


Application Software Bundles

Application Software Bundles combine multiple measurement and analysis options for much less than the cost of individual options. They can be a great value, especially if you have a diverse workload.

4 5 6

Find out more in [Solution Bundles for 4, 5 and 6 Series MSOs](#)

Individual software options are listed on the next page.

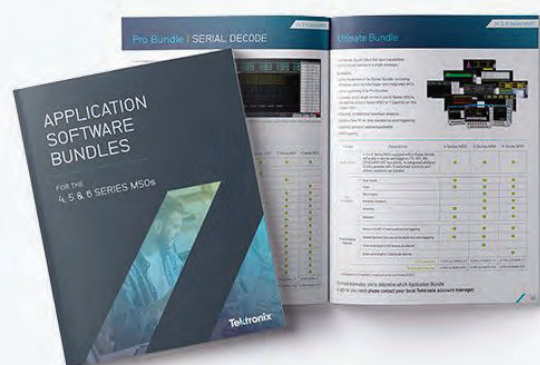

Serial Bus Decoding, Compliance / Conformance Testing and Advanced Analysis


Listing of individual software options

| | Options | 3 Series MDO | 4 Series MSO | 5 Series MSO | 6 Series B MSO |
|---|---|--------------|--------------|--------------|----------------|
| Serial Decode Options | 1-Wire serial decoding and analysis | | • | • | • |
| | 8b10b serial decoding and analysis | | | • | • |
| | Aerospace serial trig. and analysis (MIL-STD-1553, ARINC429) | • | • | • | • |
| | Audio serial trig. and analysis (I2S, LJ, RJ, TDM) | • | • | • | • |
| | Automotive serial trig. and analysis (CAN, CAN FD, LIN, FlexRay) | • | • | • | • |
| | Automotive sensor serial triggering and analysis (SENT) | | • | • | • |
| | Computer serial triggering and analysis (RS-232/422/485/UART) | • | • | • | • |
| | CXPI decoding and analysis | | • | • | • |
| | Embedded serial triggering and analysis (I ² C, SPI) | • | • | • | • |
| | SpaceWire serial decoding and analysis | | • | • | • |
| | eSPI decoding and analysis | | • | • | • |
| | eUSB2 serial decoding and analysis | | • | • | • |
| | Manchester decoding and analysis | | • | • | • |
| | MIPI D-PHY (CSI/DSI) decoding and analysis | | | • | • |
| | NRZ decoding and analysis | | • | • | • |
| | PSI5 serial decoding and analysis | | • | • | • |
| | SLDC serial decoding and analysis | | • | • | • |
| | SVID serial decoding and analysis | | • | • | • |
| | MDIO serial decoding and analysis | | • | • | • |
| | Ethernet serial triggering and analysis (10BASE-T, 100BASE-TX) | | • | • | • |
| I3C serial decoding and analysis | | • | • | • | |
| Power management serial triggering and analysis (SPMI) | | • | • | • | |
| USB serial triggering and analysis (USB 2.0 LS, FS, HS) | • | • | • | • | |
| Compliance Options | Automotive Ethernet (10BASE-T1S) compliance solution | | | | • |
| | Automotive Ethernet (100BASE-T1, 1000BASE-T1, 10BASE-T1S) automated compliance test application | | | • | • |
| | DDR3 and LPDDR3 automated compliance solution | | | | • |
| | Ethernet (2.5G and 5G BASE-T) automated compliance solution | | | | • |
| | Ethernet (10G BASE-T) automated compliance solution | | | | • |
| | Ethernet (1000BASE-T, 100BASE-T, 10BASE-T, 10Base-T1L) automated compliance solution | | | • | • |
| | MIPI D-PHY 1.2 automated compliance solution | | | | • |
| | MIPI C-PHY 2.0 automated compliance solution | | | | • |
| | MIPI D-PHY 2.1 automated compliance solution | | | | • |
| | Multi-Gigabit Automotive Ethernet (2.5G/5GBASE-T1) automated compliance solution | | | | • |
| USB2.0 automated compliance test solution | | | • | • | |
| Analysis Options | 3-phase, inverter, motor, drive analysis | | | • | • |
| | 3-phase power measurements and analysis | | • | | |
| | Advanced jitter and eye analysis | | | • | • |
| | Advanced power measurement and analysis | | • | • | • |
| | Basic power measurements and analysis | • | • | | |
| | DDR3 and LPDDR3 analysis and debug | | | | • |
| | DQ0 measurements for inverter motor drives | | | • | • |
| | Enhanced security for instrument declassification | • | • | • | • |
| | Removable SSD with Windows license | | | • | • |
| | User-defined filter creation tool | | | • | • |
| Vector signal analysis (SignalVu-PC) | | | • | • | |

NEW Application Bundles

Money Saving Bundles for the 4, 5 and 6 Series MSOs

- Offer better value with more functions at a much lower cost than equivalent individual options
- Make it cost-effective to purchase capabilities to cover future needs or needs across engineering teams
- Include the most frequently combined options for key applications and industries
- Provide flexibility to adjust year-to-year with lower cost 1-year subscriptions

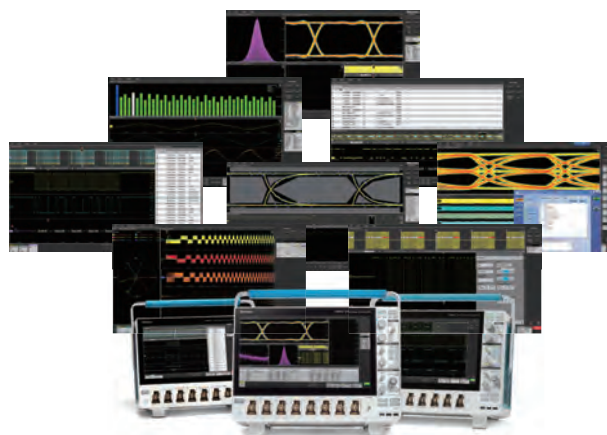

Starter Bundle

These bundles add capabilities that almost all engineers need for embedded systems design.

4, 5 or 6 Series MSOs equipped with a Starter Bundle (for example, 4-STARTER-PER) will be able to decode and trigger on I²C, SPI, RS-232 / 422 / 485 / UART bus activity. Includes an integrated arbitrary/function generator with 13 predefined functions and arbitrary waveforms. This is equivalent to adding -AFG, -SRCOMP and -SREMBD options.

Pro Bundles

Specially designed to empower engineers in particular applications and industries.

Any Pro Bundle includes the capabilities enabled with the **Starter Bundle** + **Extended record length** to help you take better advantage of advanced analysis capabilities.

| Serial Decode (4, 5, 6 Series) | Power (4, 5, 6 Series) | Signal Integrity (5, 6 Series) | Standards Compliance (5, 6 Series) | Automotive (4, 5, 6 Series) | Aerospace (4, 5, 6 Series) |
|---|---|--|---|---|--|
| A comprehensive kit of serial protocol support for embedded systems. Eliminates the need to decode by hand. | Automates a wide range of power measurements – from the AC line to point of load. | Essential tools for engineers analyzing jitter and signal integrity of high-speed clocks and data lines. | Comprehensive test automation with full instrument control and reporting for testing to the leading serial standards. | For ECU designers – decoding for automotive protocols, and automated compliance testing for key communications standards. | Serial bus decoding for key aerospace protocols and mask testing for testing unique signals. |

Ultimate Bundle

Everything listed above for the most capabilities and highest savings.

All of the capabilities of the **Starter Bundle** + All capabilities of **ALL Pro Bundles**.

Spectrum View RF vs. time waveforms + Extended Spectrum View capture bandwidth.

Video triggering.

Maximum available record length for the 5 and 6 Series MSOs.

| Software Bundle Options | 4 Series MSO | 5 Series MSO | 6 Series B MSO |
|--|------------------|------------------|------------------|
| Starter Bundle: 1 YR Licenses | 4-STARTER-1Y | 5-STARTER-1Y | 6-STARTER-1Y |
| Starter Bundle: Perpetual Licenses | 4-STARTER-PER | 5-STARTER-PER | 6-STARTER-PER |
| Pro Bundle: Serial Decode - 1 YR Licenses | 4-PRO-SERIAL-1Y | 5-PRO-SERIAL-1Y | 6-PRO-SERIAL-1Y |
| Pro Bundle: Serial Decode - Perpetual Licenses | 4-PRO-SERIAL-PER | 5-PRO-SERIAL-PER | 6-PRO-SERIAL-PER |
| Pro Bundle: Power - 1 YR Licenses | 4-PRO-POWER-1Y | 5-PRO-POWER-1Y | 6-PRO-POWER-1Y |
| Pro Bundle: Power - Perpetual Licenses | 4-PRO-POWER-PER | 5-PRO-POWER-PER | 6-PRO-POWER-PER |
| Pro Bundle: Signal Integrity - 1 YR Licenses | - | 5-PRO-SIGNAL-1Y | 6-PRO-SIGNAL-1Y |
| Pro Bundle: Signal Integrity - Perpetual Licenses | - | 5-PRO-SIGNAL-PER | 6-PRO-SIGNAL-PER |
| Pro Bundle: Standards Compliance - 1 YR Licenses | - | 5-PRO-COMPL-1Y | 6-PRO-COMPL-1Y |
| Pro Bundle: Standards Compliance - Perpetual Licenses | - | 5-PRO-COMPL-PER | 6-PRO-COMPL-PER |
| Pro Bundle: Automotive - 1 YR Licenses | 4-PRO-AUTO-1Y | 5-PRO-AUTO-1Y | 6-PRO-AUTO-1Y |
| Pro Bundle: Automotive - Perpetual Licenses | 4-PRO-AUTO-PER | 5-PRO-AUTO-PER | 6-PRO-AUTO-PER |
| Pro Bundle: Aerospace - 1 YR Licenses | 4-PRO-MILGOV-1Y | 5-PRO-MILGOV-1Y | 6-PRO-MILGOV-1Y |
| Pro Bundle: Aerospace - Perpetual Licenses | 4-PRO-MILGOV-PER | 5-PRO-MILGOV-PER | 6-PRO-MILGOV-PER |
| Ultimate Bundle: 1 YR Licenses | 4-ULTIMATE-1Y | 5-ULTIMATE-1Y | 6-ULTIMATE-1Y |
| Ultimate Bundle: Perpetual Licenses | 4-ULTIMATE-PER | 5-ULTIMATE-PER | 6-ULTIMATE-PER |

LPD64

6 Series Low Profile Digitizer

High Speed Digitizers



LPD64

MSO58LP

5 Series MSO Low Profile



MSO58LP

- Channels: 8ch / 4ch in a compact 2U "rack ready" form factor
- Bandwidth: 8 GHz, 25 GS/s sample rate
- Vertical Resolution: 12-bit ADC
- Multi-Channel Synchronize & Remote Control
- Up to 2 GHz RF DDC bandwidth on all channels




High Performance Specifications on ALL channels



Use the benchtop 5/6 Series MSO with its 15.6-inch HD display and pinch-swipe-zoom touchscreen for design validation. Eliminate work by using exactly the same software and test routines in production that you developed during design.

Easy Programmatic Integration with Fast Data Transfers

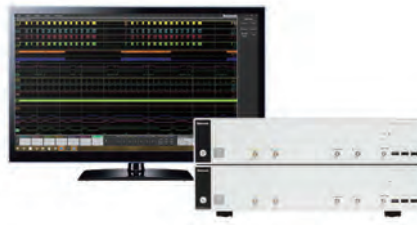

Synchronize multiple high-speed digitizers into a single virtual instrument. Discover, search and analyze across more channels than ever before.

Multi-Channel Synchronize & Remote Control




8 input channels in a space-saving 2U high package. Fit 6x more channels into your existing rack space.

| | MSO58LP | LPD64 |
|-------------------------------|--|---|
| Bandwidth | 1GHz | 1 GHz, 2.5 GHz, 4 GHz, 6 GHz, 8 GHz |
| Analog Channels | 8 | 4 |
| Digital Channels (MSO) | Up to 64 (TLP058x8) | - |
| ADC Resolution | 12 bits | 12 bits |
| Analog Sample Rate | 6.25 GS/s (on all channels) | 25 GS/s (on all channels) |
| Standard Record Length | 125 Mpts, up to 500 Mpts optional record length | 125 Mpts, up to 1 Gpts optional record length |
| Input impedance | 50Ω/1MΩ | 50Ω |
| Input range | 50Ω : 500 μV/div~1V/div 1MΩ : 500 μV/div~10 V/div | 50Ω : 1mV/div~1V/div |
| Effective bits (1 GHz) | 7.6 | 8.2 |
| Input Connectors | FlexChannel | SMA |
| Dimensions and Weight | 87.3 (H) × 432 (W) × 605.7 (D) mm, 12.7kg | 87.3 (H) × 432 (W) × 605.7 (D) mm, 13.34kg |

NEW TekScope

PC Waveform Analysis Software

Get the analysis capability of our award-winning oscilloscopes right on your PC. Analyze waveforms anywhere, anytime. The starter license lets you view and analyze waveforms, perform measurements, and decode I2C, SPI, and RS-232. It also supports remote communication with a range of Tektronix oscilloscopes. Pro and Ultimate licenses add advanced capabilities such as additional serial bus decoding, jitter analysis, power analysis, and multi-scope analysis.

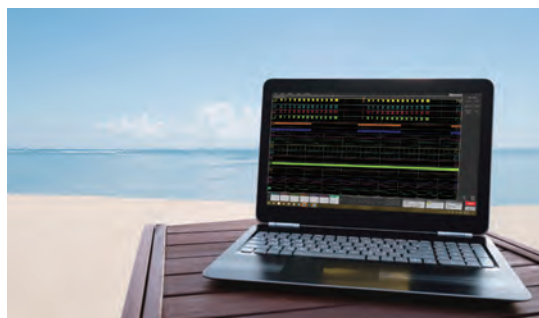


Greater Productivity and Convenience




- Analyze data at your desk, at home, or on the road
- Nothing to learn. It operates just like your oscilloscope
- Analyze waveform data from most oscilloscopes on your PC
- Remotely access your oscilloscope to view, acquire and analyze waveforms. TekScope is compatible with all of the latest Tektronix oscilloscope models

Add Analysis Capabilities

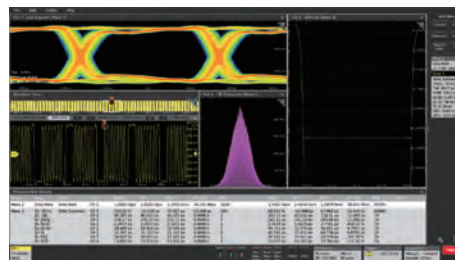

- Utilizes the award-winning 4/5/6 Series MSO user interface
- Augment on-scope capabilities with additional capabilities like bus decoding, jitter analysis, and power measurements
- Flexible licensing makes it easier to add the analysis functions you need, when you need them

Synch Waveforms from Multiple Scopes

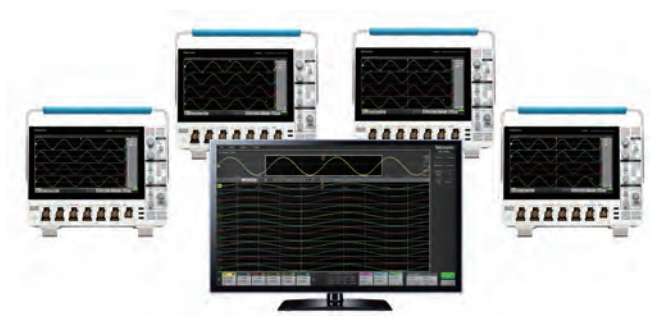

Pan, zoom, rearrange and make measurements on signals acquired on up to four different oscilloscopes

Analyze Collaboratively



Easily share waveform datasets. Colleagues can rescale waveforms and take measurements as if they were sitting in front of the oscilloscope. In addition, TekDrive natively enables cloud saving, sharing, and analysis

| Product | Description | Opt. |
|--|---|------------------|
| TekScope PC Waveform Analysis Software - Base License | Waveforms viewing and analysis, standard measurements, basic and advanced math options, basic and advanced plot options, wide range of file formats, FastFrame of segmented memory, multi-language support | - |
| Multi-Scope Analysis | License; Multi-Scope Analysis License, Viewing and Analysis of Real-time Channels from Multiple Remote Scopes Simultaneously; 2 Individual Seats, Node Locked. | TEKSCOPE-MULTI |
| Jitter Measurements and Analysis | License; Advanced Jitter and Eye Analysis | TEKSCOPE-DJA |
| Remote Analysis for Bench Oscilloscopes | Remote Analysis for Bench Oscilloscopes | TEKSCOPE-ENTRY |
| Low Speed Protocol Decode | License; Low Speed Protocol Decode - I2C, I3C, SPI, RS-232, SPMI, I2S, LJ, RJ, TDM, CAN, CAN-FD, LIN, FlexRay, SENT, 100BASE-T1 Automotive Ethernet, MIL-STD-1553, ARINC-429, SpaceWire, USB 2.0, eUSB2, PS/5, SVID, 10BASE-T / 100BASE-TX Ethernet, MDIO, NRZ, 8b/10b, MIPI D-PHY, Manchester, SDLC, 1-Wire, MIPI C-PHY CSI/DSI; | TEKSCOPE-DECODE |
| Power Electronics Analysis | License; Power Electronics: Advanced Power Analysis, Magnetics Analysis, Inverter Motor Drive Analysis | TEKSCOPE-PWR-ELC |
| Power Integrity Analysis | License; Power Integrity: Digital Power Management and Analysis, Power Management Serial Decode and Analysis (SPMI) | TEKSCOPE-PWR-INT |
| SpectrumView Analysis | License; SpectrumView Application | TEKSCOPE-SV |

OS: 64-bit Windows 10

NEW TekDrive


Collaborative Data Workspace

Remotely share test and measurement data

- Secure anywhere-access to team's Data
- Inspect, analyze, and report on any device
- Save and recall directly on an oscilloscope:
- Easy and secure TekDrive mount system
- Seamless collaboration with unlimited contributors
- Splice into any workflow



Securely Access Data from Anywhere

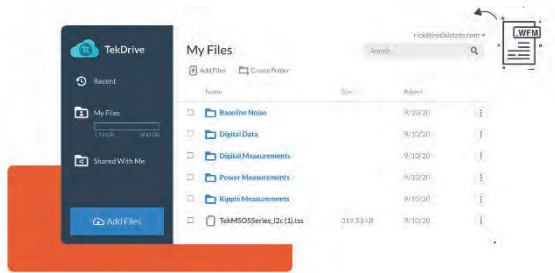

TekDrive features a secure and sophisticated infrastructure to ensure the confidentiality, integrity, and availability of your data

Save and Recall Directly on Instruments



Once TekDrive is mounted on an oscilloscope or other supported instrument, engineers can interact with files, folders, data in the same manner as any other drive – except backed by the power of instant sharing and seamless accessibility.

Inspect, Analyze, and Report on any Device



Standard file types generated by Tektronix Oscilloscopes (*.tss, *.wfm, *.isf, *.csv) can be opened and inspected directly in the TekDrive interface with no loss of data integrity.

Splice into any Workflow


```

#-----Create File Record-----
def createFileRecord():
    data = { "name": fileName + ".csv", "parentFolderId"
    url = requests.post(apiUrl + "/file", json=data,
    return(url)

#-----Upload File Using uploadURL from File Record-----
def uploadFile(upload):
    file = open(fileName + ".csv", 'rb')
    requests.put(upload, data = file, headers = headers)
    return
    
```

TekDrive is designed to be accessible and developer-friendly for integration, scripting, and automation. Provide approachable starting points with pre-built examples and SDKs for popular languages, like Python, LabVIEW, MATLAB and more.

Seamless Collaboration with Unlimited Contributors

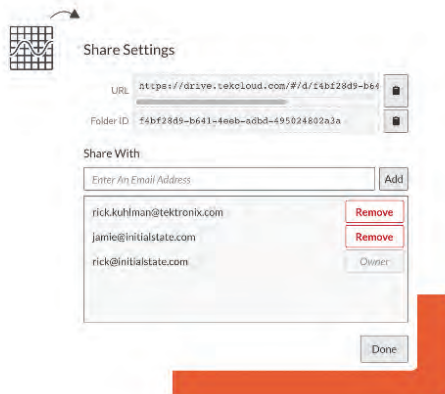

Using a tier that allows sharing, you may have unlimited contributors collaborating with shared data.

| TekDrive Service Tier | | Contents |
|-----------------------|---------------------|---|
| TEKDRIVE-IND | TekDrive Individual | 200 GB Hosted storage |
| | | Contribute - may not initiate or manage sharing |
| | | In-Browser analysis |
| | | 2 Access keys |
| TEKDRIVE-BUS | TekDrive Business | 600 GB Hosted storage |
| | | Unlimited sharing |
| | | In-Browser analysis |
| | | 10 Access keys |
| TEKDRIVE-ENT | TekDrive Enterprise | 2TB GB Hosted storage |
| | | Unlimited sharing |
| | | In-Browser analysis |
| | | 100 Access keys |

MSO / DP070000 / DX Series

Digital and Mixed Signal Oscilloscopes

See a World that Others Don't



Features

- 4 to 33 GHz true analog bandwidth for measurements on the latest high-speed serial standards
- Sample Rate: 100 GS/s on 2 Channels / 50 GS/s on 4 Channels
- 4-channel Simultaneous Performance - Up to 23 GHz Bandwidth
- Industry's lowest vertical noise
- FastAcq® captures signals at more than 300,000 waveforms per second
- Industry's only 6.25 Gb/sec Hardware Serial Trigger with Built-in Bit Error Detection
- TriMode™ probing system, highest bandwidth of up to 33GHz
- Leader in performance MSO: 33 GHz bandwidth, 16 digital channels with 80 ps Tme resolution

Technology that Paces the Industry

Utilizes the reliable, fast SiGe 8HP BiCMOS Process from IBM


- 33GHz and 100GS/s performance packed in a single multi-chip module
- Reduced part count and higher reliability through integration
- 8 way interleaved track and hold achieves significantly lower spurs, low noise to 100GS/s
- Dedicated, newly designed heat dissipation technology provides high cooling capacity for long-term reliability



Capture and Isolate Complex Signal with Pinpoint® Trigger

More than 1400 trigger combinations

- Allow selection of virtually all trigger types on both A and B trigger events delivering the full suite of advanced trigger types for finding sequential trigger events
- Provide trigger reset capabilities that begin the trigger sequence again after a specified time, state, or transition so that even events in the most complex signals can be captured

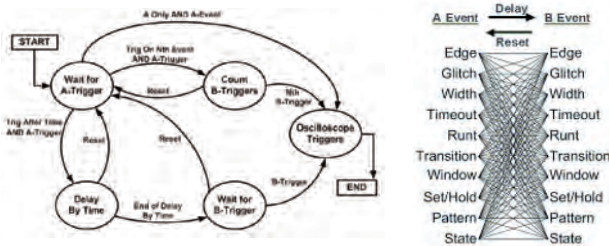


Mixed Signal Oscilloscope (MSO70000 Series)

The MSO70000 Series is equipped with a 12.5 GS/s, 16-channel digital input in addition to analog with a maximum frequency band of 33 GHz. The MSO has unique capabilities combined with exceptional signal acquisition performance and analysis accelerate your measurement tasks.

iCapture® - One Connection for Analog and Digital

Using the iCapture digital-to-analog multiplexer feature, you can easily verify the analog characteristics of any of the 16 signals connected to the MSO70000 Series digital channels without changing probes or connections.

16 logic channels: Up to 2.5 GHz

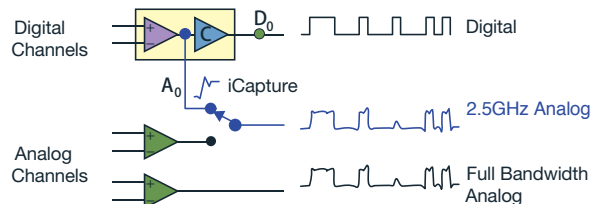


Visual Trigger – Find the Signal of Interest Quickly

- Precisely qualify triggers and find unique events in complex waveforms



Example: Triggering for DDR signal

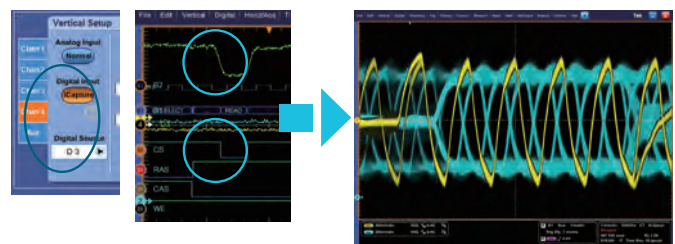

Example: Using iCapture function to observe the analog terminals connected to digital channels

4GHz - 33GHz Trimode Differential Probes

With TriMode probing, one probe setup makes differential, single ended, and common mode measurements accurately.

1 Differential 2 Single Ended 3 Common Mode



P7500 Series

P7600 Series

| Probe Model | P7633 | | P7625 | |
|------------------------------|-----------|-----------|-----------|-----------|
| Adapter | P76CA-xxx | P76TA | P76CA-xxx | P76TA |
| Characteristic | (Typical) | (Typical) | (Typical) | (Typical) |
| Bandwidth (typical) | 33GHz | 30GHz | 25GHz | |
| Rise time (10-90%) (typical) | 14ps | 16ps | 18ps | |
| Rise time (20-80%) (typical) | 11ps | 12ps | 14ps | |
| Offset voltage range | ±4V | | | |

P7500 Series

| TriMode Probe Architecture | P7504 | P7506 | P7508 | P7513A | P7516 | P7520A |
|---------------------------------|-------------------------------|-------|-------|--------|--------------------------------|---|
| Bandwidth (Probe only) | 4GHz | 6GHz | 8GHz | 13GHz | 16GHz | 20GHz ¹ / 25GHz ² |
| Rise time (10-90%) (Probe only) | 105ps | 75ps | 55ps | 40ps | 32ps | 27ps ¹ |
| Rise time (20-80%) (probe only) | 70ps | 50ps | 35ps | 28ps | 24ps | 18ps ¹ |
| Differential input range | ±0.75V (5X) ±1.75V (12.5X) | | | | ±0.625V (5X) ±1.60V (12.5X) | |

¹A-B mode ² Using a P7520A probe for up to 25 GHz with DSP and a P75PST solder tip

| Basic Specification | MSO70804C DPO70804C | MSO71254C DPO71254C | MSO71604C DPO71604C | MSO72004C DPO72004C | MSO72304DX DPO72304DX | MSO72504DX DPO72504DX | MSO73304DX DPO73304DX |
|--|--|------------------------|------------------------|------------------------|---|----------------------------|----------------------------|
| Vertical system - Analog channels | | | | | | | |
| Analog bandwidth (user-selectable DSP enhance) (-3 dB) | 8GHz | 12.5GHz | 16GHz | 20GHz | 23GHz (2ch) 23GHz (4ch) | 25GHz (2ch) 23GHz (4ch) | 33GHz (2ch) 23GHz (4ch) |
| Hardware Analog Bandwidth (-3 dB) | 8GHz | 12.5GHz | 16GHz (Typical) | 16GHz (Typical) | 23GHz | 25GHz | 33GHz |
| Analog channels | 6 | | | | | | |
| Digital channels (MSO70000 Series only) | 16 | | | | | | |
| Rise time (10% to 90%, typical) | 49ps | 32ps | 24.5ps | 18ps | 17ps | 16ps | 13ps |
| Input sensitivity range | | | | | | | |
| Below 18 GHz | 10 mV/div to 500 mV/div (100 mV to 5 V full scale) | | | | - | | |
| 20 GHz, 19 GHz | 20 to 500 mV/div (200 mV to 5 V full scale) | | | | - | | |
| 23 GHz, 25 GHz, 33 GHz | - | | | | 6.25 mV/div to 600 mV/div (62.5 mV to 6 V full scale) | | |
| Maximum input voltage, 50 Ω | <5.0 VRMS for ≥100 mV/div; 1.0 VRMS for <100 mV/div | | | | ≤1.2 VFS: ±1.5 V relative to the termination bias (30 mA maximum), ±5 V absolute maximum input, >1.2 VFS: 8.0 V | | |
| Offset range | 10mV/div: ±450mV, 20mV/div: ±400mV, 50mV/div: ±250mV, 100mV/div: ±2.0V, 200mV/div: ±1.5V, 500mV/div: ±0.0V | | | | ±3.4V | | |
| Termination voltage range | - | | | | ≤1.2 VFS: -3.5 V to +3.5 V, >1.2 VFS: 0 V | | |
| Position range | ±5div | | | | | | |
| Vertical resolution | 8 bit (11 bit with averaging) | | | | | | |
| Horizontal System | | | | | | | |
| Time base range | 20ps/div-1000s/div | | 10ps/div-1000s/div | | | | |
| Timing resolution (ET / IT mode) | 200fs | | 100fs | | | | |
| Channel-to-Channel deskew range | ±75 ns | | | | | | |
| Delta time measurement accuracy (RMS over <100 ns Duration; Single Shot; Signal Rise Time = 1.2 x Scope Rise Time; 100 mV/div, bandwidth filter on, max sample rate) | 1.24ps | 1.23ps | 1.15ps | 1.43ps | 639fs | 639fs | 555fs |
| Jitter noise floor (with BWE enabled) (typical) | 300fs | 270fs | 270fs | 290fs | < 380 fs | < 365 fs | < 325 fs |
| Time base accuracy | ±1.5 ppm initial accuracy, aging <1 ppm per year | | | | | | |
| Time base delay time range | -5.0ks-1.0ks | | | | | | |
| Trigger jitter | <100 fsRMS (1 psRMS [typical] with enhanced triggering off) | | | | | | |
| Acquisition System | | | | | | | |
| Sample rate | | | | | | | |
| Sample rate (1, 2 ch) | 25GS/s | | | 100GS/s | | | |
| Sample rate (3, 4 ch) | 25GS/s | | | 50GS/s | | | |
| Sample rate (ET/IT mode) | 5TS/s | | | 10TS/s | | | |
| Record length | | | | | | | |
| Record length, points (each channel, standard) | DPO70000 Series : 31.25M MSO70000 Series : 62.5M | | | | | | |
| Opt. 5XL | DPO70000 Series: 62.5M/Standard for MSO70000 Series | | | | | | |
| Opt. 10XL (each channel) | 125 M | | | | | | |
| Opt. 20XL (each channel) | - / 250M / Models above 12.5 GHz | | | | | | |
| Opt. 50XL (each channel) | - / 500M 1G on 2 channels / DX Models only | | | | | | |
| Logic Channels (MSO70000 Series only) | | | | | | | |
| Logic Channels | 16 | | | | | | |
| Thresholds | One per channel, independently set | | | | | | |
| Threshold accuracy | ±75 mV + 3% of threshold setting | | | | | | |
| Threshold resolution | 5mV | | | | | | |
| Maximum sample rate (all channels) | 12.5GS/s | | | | | | |
| Timing resolution | 80ps | | | | | | |
| Physical Characteristics | | | | | | | |
| Dimensions, Weight, Power | 298 (H) x 451 (W) x 489.97 (D) mm, 24kg (Net Weight), <1100 VA typical | | | | | | |

Note: Frequency Band in real time sample: (1, 2ch) 4GHz 6GHz 8GHz 12.5GHz 16GHz 20GHz 23GHz 25GHz 33GHz (4ch) 4GHz 6GHz 8GHz 12.5GHz 16GHz 20GHz 23GHz 23GHz
Frequency band in equivalent time sample: (4ch) 4GHz 6GHz 8GHz 12.5GHz 16GHz 20GHz 23GHz 25GHz 33GHz

Ships with product: User Manual (071-2980-xx), 4 x TCA-292MM TekConnect® to 2.92 mm Adapter (C models), 4 x TCA-292D TekConnect® to 2.92 mm Adapter (DX models), TCA-BNC TekConnect® to BNC Adapter, Accessory Pouch, Front Cover, Mouse, Keyboard, Power Cord, Static Protection Wrist Strap, GPIB Programmer's Reference (on product SSD), Performance Verification Procedure PDF File, Cabellibration Certificate Documenting NIST Traceability, Z 540-1 Compaliance and ISO9001, P6717A General Purpose Logic Probe (MSO models), Logic Probe Deskew Fixture (MSO models), 067-2298-xx Deskew Fixture, logic probes, One-year warranty covering all parts and labor.

DPO7000SX Series

ATI Performance Oscilloscope / Digital Phosphor Oscilloscope
 Lowest Noise. Highest Fidelity. Maximum Performance.
 Flexible. Versatile. Scalable Performance



DPO77002SX 70 GHz ATI Performance Oscilloscope



DPO73304SX 33 GHz Digital Phosphor Oscilloscope

Features

- Low noise, 70 GHz real time signal capture using patented ATI architecture
- 70GHz Analog Bandwidth (1 ch), 33GHz Analog Bandwidth (2 ch)
- 200GS/s Sample Rate
- Highest trigger performance with >25 GHz Edge trigger bandwidth
- Precise, scalable performance using UltraSync multi-unit time synchronization bus
- Compact instrument package with flexibility for future expansion and simple reconfiguration

Compact Ultra-performance Oscilloscope

DPO7000SX Series models establish a unique compact oscilloscope package that enables unprecedented workspace efficiency and mounting versatility.

UltraSync Multi-unit Synchronization

DPO7000SX Series instruments include the Tektronix UltraSync multi-unit time synchronization bus. UltraSync is used to synchronize sample clock, trigger and run-stop control across multiple units. UltraSync provides outstanding integration and time alignment between units in a multi-unit stack.




UltraSync connection on instrument with Master and Extension role


The DPO7AFP Auxiliary Front Panel is a valuable usability accessory that compliments the compact instrument package by enabling users to operate with familiar controls without requiring access to the front of an instrument.



ATI (Asynchronous Time Interleaving) Technology

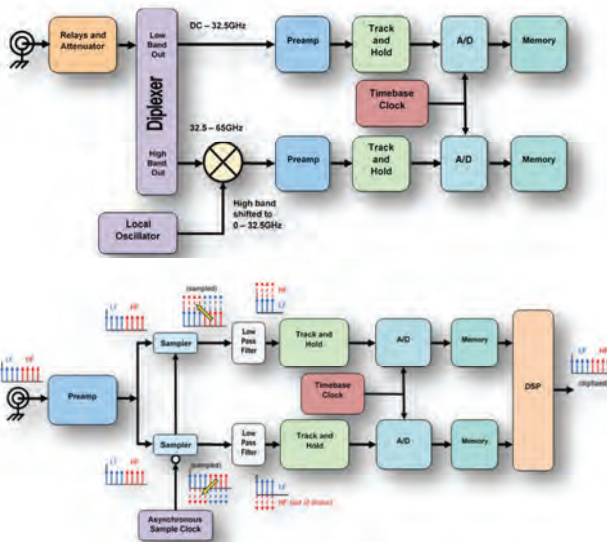

Legacy Frequency Interleaving Technique
 "Stitching" via DSP is complicated. Due to path differences, compensation must occur adding to complexity.

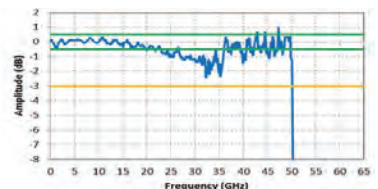

Each digitizing path operates at 100 GS/s and the folded spectrum is band limited to <40 GHz to meet Nyquist criteria. The alternating phase of the sampler has the effect of inverting signal phase 180° in one digitizing path, which provides significant benefit in reconstructing the final digitized signal.

Unlike the frequency interleaving method, Tektronix's unique ATI architecture provides a symmetric technique that delivers all signal energy to both digitizing paths resulting in an inherent noise advantage. The signal spectra are "unfolded" using a DSP equivalent of the sampling process and combined to reproduce the input signal. Phase-inversion introduced by the sampling process causes intermediate frequency components to directly cancel one another. This simplifies the signal reconstruction and provides the lowest noise acquisition.

When designing and debugging high-speed communication/interface systems, not only wideband, but noise, effective bits (ENOB), waveform quality, such as frequency response, are also critical. ATI technology is a breakthrough technology that combines both broadband and waveform quality.

| Basic Specifications | DPO77002SX | | DPO75002SX | |
|---|--|--|--|--|
| Input Connector | ATI | TCA | ATI | TCA |
| Analog channels | 1 | 2 | 1 | 2 |
| Bandwidth | 70GHz ^{*1} | 33GHz | 50GHz | 33GHz |
| Sample rate per channel | 200GS/s | 100GS/s | 200GS/s | 100GS/s |
| Rise Time (20% - 80% ^{*1}) | 4.3ps | 9ps | 6ps | 9ps |
| Rise Time (10% - 90% ^{*1}) | 5.6ps | 13ps | 7.8ps | 13ps |
| Sensitivity Range | 100mV FS~300mV FS | 62.5mV FS~6V FS | 100mV FS~300mV FS | 62.5mV FS~6V FS |
| Vertical Noise (% of full scale), BWE on, max sample rate (typical) ^{*1} | 0.83% of full scale | 0.71% of full scale | 0.83% of full scale | 0.71% of full scale |
| | 0.75% of full scale @ 0 V offset (300 mVFS) | 0.56% of full scale @ 0 V offset (500 mVFS) | 0.75% of full scale @ 0 V offset (300 mVFS) | 0.56% of full scale @ 0 V offset (500 mVFS) |
| Record length, points (each channel, standard) | 62.5M | | | |
| Record length (each channel, Opt. 50XL) | 1G | | | |
| Timing Resolution | 5ps (200GS/s) | 10ps (100GS/s) | 5ps (200GS/s) | 10ps (100GS/s) |
| Time base accuracy | Typical: ±0.1 x 10 ⁻⁶ initial accuracy after adjustment. ^{*1} | | | |
| Dimensions, mass, power consumption | 1577 (height) x 452 (width) x 553 (depth) mm, 19kg (oscilloscope only, <980 W, single instrument, maximum, ≤780 W, single unit (typical) | | | |

| Basic Specifications | DPO73304SX | DPO72304SX | DPO71604SX | DPO71304SX |
|--|---|--|--|--|
| Input Connector | 2 | | | |
| Analog channels | 4 | | | |
| Bandwidth | 33GHz | 23GHz | 16GHz | 13GHz |
| Sample rate per channel | 2 ch 100 GS/s, 4 ch 50 GS/s | | | |
| Rise Time (20% - 80% ^{*1}) | 9ps | 13ps | 19ps | 23ps |
| Rise Time (10% - 90% ^{*1}) | 13ps | 17ps | 26ps | 32ps |
| Sensitivity Range | 62.5 mVFS to 6 VFS | | | |
| Vertical Noise (% of full scale), BWE on, max sample rate (typical) ^{*1} | 0.71% of full scale @ 0 V offset (500 mVFS) | 0.53% of full scale @ 0 V offset (500 mVFS) | 0.43% of full scale @ 0 V offset (500 mVFS) | 0.44% of full scale @ 0 V offset (500 mVFS) |
| Record length, points (each channel, standard) | 62.5M | | | |
| Record length (each channel, Opt. 50XL) | 1 G on 2 ch, 500 M on 4 ch | | | |
| Timing Resolution | 10ps (100GS/s) | | | |
| Time base accuracy | Typical: ±0.1 x 10 ⁻⁶ initial accuracy after adjustment. ^{*1} | | | |
| Dimensions, mass, power consumption | 157 (height) x 452 (width) x 553 (depth) mm, 19kg (oscilloscope only, <980 W, single instrument, maximum, ≤780 W, single unit (typical) | | | |

^{*1}Representative Value

P7700 Series TekFlex™ TriMode™ Probe Family

High bandwidth for signal fidelity

Easy to connect TekFlex™ Connector technology

- Minimal device impact
 - Active buffer tip design for low probe loading
- Easy to connect TekFlex™ Connector technology
 - Probe cable and solder down tips operate over an extended temperature range
 - Lightweight and flexible probe cable
- Industry-leading low-load performance for LPDDR and MIPI standards
- World's first probe and tip specific S-parameters
- Reduction of total cost of ownership

| | P7720 | | P7716 | P7713 | P7708 |
|---------------------|-------------------------------------|----------|-------|-------|-------|
| | P77C292MM P77STFLXA P77STCABL | P77BRWSR | | | |
| Bandwidth (typical) | 20GHz ^{*2} | 16GHz | 16GHz | 13GHz | 8GHz |
| Rise time (10-90%) | 27ps ^{*3} | 32ps | 32ps | 40ps | 55ps |
| Rise time (20-80%) | 18ps | 24ps | 24ps | 28ps | 35ps |

^{*2} Differential and single ended modes only. Bandwidth is 19 GHz in the common mode setting.

^{*3} Rise times in common mode setting: 29 ps (10 - 90%), 19 ps (20 - 80%).



P77STFLXA and P77STCABL
TekFlex connector and two types
of soldering tips



P77BRWSR
Handheld Browser
Accessory



P77C292MM
SMA/2.92mm adapter

| | Attenuation Ratio | Input Range | | Operating Voltage Window | Offset Voltage Range | DC Gain Accuracy | DC Input Resistance (Differential) |
|----------------|-----------------------|--------------|--------------|--------------------------|----------------------|------------------|------------------------------------|
| | | Single-Ended | Differential | | | | |
| Solder-in Tips | 4x | 2.5V p-p | 5.0V p-p | ±5.25V | -4V~+ 4V | ±2.0% | 100kΩ |
| Browser | 10 : 1 | 6.0V p-p | 12.0V p-p | ±10V | -10V~+ 10V | | 150kΩ |
| SMA Adaptor | 0.7x/1.3x/2.7x/5x/10x | 1.2V p-p | 2.0V p-p | ±4V | -4V~+ 4V | | 100Ω |

Oscilloscope Probes

Precision Measurements Start at the Probe Tip

Probes are vital to oscilloscope measurements. In addition to being vital to oscilloscope measurements, probes are also critical to measurement quality.

To maximize signal fidelity and measurement accuracy, it is important to select a probe that is compatible with your oscilloscope. As a leading provider of probe technology, Tektronix offers a broad line of proven products that have earned a reputation for robustness, reliability, and long service life.

Passive Probes



| Model | Frequency Range (-3db) | Attenuation | Maximum Input Voltage | Maximum Voltage | Input Impedance | Cable Length |
|------------------------|------------------------|-------------|--|--------------------|---------------------------|--------------|
| TPP0051 | 50MHz | 10:1 | 300V _{rms} | 15~25pF | 10MΩ/12pF | 1.3m |
| TPP0100 TPP0101 | 100MHz | 10:1 | 300V _{rms} | 8~18pF 15~25pF | 10MΩ/12pF | 1.3m |
| TPP0200 TPP0201 | 200MHz | 10:1 | 300V _{rms} | 8~18pF 15~25pF | 10MΩ/12pF | 1.3m |
| TPP0250 ^{*1} | 250MHz | 10:1 | 300V _{rms} | - | 10MΩ/3.9pF | 1.3m |
| TPP0500B ^{*1} | 500MHz | 10:1 | 300V _{rms} | - | 10MΩ/3.9pF | 1.3m |
| TPP0502 ^{*1} | 500MHz | 2:1 | 300V _{rms} | - | 2MΩ/12.7pF | 1.3m |
| TPP1000 ^{*1} | 1GHz | 10:1 | 300V _{rms} | - | 10MΩ/3.9pF | 1.3m |
| P2220 P2221 | 6/200MHz | 1:1/10:1 | 150V _{rms} / 300V _{rms} | 15~25pF 10~25pF | 1MΩ/110pF or 10MΩ/17pF | 1.5m |
| P3010 | 100MHz | 10:1 | 300V _{rms} | 10~15pF | 10MΩ/13.3pF | 2.0m |
| P5050B | 500MHz | 10:1 | 300V _{rms} | 15~22pF | 10MΩ/11.1pF | 1.3m |
| P6101B | 15MHz | 1:1 | 300V _{rms} | - | 1MΩ/100pF | 2.0m |
| P6139B | 500MHz | 10:1 | 300V _{rms} | 8~18pF | 10MΩ/8pF | 1.3m |

Low Voltage Single-Ended Probe



| Model | Frequency Range | Rise Time (10%~90%) | Attenuation | Dynamic Range | Offset Range | Input Impedance |
|-----------------------|-----------------|---------------------|-------------|---------------|--------------|-------------------|
| P6243 ² | 1GHz | ≤350ps | 10X | ±8V | - | 1 MΩ ≤ 1 pF |
| P6245 ² | 1.5GHz | ≤267ps | 10X | ±8V | ±10V | 1 MΩ ≤ 1 pF |
| TAP1500 ^{*1} | 1.5GHz | ≤267ps | 10X | ±8V | ±10V | 1 MΩ ≤ 1 pF |
| TAP2500 ^{*1} | 2.5GHz | <140 ps | 10X | ±4V | ±10V | 40 kΩ ≤ 0.8 pF |
| TAP3500 ^{*1} | 3.5GHz | <130 ps | | | | |
| TAP4000 ^{*1} | 4.0GHz | ≤115 ps | 10X | ±4V | ±10V | 40 kΩ ≤ 0.8 pF |

Low Voltage Differential Probe



| Model | Frequency Range | Rise Time (10%~90%) | Attenuation | Maximum Input Voltage | Offset Voltage | Input Impedance |
|-----------------------|-----------------|---------------------|-------------|------------------------------|---------------------------|--------------------|
| P6247 ² | 1GHz | ≤350ps | 1X, 10X | 1X : ±0.85 V 10X : ±8.5 V | ±7.0 V, 1X ±7.0 V, 10X | 200 kΩ <1 pF |
| P6248 ² | 1.5GHz | <265 ps | 1X, 10X | 1X : ±0.85 V 10X : ±8.5 V | ±7.0 V, 1X ±7.0 V, 10X | 200 kΩ <1 pF |
| TDP0500 ^{*1} | 500MHz | <700 ps | 5X / 50X | 50X : ±42 V 5X : ±4.25 V | ±35V | 1 MΩ ≤ 1 pF |
| TDP1000 ^{*1} | 1GHz | ≤350 ps | | | | |
| TDP1500 ^{*1} | 1.5GHz | <265 ps | 1X, 10X | 1X : ±0.85 V 10X : ±8.5 V | ±7.0V | 200 kΩ <1 pF |
| TDP3500 ^{*1} | 3.5GHz | ≤140 ps | 5X | ±2V | +5 V to -4 V | 100 kΩ ≤ 0.3 pF |
| TDP4000 ^{*1} | 4.0GHz | ≤125 ps | 5X | ±2V | +5 V to -4 V | 100 kΩ ≤ 0.3 pF |
| TDP7704 ^{*1} | 4.0GHz | <100 ps | 4X* | ±5.25V | +4 V to -4 V* | 100 kΩ 0.4 pF* |
| TDP7706 ^{*1} | 6.0GHz | <65 ps | 4X* | ±5.25V | +4 V to -4 V* | 100 kΩ 0.4 pF* |
| TDP7708 ^{*1} | 8.0GHz | <55 ps | 4X* | ±5.25V | +4 V to -4 V* | 100 kΩ 0.4 pF* |
| TDP7710 ^{*1} | 8.0GHz | <45 ps | 4X* | ±5.25V | +4 V to -4 V* | 100 kΩ 0.4 pF* |

* Characteristic value for soldering tips. The operating voltage to ground is the offset voltage. Please refer to the data sheet for the specifications of the browser and SMA adapter.

High Voltage Probe - Single Ended



| Model | Frequency Range (-3db) | Rise Time (10%~90%) | Attenuation | Maximum Input Voltage | Compensation Range | Input Resistance / Input Capacitance |
|-----------------------|------------------------|---------------------|-------------|-----------------------|--------------------|--------------------------------------|
| TPP0850 ^{*1} | 800MHz | <525ps | 50X | 2.5kV (DC+PeakAC) | - | 40 MΩ/ 1.8 pF |
| P5100A | 500MHz | <700ps | 100X | 2.5kV (DC+PeakAC) | 7~30pF | 40 MΩ/ 2.5 pF |
| P6015A* | 75MHz | ≤4.67ns | 1000X | 20kV _{rms} | 7~49pF | 100 MΩ/ 3.0 pF |

* For the lead-out function, specify P6015A Option 1R

¹ Equipped with TekVPI interface. This is a dedicated probe for TekVPI hard key oscilloscopes (MDO3000/4000, MSO/DPO4000B, MSO/DPO5000/B series, and 3/4/5/6 Series)

² Equipped with TekProbe LEVEL 2 interface

High Voltage Differential Probe



P5202A/P5205A

| Model | Frequency Range (-3db) | Rise Time (10%-90%) | Attenuation | Maximum Input Voltage (DC+PeakAC) | Offset Voltage | Input Impedance |
|------------------------|------------------------|---------------------|--------------|-----------------------------------|---------------------|-----------------|
| P5200A ^{*3} | 50MHz | ≤7.8ns | 50X / 500X | 1.3kV / 130V | 1kV _{rms} | 10 MΩ 2 pF |
| P5202A ^{*2} | 100MHz | ≤3.8ns | 20X / 200X | 640V/64V (DC+PeakAC) | 300V _{rms} | 5 MΩ 2 pF |
| P5205A ^{*2} | 100MHz | ≤3.8ns | 50X / 500X | 1.3kV/130V (DC+PeakAC) | 1kV _{rms} | 10 MΩ 2 pF |
| P5210A ^{*2} | 50MHz | ≤7.8ns | 100X / 1000X | 5.6kV/560V (DC+PeakAC) | 1kV _{rms} | 40 MΩ 2.5 pF |
| TMDP0200 ^{*1} | 200MHz | <1.8 ns | 25X / 250X | 750V/75V (DC+PeakAC) | 300V _{rms} | 5 MΩ 2 pF |
| THDP0200 ^{*1} | 200MHz | <1.8 ns | 50X / 500X | 1.5kV/150V (DC+PeakAC) | 1kV _{rms} | 10 MΩ 2 pF |
| THDP0100 ^{*1} | 100MHz | <3.5 ns | 100X / 1000X | 6.0kV/600V (DC+PeakAC) | 1kV _{rms} | 40 MΩ 2.5 pF |

Current Probe



A621



TCP0030A



CT6



1103 Probe Power Supply

| Model | Frequency Range | Rise Time (10/90%) | Current / div, or Conversion Ratio | Maximum Current | Maximum Peak Pulse Current ^{*7} | Current Time Product ^{*8} |
|------------------------|-----------------|--------------------|--|---|--|------------------------------------|
| A621 | 5Hz-50kHz | ≤ 7 μs | 1A (1mV/A) 100mA (10mV/A) 10mA (100mV/A) ^{*4} | 1,000A _{rms} (1mV/A) 200A peak (10mV/A) 20A peak (100mV/A) ^{*5} | 2000A _{peak} (1mV/A) | - |
| A622 | DC~100kHz | ≤ 3.5 μs | 100mA (10mV/A) 10mA (100mV/A) ^{*4} | 100A (DC) 10A (DC) ^{*6} | - | - |
| P6021A | 150Hz~60MHz | 5.8 ns | 2mA (0.5V/A) 10mA (0.1V/A) ^{*4} | 15A _{p-p} | 250A | 500A • μs |
| P6022 | 935Hz~120MHz | 2.9 ns | 1mA or 10mA ^{*4} | 6A | 100A | 9A • ms |
| TCP202A ^{*2} | DC~50MHz | ≤ 7 ns | 10mA (10A/V) ^{*4} | 15A (DC) | 50A | 500A • μs |
| TCP2020 ^{*3} | DC~50MHz | ≤ 7 ns | 10mA (10A/V) ^{*4} | 20A (DC) | 100A | 1000A • μs |
| TCP0020 ^{*1} | DC~50MHz | ≤ 7 ns | 10mA (10A/V) ^{*4} | 20A (DC) | 100A (1MΩ) 50A (50Ω) | 1000A • μs |
| TCP0030A ^{*1} | DC~120MHz | ≤ 2.92 ns | 1mA (1A/V) ^{*4} | 30A (DC) | 50A | 50A • μs (1A/V) |
| TCP0150 ^{*1} | DC~20MHz | ≤ 17.5 ns | 5mA (5A/V) ^{*4} | 150A (DC) | 500A | 3000A • μs (5A/V) |
| CT1 | 25kHz~1GHz | 0.35 ns | 200μA (5V/A) ^{*4} | 500mA _{rms} | 12A | 1A • μs |
| CT2 | 1.2kHz~200MHz | 0.5 ns | 1mA (1V/A) ^{*4} | 2.5A _{rms} | 36A | 50A • μs |
| CT6 | 250kHz~2GHz | 200 ps | 200μA (5V/A) ^{*4} | 120mA _{rms} | 6A | 0.25A • μs |

Rogowski Current Probes



TRCP0300

TRCP0600



TRCP3000

| Model | 周波数帯域 | Sensitivity | Peak Current | Minimum Current | Coil Diameter |
|----------|------------|-------------|--------------|-----------------|---------------|
| TRCP0300 | 9Hz~30MHz | 20mV/A | 300A | 250mA | 1.7mm |
| TRCP0600 | 12Hz~30MHz | 10mV/A | 600A | 500mA | 4.5mm |
| TRCP3000 | 1Hz~16MHz | 2.0mV/A | 3,000A | 500mA | 8.5mm |

Current Probe Set



TCPA Series

| Model | Frequency Range (-3db) | Rise Time (10%-90%) | Current / div, or Conversion Ratio | Maximum DC Current | Maximum Peak Pulse Current ^{*7} | Current Time Product ^{*8} |
|-------------------|------------------------|---------------------|---|--------------------|--|------------------------------------|
| TCPA300 +TCP312A | DC~100MHz | 3.5ns | 1mA (1A/V), 10mA(10A/V) ^{*4} | 30A | 50A | 50A • μs (1A/V) |
| TCPA300 +TCP305A | DC~50MHz | 7ns | 5mA (5A/V), 10mA (10A/V) ^{*4} | 50A | 50A | 500A • μs (5A/V) |
| TCPA300 +TCP303 | DC~15MHz | 23ns | 5mA (5A/V), 50mA (50A/V) ^{*4} | 150A | 500A | 3,000A • μs (5A/V) |
| TCPA400 +TCP404XL | DC~2MHz | 175ns | 1A (1A/mV) ^{*4} | 750A | 750A | NA (1A/mV) |

^{*1} Equipped with TekVPI interface^{*2} Equipped with TekProbe Level 2 interface^{*3} AC Adapter included^{*4} Value when the oscilloscope is set to 1mV/div^{*5} At ≤ 2kHz^{*6} At ≤ 10kHz^{*7} Depends on core saturation.^{*8} Decreases depending on the duty cycle and frequency.

Note:

For more information on probe, visit:

www.tek.com/accessories

NEW TIVP Series

IsoVu™ Isolated Differential Probes

See the signals that were hidden!

100% IsoVu Probe Technology
1/5 smaller, greater performance and easier to use

- Bandwidths: DC~1GHz
- Common mode voltage range: 60 kV peak (DC~1GHz)
- High CMRR: 160dB (DC~1MHz), 100dB @ 500MHz
- Maximum differential input voltage: ± 2500V
- Maximum offset range: ± 2500V
- 2m or 10m fiber optic
- Sensor head that does not require battery replacement or charging
- With a wide range of connectors and accessories
Secure and flexible connection



Uncover the fast, floating signals that your non-isolated probes are hiding. IsoVu™ Probe Technology virtually eliminates common mode interference using optical isolation. This delivers accurate differential measurements on reference voltages slewing ±60kV at 100V/ns or faster. And with our IsoVu Generation 2 design, you get all the benefits of IsoVu technology at 1/5 of the size.



IsoVu Applications


- Half / Full bridge designs using SiC or GaN, FETs, or IGBTs
- Floating measurements in power supplies
- Power converter design
- Power device evaluation
- Switched Mode Power Supply design
- Inverter design
- Motor Drive design
- Electronic ballast design
- EMI and ESD troubleshooting
- Current shunt measurements

Main Performance


| Model | Bandwidth | Rise Time | Cable Length | Maximum differential Input voltage | Maximum input Offset range | Maximum common mode voltage |
|---------|-----------|-----------|--------------|------------------------------------|----------------------------|-----------------------------|
| TIVP1 | 1GHz | 450 ps | 2m | ±2500V* | ±2500V* | 60kV |
| TIVP1L | 1GHz | 450 ps | 10m | ±2500V* | ±2500V* | 60kV |
| TIVP05 | 500MHz | 850 ps | 2m | ±2500V* | ±2500V* | 60kV |
| TIVP05L | 500MHz | 850 ps | 10m | ±2500V* | ±2500V* | 60kV |
| TIVP02 | 200MHz | 2ns | 2m | ±2500V* | ±2500V* | 60kV |
| TIVP02L | 200MHz | 2ns | 10m | ±2500V* | ±2500V* | 60kV |

* When using TIVPWS500X

Wide Bandgap Semiconductor High-side Vgs Measurement example

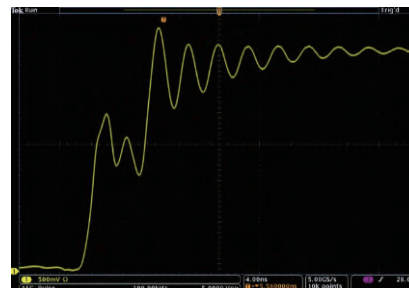

Observation example with IsoVu

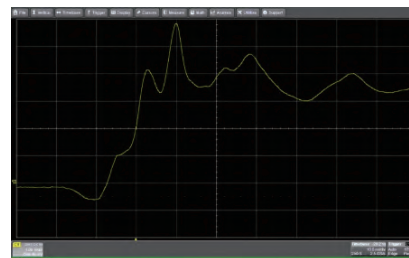

Observation example with a differential probe made by another company

| Sensor Tip Cable | Differential input voltage range | Offset range | Input impedance | Maximum Non-Destructive Differential Voltage (DC + peak AC) | CMRR | | |
|---|----------------------------------|--------------|---------------------|---|---------|--------|-------|
| | | | | | DC~1MHz | 500MHz | 1GHz |
| SMA Input (50 Ω mode) | ±5V | ±25V | 50Ω | 5V _{rms} | 160dB | 100dB | 90dB |
| SMA Input (1 MΩ mode) | ±5V | ±25V | 1MΩ 11pF | 100Vpk | 160dB | 100dB | 90dB |
| MMCX Connector Sensor Tip Cable | | | | | | | |
| TIVPMX10X | ±50V | ±200V | 10MΩ 2.8pF | 250Vpk | 160dB | 85dB | 80dB |
| TIVPMX50X | ±250V | ±250V | 10MΩ <5pF* | 300Vpk* | 160dB* | 73dB* | 70dB* |
| TIVPMX1X | ±5V | ±25V | 50Ω or 1MΩ 28 pF | 5V _{rms} (50Ω), 100Vpk (1MΩ) | 160dB* | 100dB* | 90dB* |
| 2.54mm Square Pin Sensor Tip Cable | | | | | | | |
| TIVPSQ100X | ±500V | ±500V | 10MΩ <5pF* | 600Vpk* | 160dB* | 39dB* | 30dB* |
| 5.08mm Square Pin Sensor Tip Cable | | | | | | | |
| TIVPWS500X | ±2500V | ±2500V | 40MΩ <4pF* | 3300Vpk* | 160dB* | 33dB* | 25dB* |

* Provisional Value

ESD Test



TPR Series

Power Rail Probes

World's Best-In-Class Power Integrity Solutions

- Top-class low system noise enables minute level ripple measurement
- 1GHz and 4GHz frequency bands that can handle high-speed transients
- Large offset voltage of $\pm 60V$ and dynamic range of $\pm 1V$
- Flexible and abundant probing for soldering, browser, high temperature support, etc.
- Rich automatic measurement capabilities to improve test reliability

Power rail probes offer low noise, low loading, high bandwidth, and high DC offset specifically for power integrity measurements.


For engineers that are working on the power integrity of fast devices like microprocessors, memory components, FPGAs, storage devices and image sensors, and need the highest accuracy in ripple measurements with transitions – Tektronix has the solution to meet your every need.”




| Model | Bandwidth | Offset Voltage Range | Dynamic range | Input Resistance | Input Coupling | System Noise | Attenuation | Connectivity and accessories |
|---------|-----------|----------------------|---------------|-----------------------------------|------------------|--|-------------|------------------------------------|
| TPR1000 | 1GHz | $\pm 60V$ | $\pm 1V$ | 50k Ω DC 50 Ω AC | DC, LF Reject | <300 μV p-p (20MHz BW Limit) <1.3mV p-p (Full Bandwidth) | 1.25x | New browser, solder-in and snap-on |
| TPR4000 | 4GHz | | | | | | | |

Comparison with other Probes


TPR Series Probe 1GHz Band Limitation

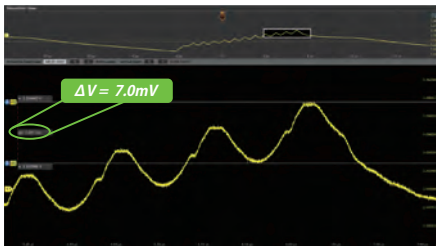


TPP1000 Passive Probe 1GHz Band Limitation

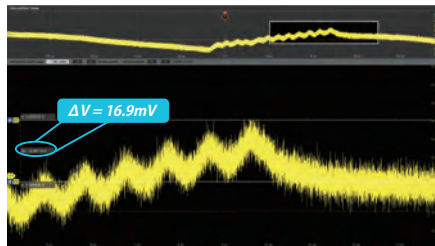

TPR Series Probe 20MHz Band Limitation

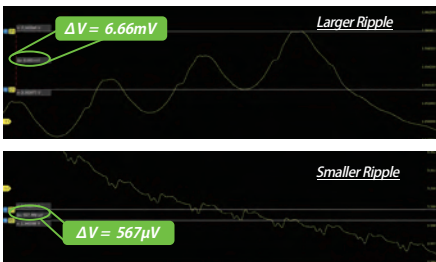

TPP1000 Passive Probe 20MHz Band Limitation

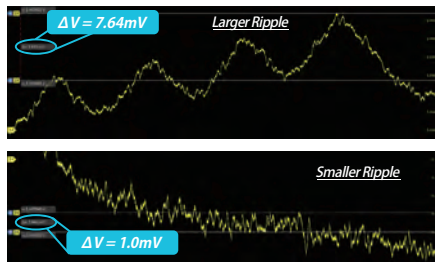

Digital Power Management And Analysis Software 5-DPM And 6-DPM

The solution enables simultaneous analysis of multiple power rails using power rail probes, sequencing of measurements using passive probes and it also generates an automated report.

Measurements

- Ripple
- Overshoot / Turn-on Undershoot
- Settling Time
- Turn-on / Turn-off times
- Ringing
- Voltage Management
- Slew Rate
- Jitter Analysis

Recommended Accessories

- TPR4KIT Standard Accessory Kit (standard attachment)
- TPR4KITHT High Temperature Accessory Kit
- TPR4SIAFLEX Soldering Flex Adapter Kit
- TPR4SIACOAX Soldering Coaxial Adapter Kit
- TPRBRWSR1G 1GHz Browser

Recommended Accessories

| Accessory | TPR4KIT | TPR4KITHT | TPRBRWSR1G | TPR4SIAFLEX | TPR4SIACOAX |
|--|----------|-----------|------------|-------------|-------------|
| | Standard | Option | Option | Option | Option |
| SMA-MMCX cable (1.3m) | ✓ | | | | |
| SMA-SMA cable (1.3m) | ✓ | | | | |
| SMA-MMCX temperature resistant cable (2m)* | | ✓ | | | |
| Browser Probe | | | ✓ | | |
| Y lead adapter | ✓ | | ✓ | | |
| Clamp | ✓ | | ✓ | | |
| U.FL Connector | ✓ | | | | |
| MMCX-Square Pin Adapter | ✓ | | | | |
| Soldering Tip | ✓ | ✓ | | | ✓ |
| Soldering Flex Tip | ✓ | ✓ | | ✓ | |

*Temperature range at the tip: -40 to +155°C

Signal Generators



Tektronix signal generators cover a wide range of applications from replicating sensor signals to creating high-speed serial data or RF signals with digital modulation applied.

AFG31000

Arbitrary Function Generator

Real-time waveform monitoring, built-in ARB waveform creation, low noise

The AFG31000 Series with InstaView™ technology is the first high-performance AFG with built-in waveform generation applications, patented real-time wave monitoring, and a modern user interface.

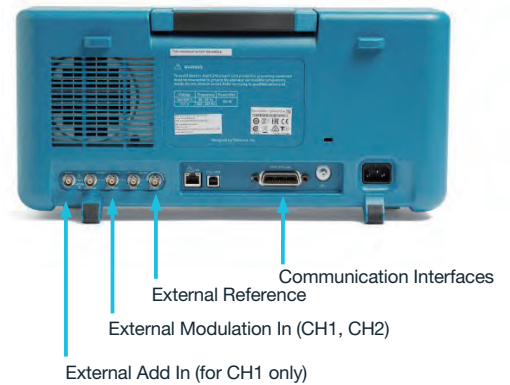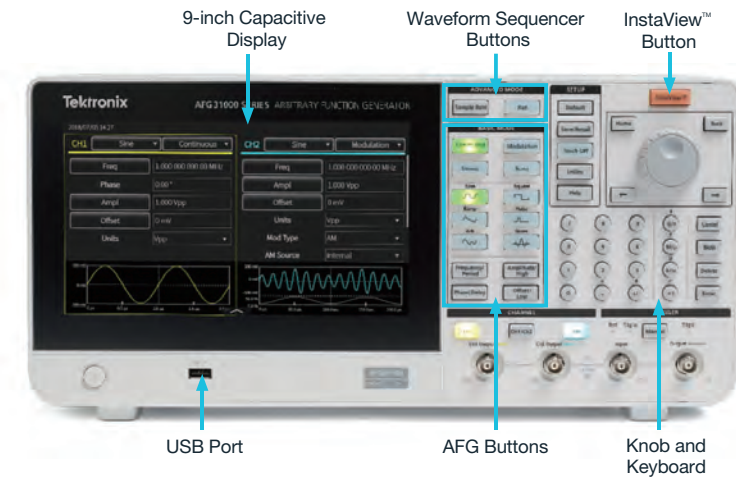


- 9-inch capacitive display touchscreen
- Monitor waveform added at device under test (DUT) in real time (InstaView™)
- Programmable waveform sequencing
- Built-in waveform creation capabilities
- Excellent performance – 10x less noise, 40x less jitter, 1,000x memory
- Upgrade with new options to keep evolving with your needs

Save Time and Effort with the 9-inch Touchscreen





The AFG31000 Series features the industry's largest AFG touchscreen; pinch, zoom, and scroll just like a smart device to easily locate settings and parameters on the simple menu or shortcuts to frequently-used settings.

Verify Waveform at the Device Under Test: InstaView™




The traditional AFG™ products display only the setting parameters or ideal waveforms. In order to see the actual waveform on the load of the generator or the input of the DUT, an oscilloscope is needed to probe the related test points.


Patented InstaView™ technology, the AFG31000 Series, lets you see the actual waveform at the device under test (DUT) in real time – without an oscilloscope or probe – eliminating any uncertainty typically caused by mismatched impedance.

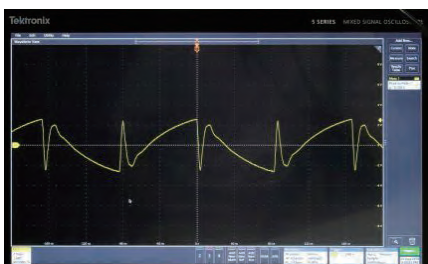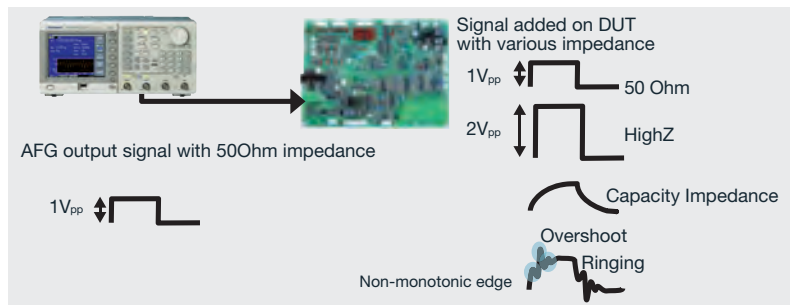

Waveform on Oscilloscope. DUT impedance impacts the waveform.

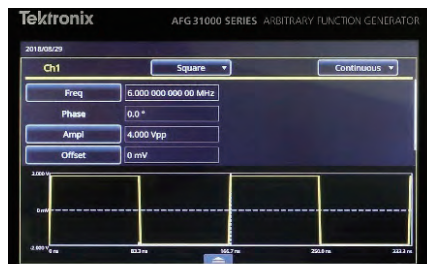


With InstaView on AFG31000 turned off. Due to an impedance mismatch, the AFG display shows a different waveform from the one observed at the DUT.

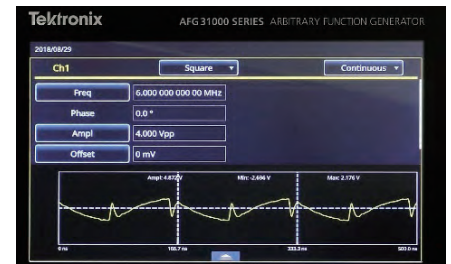

With InstaView on AFG31000 turned on. The AFG31000 shows the waveform as observed at the DUT.

Generate Multiple Waveforms with Complex Timing

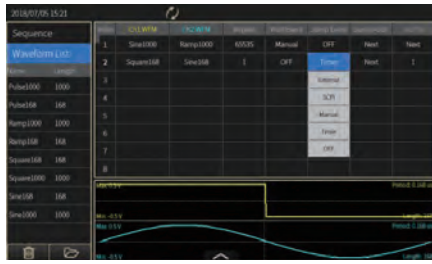

Key Settings

Visible at a glance, and are easy to adjust using touch, numeric keypad, or rotary controls

Advanced waveform generation and programming capabilities make it easy to compose a list or a sequence of 1 to 256 waveforms with total waveform length up to 16 Mpts/ch (128 Mpts/ch optional) and define the output sequence of these waveforms.


Double Pulse Test in Under a Minute



AFG31000 Double Pulse user interface

Double Pulse Testing measure switching parameters and evaluate the dynamic behaviors of MOSFET and IGBT power devices. The AFG31000 is the first function generator on the market that includes built-in double pulse test software. You can generate two waveforms with varying pulse widths (from 20 ns to 150 μ s) in under a minute directly on the touchscreen display. No need for an external PC application or manual programming.

Built-in ArbBuilder Tool Create and edit Arbitrary Waveforms easier than ever

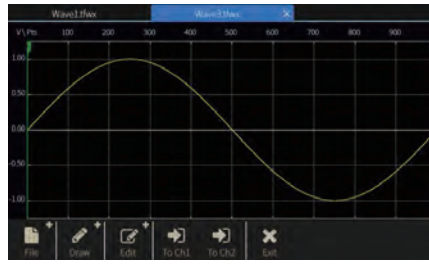


Waveform editing screen

Creating an arbitrary waveform using the easy touch screen interface

The built-in ArbBuilder editing tool includes everything you need to create, edit, and transfer an ARB waveform without the need to connect to a PC.

Simplified Multi-unit Synchronization

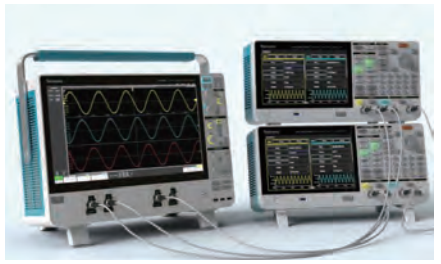

Example of how to sync two AFG31000 units

Most applications need one or two channels of output, but some applications require more channels (e.g. 3-phase power signals). The AFG31000 simplifies this process with an onscreen wizard that leads you through the process of making cable connections and configuring settings to synchronize multiple generators.

Instrument Options


Opt. MEM..... Extends arb memory to 128 Mpt
Opt. SEQ..... Enables sequence mode

Recommended Accessories

012-1732-xx... BNC cable shielded, 3 ft.
012-0991-xx... GPIB cable, double shielded
011-0049-02... 50 Ω BNC terminator
ACD4000B..... Soft transit case
HCTEK54..... Hard transit case (requires ACD4000B)

Service options

C3..... Calibration Service 3 Years
C5..... Calibration Service 5 Years
D1..... Calibration Data Report
D3..... Calibration Data Report 3 Years (with Opt. C3)
D5..... Calibration Data Report 5 Years (with Opt. C5)
R5..... Repair Service 5 Years
T3..... Three Year Total Protection Plan
T5..... Five Year Total Protection Plan

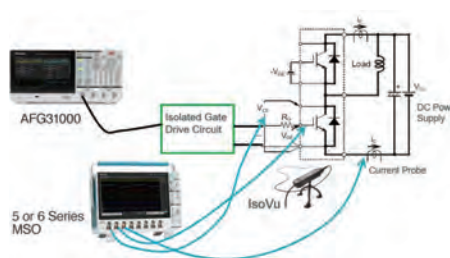

| Basic Specifications | AFG31021 | AFG31022 | AFG31051 | AFG31052 | AFG31101 | AFG31102 | AFG31151 | AFG31152 | AFG31251 | AFG31252 |
|--|--|----------|--|----------|--------------------|----------|--|----------|--------------------|----------|
| Analog Channels | 1 | 2 | 1 | 2 | 1 | 2 | 1 | 2 | 1 | 2 |
| Range (into 50 Ω) | ≤ 60 MHz: 1mV p-p~10V _{p-p} | | | | | | ≤ 200 MHz: 1mV p-p~5V _{p-p} | | | |
| | > 60 MHz~ ≤ 80 MHz: 1mV p-p~8V p-p | | | | | | > 200 MHz~ ≤ 250 MHz: 1mV p-p~4V p-p | | | |
| | > 80 MHz~ ≤ 100 MHz: 1mV p-p~6V p-p | | | | | | | | | |
| Vertical resolution | 14 bits | | | | | | | | | |
| Physical characteristics and Power Consumption | 192 (Height) \times 413 (Width) \times 143 (Depth) mm, 4.9 Kg (Weight), Consumption: 120W | | | | | | | | | |
| Basic (AFG) Mode | | | | | | | | | | |
| Standard waveforms | Sine, Square, Pulse, Ramp, More (Noise, DC, Sin(x)/x, Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine) | | | | | | | | | |
| Sine | 1 μ Hz~25MHz* | | 1 μ Hz~50MHz* | | 1 μ Hz~100MHz* | | 1 μ Hz~150MHz* | | 1 μ Hz~250MHz* | |
| Square | 1 μ Hz~20MHz* | | 1 μ Hz~40MHz* | | 1 μ Hz~80MHz* | | 1 μ Hz~120MHz* | | 1 μ Hz~160MHz* | |
| Pulse | 1 μ Hz~20MHz | | 1 μ Hz~40MHz | | 1 μ Hz~80MHz | | 1 μ Hz~120MHz | | 1 μ Hz~160MHz | |
| Pulse width | 16ns~999.99s | | 10ns~999.99s | | 6ns~999.99s | | 5ns~999.99s | | 4ns~999.99s | |
| Pulse width resolution | 10 ps or 5 digits | | | | | | | | | |
| Pulse Duty | 0.001%~99.999% (limitations of pulse width apply) | | | | | | | | | |
| DC (50 Ω) | -5V~5V | | | | | | -2.5V~2.5V | | | |
| Noise type (White Gaussian) | 150MHz | | | | | | 360MHz | | | |
| Other waveforms | 1 μ Hz~500kHz | | 1 μ Hz~800kHz | | 1 μ Hz~1MHz | | 1 μ Hz~1.5MHz | | 1 μ Hz~2.5MHz | |
| Arbitrary waveforms | | | | | | | | | | |
| Frequency range | 1mHz~12.5MHz* | | 1mHz~25MHz* | | 1mHz~50MHz* | | 1mHz~75MHz* | | 1mHz~125MHz* | |
| Waveform length | 2~131 kpoints | | | | | | | | | |
| Sample rate | 250MS/s | | 1GS/s (Waveform length >16k points: 250MS/s) | | | | 2GS/s (Waveform length >16k points: 250MS/s) | | | |
| Jitter, RMS, typical | 3.0 ps RMS | | 2.5 ps RMS | | 2.0 ps RMS | | 1.6 ps RMS | | | |
| Modulation | AM/FM/PM/FSK/PWM | | | | | | | | | |
| Other Run modes | Continuous, Modulation, Sweep and Burst | | | | | | | | | |
| Advanced (Waveform Sequence) Mode | | | | | | | | | | |
| Waveform memory size | 16 Mpts (128 Mpts optional) each channel | | | | | | | | | |
| Number of waveform entries | 1Continuous, Triggered, Gated: 1, Sequence: 1 to 256 | | | | | | | | | |
| Jump/trigger events | External trigger (rising or falling edge), manual trigger, timer, SCPI commands | | | | | | | | | |
| Variable sample rate | 1 μ S/s~250MSa/s | | 1 μ S/s~500MS/s | | 1 μ S/s~1GS/s | | 1 μ S/s~2GS/s | | | |

*In burst mode, the maximum frequency is halved.

Accessories: BNC cable shielded, 3 ft., USB cable, A to B, 3 ft., Power cord, NIST-traceable calibration certificate, 3-year warranty

AFG1022 / AFG1062

Arbitrary / Function Generator


New standard for arbitrary waveforms / function generators
2ch, Best-in-class performance and functionality at affordable price

- Dual-channel output
- 25 MHz or 60 MHz sine waveforms, 12.5 MHz or 30 MHz square waveforms
- 14 bits, Sample rate of up to 300 MS/s arbitrary waveforms
- Modulation, sweeping, and burst modes (only available for CH1 on AFG1022)
- Built-in 6-digit frequency counter




Width: 230mm Height: 112mm
Depth: 307mm Weight: 3.4kg

AFG1062



Sweep setting interface



Frequency counter function interface



- 1 Ref CLK out
- 2 Ref CLK / Counter in
- 3 Ext Trigger / Burst / FSK in
- 4 Ext Modulation Input
- 5 USB Device
- 6 Chassis ground
- 7 Line selector (110 / 220VAC)

AFG2021

Arbitrary / Function Generator

Compact and easy-to-use multifunctional function generator

- 20 MHz sine, 10 MHz square and pulse waveforms
- 250 MS/s sampling rate and 14-bit vertical resolution
- 12 built-in standard waveforms
- Built-in Modulation, Noise Generator, Burst, and Sweep modes
- Innovative UI for quick and easy access
- USB remote control port and USB flash drive port are included
- GPIB and LAN interfaces are available as an option



Width: 242mm Height: 104mm Depth: 419mm
Weight: 2.9kg

Arbitrary Function Generator Models below 100MHz

| Basic Specifications | AFG1022 | AFG1062 | AFG2021 | AFG3011C (High Output Model) |
|------------------------------------|---|---|--|---------------------------------------|
| Analog Channels | 2 | | 1 | 1 |
| Amplitude (50Ω) | 1mV _{pp} ~10V _{pp} | 1mV _{pp} ~10V _{pp} (≤25 MHz) 1mV _{pp} ~5V _{pp} (≤25 MHz) | 10mV _{pp} ~10V _{pp} | 20mV _{pp} ~20V _{pp} |
| Output range | ±5V | | | ±10V |
| Waveforms | Sine, Square, Pulse, Ramp, Noise, and 45 Frequently Used Arbitrary Waveforms | | Sine, Square, Pulse, Ramp, Triangle, Sin(x)/x, Exponential Rise and Decay, Gaussian, Lorentz, Haversine, DC, Noise | |
| Sine wave | 1μHz~25MHz ^{*1} | 1μHz~60MHz ^{*1} | 1μHz~20MHz ^{*2} | 1μHz~10MHz ^{*2} |
| Square wave | 1μHz~12.5MHz ^{*1} | 1μHz~30MHz ^{*1} | 1μHz~10MHz | 1μHz~5MHz |
| Ramp wave | 1μHz~1MHz ^{*1} | 1μHz~2MHz ^{*1} | 1μHz~200kHz | 1μHz~100kHz |
| Other waveforms | - | | 1μHz~200kHz | 1μHz~100kHz |
| Noise Type | White Gaussian | | | |
| Noise bandwidth (-3 dB) | 25MHz | 50MHz | 20MHz | 10MHz |
| DC (50Ω) | -5~+5V | | | -10~+10V |
| Pulse wave | 1μHz~12.5MHz | 1μHz~30MHz | 1mHz~10MHz | 1mHz~5MHz |
| Pulse width range | 40.00ns~999s | 17.00ns~999s | 30.00ns~999.99s | 80.00ns~999.99s |
| Pulse width resolution | 1 ns or 4 digits | | 10 ps or 5 digits | |
| Arbitrary Waveforms | 1μHz~10MHz ^{*3} | 1μHz~30MHz ^{*3} | 1mHz~10MHz ^{*2} | 1mHz~5MHz ^{*2} |
| Effective Analog Bandwidth (-3 dB) | 30MHz | 60MHz | 34MHz | 8MHz |
| Memory: Sample Rate | 2~8,192: 125MS/s | 2~1M: 300MS/s | 2~128K: 250MS/s | 2~128K: 250MS/s |
| Vertical Resolution | 14 bits | | | |
| Rise/Fall Time | < 10 ns | < 8 ns | ≤20 ns | ≤80 ns |
| Jitter (RMS) | < 6 ns (typical) | | 4ns | 4ns |
| Modulation | AM/FM/PM/FSK | AM/FM/PM/ASK FSK/PSK/PWM | AM/FM/PM/FSK/PWM | |
| Other output modes | Sweep (Linear, logarithmic), and burst (Triggered, gated) modes are only available for channel 1 on the AFG1022. | | Sweep (Linear, logarithmic), and burst modes (Triggered, gated) modes | |

^{*1} In burst mode, the minimum frequency is 2 mHz and the maximum frequency is halved.

^{*2} In burst mode, the maximum frequency is halved.

^{*3} Burst mode 2mHz~2.5MHz

AWG5200

Arbitrary Waveform Generator

Windows10


Signal Generators



Less noise. Cleaner Signals.
A scalable, flexible, affordable arbitrary waveform generator.

- Sample rates up to 10 GS/s (with 2x interpolation)
- 2, 4, and 8 channel configurations
- 16 bits vertical resolution
- Digital outputs: 4 markers/channel, 32 max
- Output RF signals directly up to 4 GHz
- Synchronize multiple units to achieve a multi-channel high speed AWG system

Low Noise, High Quality Signal

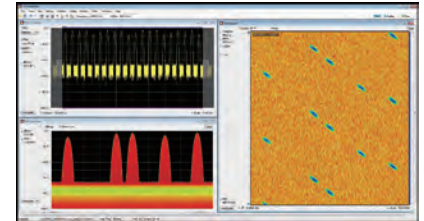

Scalable, Flexible, Low-cost



| Basic Specifications | AWG5202 | AWG5204 | AWG5208 |
|---|---|---------|---------|
| Number of analog outputs | 2 | 4 | 8 |
| Sample rate (nominal) | 300 S/s to 5 GS/s (10 GS/s Interpolated - Double Data Rate) | | |
| Resolution (nominal) | 16 bits (12 - 16 bits depending on the number of active markers) | | |
| Sin(x)/x (-3dB) | 2.22 GHz @ 5 GS/s, 4.44 GHz Interpolated @ 10 GS/s | | |
| Analog output characteristics | | | |
| Effective frequency output | Fmaximum (specified) is determined as "sample rate / oversampling rate" or "SR / 2.5". 2 GHz, 4 GHz (Double Data Rate - DDR mode) | | |
| DC High Bandwidth output | Amplitude levels are measured as singled-ended outputs. Output doubles when using differential (both) outputs. | | |
| Amplitude range | 25 mV _{p-p} to 0.75 V _{p-p} (single ended, 50 Ω terminated) | | |
| Amplitude accuracy (guaranteed) | ±2% of setting ≥ 100 mV _{p-p} , ±5% of setting < 100 mV _{p-p} | | |
| Offset | ±2 V (50 Ω into gnd), ±4 V into DC voltage terminated | | |
| Analog bandwidth | At 750 mV _{p-p} : DC to 2 GHz (3 dB), DC to 4 GHz (6 dB) | | |
| DC High Bandwidth Amplified output (option) | Amplitude levels are measured as singled-ended outputs. Output doubles when using differential (both) outputs. | | |
| Amplitude range | 25 mV _{p-p} to 1.5 V _{p-p} (single ended, 50 Ω terminated) | | |
| Amplitude accuracy (guaranteed) | ±2% of setting ≥ 100 mV _{p-p} , ±5% of setting < 100 mV _{p-p} | | |
| Offset | ±2 V (50 Ω into GND), ±4 V into DC voltage terminated | | |
| Analog bandwidth | At 750 mV _{p-p} : DC to 2 GHz (3 dB), DC to 4 GHz (6 dB) At 1.5 V _{p-p} : DC to 1.3 GHz (3 dB) | | |
| DC High Voltage output | Amplitude levels are measured as singled-ended outputs. Output doubles when using differential (both) outputs. | | |
| Amplitude range | 10 mV _{p-p} to 5.0 V _{p-p} (single ended, 50 Ω terminated) | | |
| Amplitude accuracy (guaranteed) | ±2% of amplitude ≥ 160 mV _{p-p} , ±5% of amplitude < 160 mV _{p-p} | | |
| Offset | ±2 V (50 Ω into GND), ±4 V into high resistance or matching voltage terminated | | |
| Analog bandwidth | DC - 370 MHz (3 dB) (at 2 V _{p-p}) DC - 200 MHz (3 dB) (at 4 V _{p-p}) | | |
| AC Direct output | Amplitude levels are measured as singled-ended outputs | | |
| Amplitude range | -17 dBm to -5 dBm | | |
| Amplitude accuracy | ±0.5 dBm at 100 MHz | | |
| DC bias | ±5 V at 150 mA | | |
| Analog bandwidth | 10 MHz - 2 GHz (-3 dB), 10 MHz - 4 GHz (-6 dB) | | |
| AC Amplified output (option) | Amplitude levels are measured as singled-ended outputs | | |
| Amplitude range | -85 dBm to +10 dBm (10 MHz to 3.5 GHz), -50 dBm to +10 dBm (>3.5 GHz to 5 GHz) | | |
| Amplitude accuracy | ±0.5 dBm at 100 MHz | | |
| DC bias | ±5 V at 150 mA | | |
| Analog bandwidth | 10 MHz - 2 GHz (-3 dB), 10 MHz - 4 GHz (-6 dB) | | |
| Channel timing characteristics | | | |
| Bit rate | Bit rate determined as "sample rate / 4 points per cycle", allowing full impairment generation 1.25Gbps | | |
| Rise/fall time | Rise/fall time measured at 20% to 80% levels. < 110 ps at 1.5 V _{p-p} single-ended termination, < 180 ps at 1.5 V _{p-p} single-ended Opt. DC | | |
| SFDR Performance | -80dBc (100MHz frequency output, DC to 1GHz, 10GS/s, DC direct) | | |
| Markers | | | |
| Number of outputs | 8 | 16 | 32 |
| Marker sample rate | Up to 5 GS/s | | |
| Minimum pulse width | 400 ps | | |
| Max data rate | 2.5 GS/s | | |

AWG5202

| Option | AWG5202 |
|-------------|--|
| Opt. 225 | 2.5GS/s |
| Opt. 250 | 5 GS/s (10 GS/s interpolated) |
| Opt. 2DC | High Bandwidth Amplified outputs |
| Opt. 2HV | High Voltage outputs |
| Opt. 2AC | AC Amplified outputs |
| Opt. 2DIGUP | Digital up conversion (requires AWG5200-250) |

AWG5204

| Option | AWG5204 |
|-------------|--|
| Opt. 425 | 2.5GS/s |
| Opt. 450 | 5 GS/s (10 GS/s interpolated) |
| Opt. 4DC | High Bandwidth Amplified outputs |
| Opt. 4HV | High Voltage outputs |
| Opt. 4AC | AC Amplified outputs |
| Opt. 4DIGUP | Digital up conversion (requires AWG5200-450) |

AWG5208

| Option | AWG5208 |
|-------------|--|
| Opt. 825 | 2.5GS/s |
| Opt. 850 | 5 GS/s (10 GS/s interpolated) |
| Opt. 8DC | High Bandwidth Amplified outputs |
| Opt. 8HV | High Voltage outputs |
| Opt. 8AC | AC Amplified outputs |
| Opt. 8DIGUP | Digital up conversion (requires AWG5200-850) |

Recommended Accessories

| | |
|-------------|--|
| Opt. SEQ | Sequencing |
| Opt. ACCY01 | USB mouse, compact USB keyboard, touch screen stylus |
| GF-RACK3U | Rack mount kit |

AWG7000B Series

Arbitrary Waveform Generator

Windows10



For cutting edge applications

- Sample rates up to 50 GS/s
- Waveform memory of up to 32 GSamples
- 1 channel or 2-channels waveform output
- -80 dBc spurious free dynamic range (SPDR)
- 10 bits vertical resolution
- Sequencer with Streaming ID

| Basic Specifications | AWG70001B | AWG70002B |
|---|--|---|
| Number of channels | 1 | 2 |
| Waveform memory length | Standard: up to 2 GSamples, with extended memory: up to 32 GSamples* | Standard: up to 2 GSamples per channel, With extended memory: up to 16 GSamples per channel |
| Sample rate | 1.5 kS/s - 50 GS/s | 1.5 kS/s - 25 GS/s |
| Resolution | Amplitude is measured at a single-ended output. >3dB at differential output | |
| Sin(x)/x Roll Off | | |
| Sin(x)/x (-3dB) | 11.1GHz | |
| Frequency related performance | | |
| Effective frequency output | 20GHz | 10GHz |
| Output amplitude | Amplitude is measured at a single-ended output. >3dB at differential output | |
| Output flatness | Sin(x)/x response is mathematically removed from the measured response before recording the -3 dB crossing. | |
| Flatness | ±1.8 dB up to 10 GHz, +1.8 dB to -3 dB from 10 GHz to 15 GHz | +0.8 dB to -1.5 dB up to 10 GHz |
| Analog Bandwidth | 15 GHz @ 50GS/s | 13.5 GHz @ 25GS/s |
| Output Matching | | |
| SWR | 1.32 : 1 (DC-5GHz, 1.52 : 1 (5-10GHz), 1.73 : 1 (10-20GHz) | 1.61 : 1 (DC-10GHz) |
| Time-related characteristics | | |
| Serial Data Bit Rate | Bit rate determined as "sample rate / 4 points per cycle", allowing full impairment generation. | |
| Bit Rate | 12.5Gbps | 6.25Gbps |
| Rise/fall time | Rise / fall time measured at 20% to 80% levels, related by a factor of 0.75 to the industry standard of 10% to 90% levels | |
| Tr/Tf | Sampling rate ≤ 25 GS/s: < 23 ps Sampling rate at 50 GS/s: < 27 ps | < 22 ps |
| Output amplitude related characteristics | | |
| Output amplitude | Amplitude levels are measured between differential outputs (+) to (-). For single-ended output, the amplitude level will be one-half the specified voltage levels. | |
| Range | 500mV _{p-p} ~1V _{p-p} | |
| Resolution | 1.0mV | |
| DC Accuracy | ±(2% of amplitude + 1 mV) | |
| SFDR Performance | -80dBc (100MHz output frequency, DC-1GHz (typical) | |

*Non-interleaved when ≤ 25GS/s


| Options | Description |
|------------|---|
| Opt. 150 | 50 Gs/s Sample Rate for AWG70001B |
| Opt. 208 | 8 Gs/s sample rate for the AWG 70002B |
| Opt. 216 | 16 Gs/s sample rate for the AWG 70002B |
| Opt. 225 | 25 Gs/s sample rate for the AWG 70002B |
| Opt. MEM | Increase memory to 32GS (on AWG70001B) or 16GS per channel (on AWG70002B) |
| Opt. STRID | Streaming ID to the AWG70002B |
| Opt. AC | Amplifier and attenuator option for AWG 70000 series |
| Opt. SEQ | Sequencing to the AWG70002B |

AWG7000B Recommended Accessories

| | |
|--------------------|--|
| AWGRACK | Rack mount kit for AWG70000 Series |
| AWG701BUP Opt. SSD | Replacement / additional Solid State Disc Drive (AWG700001B) |
| AWG702BUP Opt. SSD | Replacement / additional Solid State Disc Drive (AWG700002B) |
| AWGSYNC01 | Synchronization Hub |

Signal Generators

SourceXpress™ Arbitrary Waveform Generator Software

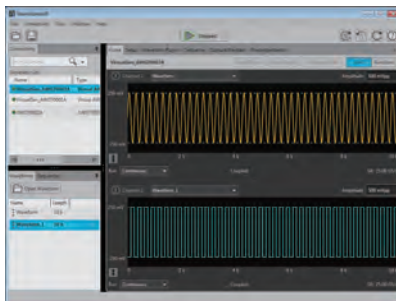

- Software control one or several AWG instruments from one application
- Create waveform using tools specifically targeted for your needs from your PC
- Supports various applications with an ever growing library of plug-ins
- Work seamlessly and remotely to develop offline waveforms with the same UI on the AWGs
- Create waveforms, sequences and sub-sequences with ease

Plug-ins

| Plug-in | Description | Nomenclature |
|----------------------------------|---|--|
| Multitone & Chirp plug-in | Create generate chirps, notches and tones | MTONENL-SS01 MTONEFL-SS01 |
| PreCompensation plug-in | Create correction coefficients that can be applied on waveforms to get flat frequency and linear phase response | PRECOMNL-SS01 PRECOMFL-SS01 |
| High Speed Serial plug-in | Create pre-distorted waveforms to test a device's conformance to standards | HSSNL-SS01 HSSFL-SS01 HSSPACKNL-SS01 HSSPACKFL-SS01 |
| RF Generic plug-in | Create digitally modulated signals with multiple carrier groups | RFGENNL-SS01 RFGENFL-SS01 |
| Optical plug-in | Create waveforms with complex modulation schemes for optical testing | OPTICALNL-SS01 OPTICALFL-SS01 |
| OFDM plug-in | Create Single or Multiple OFDM based Frames with one or more bursts | OFDMNL-SS01 OFDMFL-SS01 |
| RADAR plug-in | Create RADAR pulsed waveforms with various modulations and impairments | RADARNL-SS01 RADARFL-SS01 |
| Environment | Create real world scenarios for commercial, electronic warfare, and simulations for monitoring and receiver testing | ENVNL-SS01 ENVFL-SS01 |
| Spread Spectrum Clocking plug-in | Adds SSC capability to the High Speed Serial and Optical plug-ins | SSCFNL-SS01 SSCFFL-SS01 |
| S-Parameters plug-in | Adds S-Parameter capability to the RF Generic, High Speed Serial, Optical, OFDM, and RADAR plug-ins | SPARNL-SS01 SPARAFNL-SS01 |


NEW TSO820

8 Series Sampling Oscilloscope

400G / 100G Ethernet, an ideal test solution for R&D and manufacturing applications

- Simultaneous capture at a high sample acquisition rate (8 times higher)
- Lowest optical noise / Highest Sensitivity
- Optical clock recovery for various NRZ / PAM4

Increased Throughput by Disaggregation

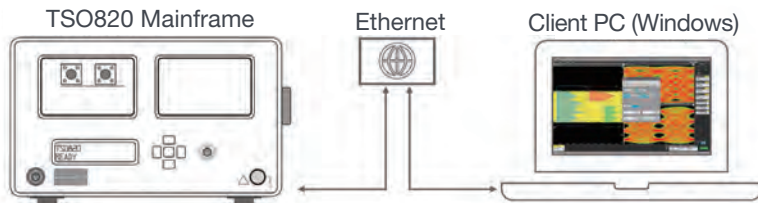


The 8 Series enables inexpensive, adaptable, and scalable solutions by leveraging the separation of acquisition hardware from analysis software. Stream waveform data from the instrument through high-speed Ethernet to the analysis platform, limiting oscilloscope downtime and maximizing investment.

| Basic Specifications | TSO820 |
|--|---|
| Rise time / bandwidth | Determined by the sampling modules used |
| Vertical resolution (nominal) | 15.6 bits over the sampling modules' dynamic range |
| Main time base / horizontal scale | 1ps/div-1ms/div |
| Record length | >80 M samples (PRBS23/PRBS23Q x 10 samples) |
| Number of sampling modules accommodated | 2 Modules |
| Number of simultaneously acquired inputs | 4 inputs |
| Maximum acquisition rate | 300kS/s |
| Dimension and weight | 132 (Height) x 217 (Width) x 590 (Depth) mm, 5.4kg (Weight) |

| 8 Series Optical Module | TSO8C17 | TSO8C18 |
|---------------------------------------|---|--------------------|
| Optical channel count | 1 optical channel | 2 optical channels |
| Wavelength range | 750-1,650nm | |
| Calibrated wavelength (± 20 nm) | 850 nm, 1310 nm, and 1550 nm | |
| Unfiltered optical bandwidth | Multi-mode: 30 GHz, Single mode: >30 GHz | |
| Fiber Diameter | 50 μ m FC/PC | |
| Supported Optical Reference Receivers | PAM2 NRZ: 25.78125GBd (TDEC-MM), 25.78125GBd, 27.95 GBd, 28.05 GBd | |
| | PAM4: IEEE 802.3™ - 26.5625 GBd SM/MM (BWel 13.28125 GHz, etc), IEEE 802.3™ - 53.125 GBd SM (BWel 26.5625 GHz, etc) | |

Analysis with TSOVu®

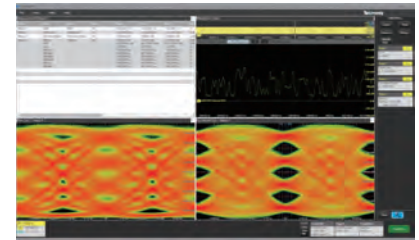

26/53GBd compatible with PAM4 analysis and TDECQ Measurement

Save time, space, and money with modular design



3U High, half-rack wide user-swappable modules with up to 4 optical channels per system

NEW TCR801

Optical Clock Recovery

Dual band clock recovery instrument centered around 26 and 53 GBd

- Designed to lock in two ranges:
 - 25.6 to 29 GBd (PAM2 / NRZ / PAM4)
 - 51.2 to 58 GBd (PAM2 / NRZ / PAM4)
- 1250 nm to 1650 nm wavelength
- Adjustable PLL bandwidths to configure the “Golden PLL” response
- Various locking modes: intelligent auto relock, quick relock, and lock initiation from the front panel of the instrument
- Two separate RF clock outputs





From 5½-digit resolution to 8½-digit resolution DMMs, choose the best Tektronix and Keithley Digital Multimeter (DMM) to meet any measurement requirement for your application

DMM6500

6½-Digit Graphical Digital Multimeter


Better Accuracy, Higher Speed, and Superior Usability

- Large 5-inch (12.7 cm) multi-touch capacitive touchscreen with graphical display
- Get instant measurement insight
- Stream and log data to secure cloud-based data visualizations
- User cursors and computer statistics to characterize waveforms
- Pinch and zoom features allow studying transients and signal waveshapes.
- Rear inputs including 10A current input
- Configured for SCPI emulation for the Keithley 2000 or the Keysight 34401A




DMM6500 (Replacement model for Keithley 2000)

1 MS/sec Digitizer; Up to 7M in Memory

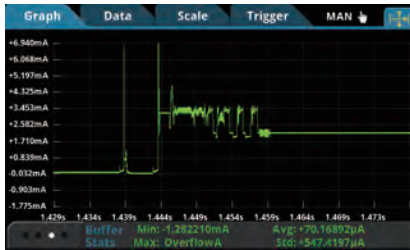

Customizable Display with options for Special Functions

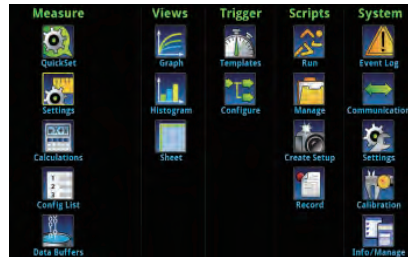

15 built-in Measurements with min. Resolution of 100nV / 1µΩ / 10pA



Digital Multimeters

Accessories: Standard Test Lead Kit, USB Cable, Calibration Certificate, User documentation: Quick Start Guide, User Manual, Reference Manual (available on the Web)
Recommended Accessories: KTTI-GPIB: GPIB interface with 6 digital I/O ports; KTTI-RS232: RS-232 interface with 6 digital I/O ports; KTTI-TSP: TSP-Link® Expansion interface with 6 digital I/O ports, 2000-SCAN: 10 channel, 2-pole or 5-channel, 4-pole multiplexer; 2001-TCSCAN: 9 channel, 2-pole or 4-channel, 4-pole multiplexer with CJC sensor


Keithley Switching and Data Acquisition Systems are required for multiple channel systems testing.

DAQ6510

Data Acquisition and Logging, Multimeter System

Simplified Setup, Real-time Status and Analysis in a precision system

- Using Keithley's 6½-digit multimeter technology for greater accuracy, functionality, and speed
- Compatible with 2700/2701 mode
- Measure or control up to 80 devices-under-test (DUTs) in a multiplexing configuration
- Select from 12 optional 7700 Series Plug-in Switch Modules for a wide range of tests




DAQ6510 (Replacement model for Keithley 2700/2701)

Export Measurement Data quickly via the USB



Display up to 20 Channels Simultaneously

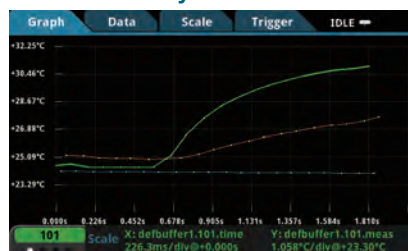

No PC required for test setup



Accessories: Standard Test Lead Kit, USB Cable, Calibration Certificate, User documentation: Quick Start Guide, User Manual, Reference Manual (available on the Web)
Recommended Accessories: KTTI-GPIB: GPIB interface with 6 digital I/O ports; KTTI-RS232: RS-232 interface with 6 digital I/O ports; KTTI-TSP: TSP-Link® Expansion interface with 6 digital I/O ports, 2000-SCAN: 10 channel, 2-pole or 5-channel, 4-pole multiplexer; 77xx Series Plug-in Cards (12 optional Plug-in Switch Modules)

DMM7510

7½-Digit Graphical Sampling Multimeter

No Compromise: High Speed and High Accuracy


- Precision multimeter with up to 7½-digit resolution
- Compact mode storage: 27.5 Million readings
- Capture Waveforms with the Built-in 1 MS/sec, 18-bit Digitizer
- Visualize and study every waveform using the graphical touchscreen display
- 100 mV, 10 Ω, and 10 μA ranges for ranges deliver the sensitivity needed to measure low signals




DMM7510

One Power Line Cycle Noise Performance

The DMM7510 provides noise performance equivalent to or better than many 8½-digit DMMs.

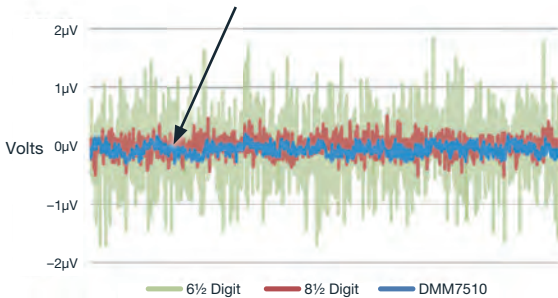

Comparison of the DMM7510's 1 VDC noise performance with that of typical 6½- and 8½-digit multimeters.

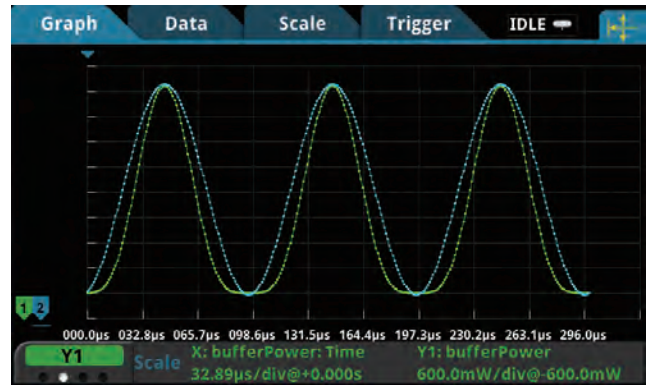


Operate the instrument and make device measurements easily with its intuitive design.

Accessories: Quick start guide, test lead, USB cable, TSP-Link cable, power cable

Keithley KickStart Software

KickStart Software for the PC enables quick test setup and data visualization when using multiple instruments.

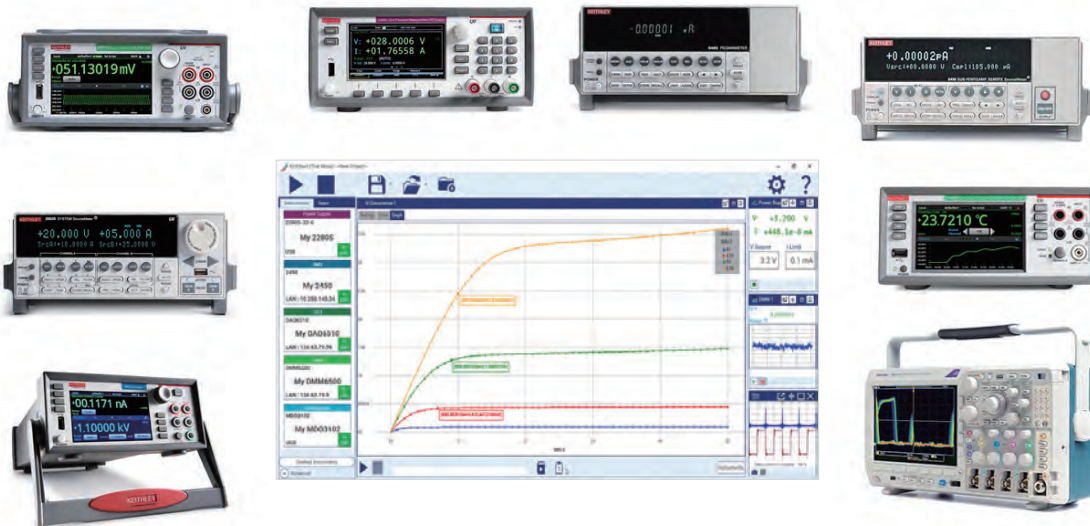

- Data Logger
- 1.946 DMM
- IV Characterizer
- Power Supply
- Scope
- High Resistivity
- Curve Tracer

- Independently control up to eight instruments: power supplies, source measure unit (SMU) instruments, DMMs, dataloggers and oscilloscopes.
- Save time by automating data collection of millions of readings and replicate tests quickly using saved test configurations
- Use built-in plotting and comparison tools to quickly discover measurement anomalies and trends.
- High Resistivity Application (optional)
- Support I-V Tracer Software (see pg 48)

Note: Please check the product page for supported instruments

| KickStart Software Suite Licenses | Description |
|-----------------------------------|--|
| KICKSTARTFL-SUITE | Perpetual Floating License |
| KICKSTARTFL-SUITE-UP | Annual Maintenance License for extending support of the Perpetual Floating License |
| KICKSTARTFL-SUITE-AN | 1 year Subscription Floating License Option |

DMM Comparison Table

| MODEL | BASIC PERFORMANCE | | | HIGH SPEED, HIGH ACCURACY | | HIGH ACCURACY | | |
|--------------------------|---------------------------|---------------------------|--|--|--|---------------------------|--|--|
| | 2110 | 2100 | DMM6500 | DMM7510 | DMM7512 | 2010 | 2001 | 2002 |
| Display | LCD 2 line | VFD 2 line | Touchscreen, 5 in. (12.7 cm) | Touchscreen, 5 in. (12.7 cm) | None | VFD | VFD | VFD |
| Digits | 5½ | 6½ | 6½ | 7½ | 7½ | 7½ | 7½ | 8½ |
| No. Measurement Channels | 1 | 1 | 10 | 1 | 2 | 10 | 10 | 10 |
| DC VOLTS | | | | | | | | |
| Measurement Range | 1 µV–1000 V | 0.1 µV–1000 V | 100 nV–1000 V | 10 nV–1010 V | 10 nV–1010 V | 10 nV–1000 V | 10 nV–1100 V | 1 nV–1100 V |
| Basic Accuracy | 0.012% | 0.0038% | 0.0025% | 0.0014% | 0.0014% | 0.0024% | 0.0024% | 0.001% |
| Ratio | | ✓ | ✓ | ✓ | ✓ | ✓ | Option | Option |
| DC Peak Spikes | | | | | | | ✓ | ✓ |
| AC VOLTS (TRMS) | | | | | | | | |
| Measurement Range | 1 µV–750 V | 0.1 µV–750 V | 100 nV–750 V | 100 nV–707 V | | 100 nV–750 V | 100 nV–775 V | 100 nV–775 V |
| Basic Accuracy | 0.12% | 0.08% | 0.05% | 0.06% | | 0.05% | 0.03% | 0.02% |
| Bandwidth | 10 Hz–300 kHz | 3 Hz–300 kHz | 3 Hz–300 kHz | 3 Hz to 300 kHz | | 3 Hz–300 kHz | 1 Hz–2 MHz | 1 Hz–2 MHz |
| dB, dBm | | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ |
| Frequency, Period | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ |
| OHMS (2/4 WIRE) | | | | | | | | |
| Measurement Range | 1 mΩ–100 MΩ | 100 µΩ–100 MΩ | 1 µΩ–120 MΩ | 0.1 µΩ–1.2 GΩ | 0.1 µΩ–1.2 GΩ | 1 µΩ–120 MΩ | 1 µΩ–1 GΩ | 100 nΩ–1 GΩ |
| Basic Accuracy | 0.02% | 0.015% | 0.0075% | 0.0024% | 0.0024% | 0.0032% | 0.0032% | 0.0007% |
| Continuity Test | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | |
| Diode Test | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | |
| Offset Compensation | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Dry Circuit | | | | ✓ | ✓ | ✓ | | |
| DC AMPS | | | | | | | | |
| Measurement Range | 0.1 µA–10 A | 10 nA–3 A | 10 pA–10 A | 1pA–10.1 A | 1 pA–3 A | 1 nA–3 A | 10 pA–2 A | 10 pA–2 A |
| Basic Accuracy | 0.15% | 0.055% | 0.02% | 0.006% | 0.006% | 0.03% | 0.03% | 0.027% |
| In Circuit Current | | | | | | | ✓ | ✓ |
| AC AMPS (TRMS) | | | | | | | | |
| Measurement Range | 10 µA–10 A | 1 µA–3 A | 100 pA–10 A | 1 nA–10.1 A | | 1 µA–3 A | 100 pA–2 A | 100 pA–2 A |
| Basic Accuracy | 0.3% | 0.15% | 0.1% | 0.08% | | 0.1% | 0.1% | 0.1% |
| Bandwidth | 10 Hz–5 kHz | 3 Hz–5 kHz | 3 Hz–10 kHz | 3 Hz to 10 kHz | | 3 Hz–5 kHz | 20 Hz–100 kHz | 20 Hz–100 kHz |
| Capacitance | | | | | | | | |
| Measurement Range | | | 0.1 pF–100 µF | 0.1 pF–100 µF | | | | |
| Temperature Measurement | TC, RTD, Thermistor | RTD | TC, RTD, Thermistor | TC, RTD, Thermistor | TC, RTD, Thermistor | TC, RTD | TC, RTD | TC, RTD |
| GENERAL FEATURES | | | | | | | | |
| Interface | USB, GPIB (opt.) | USB | LAN/LXI, USB, GPIB (opt.), RS-232 (opt.) | GPIB, USB, LAN/LXI | USB, LAN/LXI | GPIB, RS-232 | GPIB | GPIB |
| Reading Hold | ✓ | ✓ | | | | ✓ | | |
| Digital I/O | Trigger In Meter Complete | Trigger In Meter Complete | Trigger In Meter Complete | Trigger In Meter Complete 6 General I/O | Trigger In Meter Complete 6 General I/O | Trigger In Meter Complete | Trigger In Meter Complete 1 In, 4 Out | Trigger In Meter Complete 1 In, 4 Out |
| Reading Memory | 2000 rdg. | 2000 rdg. | 7 M rdg. | 27.5 M rdg. | 27.5 M rdg./channel | 1024 rdg. | Opt to 30,000 | Opt to 30,000 |
| Maximum Speed | 50K rdg/s | 2000 rdg/s | 1 M rdg/s (16-bit digitizing) | 1 M rdg/s (18-bit digitizing) | 1 M rdg/s (18-bit digitizing) | 2000 rdg/s | 2000 rdg/s | 2000 rdg/s |

To learn more about our basic performance, high speed, and high accuracy digital multimeters, visit www.tek.com/digital-multimeter

To learn more about our multi-channel measurement digital multimeters, visit www.tek.com/keithley-switching-and-data-acquisition-systems

DMM Comparison Table

| MODEL | MULTI-CHANNEL MEASUREMENT | | |
|--------------------------|--|---------------------------|---|
| | DAQ6510 | 2750 | 3706A |
| Display | Touchscreen, 5 in. (12.7 cm) | VFD | VFD 2 line |
| Digits | 6½ | 6½ | 7½ |
| No. Measurement Channels | 80 | 200 | 576 |
| DC VOLTS | | | |
| Measurement Range | 100 nV–1000 V | 100 nV–1000 V | 10 nV–300 V |
| Basic Accuracy | 0.0025% | 0.003% | 0.0025% |
| Ratio | w/MUX card | w/MUX card | |
| DC Peak Spikes | | | |
| AC VOLTS (TRMS) | | | |
| Measurement Range | 100 nV–750 V | 100 nV–750 V | 100 nV–300 V |
| Basic Accuracy | 0.05% | 0.06% | 0.05% |
| Bandwidth | 3 Hz–300 kHz | 3 Hz–300 kHz | 3 Hz–300 kHz |
| dB, dBm | | | |
| Frequency, Period | ✓ | ✓ | ✓ |
| OHMS (2/4 WIRE) | | | |
| Measurement Range | 1 μΩ–120 MΩ | 1 μΩ–120 MΩ | 100 nΩ–100 MΩ |
| Basic Accuracy | 0.0075% | 0.008% | 0.004% |
| Continuity Test | ✓ | ✓ | ✓ |
| Diode Test | ✓ | | |
| Offset Compensation | ✓ | ✓ | ✓ |
| Dry Circuit | | ✓ | ✓ |
| DC AMPS | | | |
| Measurement Range | 10 pA–3 A | 10 nA–3 A | 1 pA–3 A |
| Basic Accuracy | 0.02% | 0.03% | 0.03% |
| In Circuit Current | | | |
| AC AMPS (TRMS) | | | |
| Measurement Range | 100 pA–3 A | 1 μA–3 A | 1 nA–3 A |
| Basic Accuracy | 0.10% | 0.15% | 0.08% |
| Bandwidth | 3 Hz–10 kHz | 3 Hz–5 kHz | 3 Hz–10 kHz |
| OTHER MEASUREMENTS | | | |
| Capacitance | 0.1 pF–100 μF | | |
| Temperature Measurement | TC, RTD, Thermistor | TC, RTD, Thermistor | TC, RTD, Thermistor |
| GENERAL FEATURES | | | |
| Interface | LAN/LXI, USB, GPIB (opt.), RS-232 | GPIB, RS-232 | GPIB, LAN/LXI, USB |
| Reading Hold | | | |
| Digital I/O | Trigger In | 2 Trigger In, 5 Limit Out | 14 General I/O |
| Reading Memory | 7 M rdg. | 110,000 rdg. | 650,000 rdg. |
| Maximum Speed | 1 M rdg/s | 2500 rdg/s | >14,000 rdg/s |
| Other | Embedded Test Script Processor and optional TSP-Link, 6 Digital I/O with Interface Options | | Embedded Test Script Processor and TSP-LINK |



For multi-channel measurement: DAQ6510 (left) and 3706A (right). TSP-Link Technology provides easy and seamless connection to 3706A and Series 2600 SMU instruments.


Plug-in Switch Modules for the DAQ6510 Data Acquisition System

| Module | 7700 | 7701 | 7702 | 7703 | 7705 | 7706 | 7707 | 7708 | 7709 | 7710 | 7711 | 7712 |
|-----------------------|---|--|---|---|-----------------------------------|--|---|--|---|---|--|-----------------------------------|
| Description | 20 Channel, Differential Multiplexer Module | 32 Ch. Differential Multiplexer Module | 40 Ch. Differential Multiplexer Module | 32 Ch. High Speed, Differential Multiplexer Module. | 40 Ch. Single-pole Control Module | 40 Ch. Single-pole Control Module | 332 Ch. Digital I/O Module | 40 Ch. Differential Multiplexer Module | 6x8 Matrix Module. | 20 Ch. Solid-state Differential Multiplexer Module | 2 GHz 50 Ω RF Module | 3.5 GHz 50 Ω RF Module |
| # Analog Inputs | 20 | 32 | 40 | 32 | 40 | 20 | 10 | 40 | 48 | 20 | 8 | 8 |
| Configuration | Multiplexer w/CJC | Multiplexer | Multiplexer | Multiplexer | Independent SPST N/A | Multiplexer w/CJC | Digital I/O/ Multiplexer | Multiplexer w/CJC | Matrix | Multiplexer w/CJC | Multiplexer | Multiplexer |
| | 1x20 or two 1x10 | 1x32 or two 1x16 | 1x40 or two 1x20 | 1x32 or two 1x16 | N/A | 1x20 or two 1x10 | 1x10 or two 1x5 | 1x40 or two 1x20 | 6x8 | 1x20 or two 1x10 | Dual 1x4 | Dual 1x4 |
| Type of Connector | Screw terminals | D-sub | Screw terminals | D-sub | D-sub | Screw terminals | D-sub | Screw terminals | D-sub | Removable Screw terminals | SMA | SMA |
| Max. Voltage | 300 V | 150 V | 300 V | 300 V | 300 V | 300 V | 300 V | 300 V | 300 V | 60 V | 60 V | 42 V |
| Max. Switched Current | 1 | 1 A | 1 A | 500 mA | 2 A | 1 A | 1 A | 1 A | 1 A | 0.1 A | 0.5 A | 0.5 A |
| Bandwidth | 50 MHz | 2 MHz | 2 MHz | 2 MHz | 10 MHz | 2 MHz | 2 MHz | 2 MHz | 2 MHz | 2 MHz | 2 GHz | 3.5 GHz |
| Contact Life*1 | 10 ⁸ | 10 ⁸ | 10 ⁸ | 10 ⁸ | 10 ⁸ | 10 ⁸ | 10 ⁸ | 10 ⁸ | 10 ⁸ | 10 ¹⁰ | 10 ⁸ | 10 ⁸ |
| Switch Speed | 3 ms | 3 ms | 3 ms | 1 ms | 3 ms | 3 ms | 3 ms | 3 ms | 3 ms | 0.5 ms | 10 ms | 10 ms |
| Other | Maximum power = 125 VA. 2 current measure channels. | Maximum power = 125 VA. | Maximum power = 125 VA. 2 current measure channels. | Reed relays | Maximum power = 125 VA. | 2 analog outputs. 16 digital outputs. Maximum power = 125 VA. Event Counter/ Totalizer | 32 digital I/O. Maximum power = 125 VA. | Maximum power = 125 VA. | Connects to internal DMM. Daisy chain multiple cards for up to a 6x40 matrix. Maximum power = 125 VA. | Solid state relays, 60 V max. 500 channels/ second scan rate. | Insertion loss <1.0 dB @ 1 GHz. VSWR <1.2 @ 1 GHz. | Insertion loss <1.1 dB @ 2.4 GHz. |

*1 No load contact life. See card data sheet for additional specifications.

Plug-in Switch Modules for the 3706A System Switch / Multimeter

| | 3720 | 3721 | 3722 | 3723 | 3724 | 3730 | 3731 | 3732 | 3740 | 3750 |
|-----------------------|--|--|---------------------------------|---|--|---|--|--|--|---|
| No. of Channels | 60 (Dual 1x30) | 40 (dual 1x20) | 96 (dual 1x48) | 60 (dual 1x30) or 120 single pole (dual 1x60) | 60 (dual 1x30) | 6x16 | 6x16 | 448 crosspoints (Quad 4x28) | 32 | 40 digital I/O, 4 counter/totalizers, and 2 isolated analog outputs |
| Card Configuration | Multiplexer | Multiplexer | Multiplexer | Multiplexer | Multiplexer | Matrix | Matrix | Matrix | Independent | Independent |
| Type of Relay | Latching electro-mechanical | Latching electro-mechanical | Latching electro-mechanical | Dry reed | FET solid-state | Latching electro-mechanical | Dry reed | Dry reed | Latching electro-mechanical | N/A |
| Contact Configuration | 2 Form A | 2 Form A | 2 Form A | 1 Form A | 2 Form A | 2 Form A | 2 Form A | 1 Form A | 28 Form C, 4 Form A | N/A |
| Max. Voltage | 300 V | 300 V (ch 1-40), 60 V (ch 41-42) | 300 V | 200 V | 200 V | 300 V | 200 V | 200 V | 300 VDC /250 VAC (Form A) | N/A |
| Max. Switched Current | 1 A | 2 A (ch 1-40), 3 A (ch 41-42) | 1 A | 1 A | 0.1 A | 1 A | 1 A | 0.75 A | 2 A (Form C), 7 A (Form A) | N/A |
| Comments | 2 independent 1x30 multiplexers. Automatic temperature reference when used with screw terminal accessory (3720-ST) | 2 independent 1x20 multiplexers. Automatic temperature reference when used with screw terminal accessory (3721-ST) | 2 independent 1x48 multiplexers | 2 independent 1x30 multiplexers | 2 independent 1x30 multiplexers. Automatic temperature reference when used with screw terminal accessory (3724-ST) | Columns can be expanded through the backplane or isolated by relays | Relay actuation time of 0.5ms. Columns can be expanded through the backplane or isolated by relays | Banks can be connected together via bank configuration relays to create a single 4x112 or dual 4x56 matrix. Analog backplane relays also included for card to card expansion. Row expansion with 3732-ST-R accessory to create a dual 8x28 or single 16x28 matrix. | 32 general purpose independent channels. | All-in-one card design. 40 bidirectional I/O. Four 32-bit counter/totalizers. 2 programmable analog (V or I) outputs. |

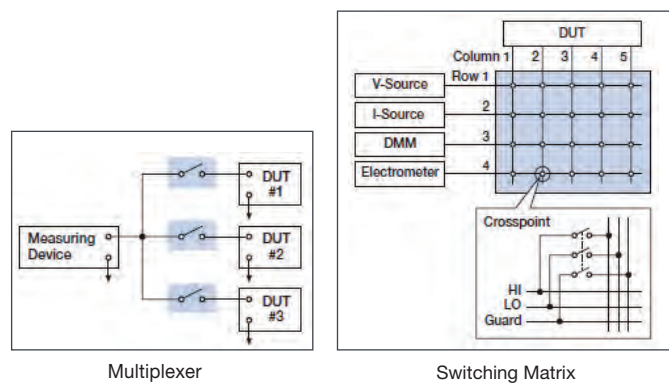

Keithley Low-Level, Sensitive and Specialty Instruments

Scientists and researchers worldwide rely on Keithley Electrometers, Picoammeters, and Nanovoltmeters for making low-level measurements beyond the capabilities of a typical digital multimeter for applications ranging from nanotechnology and superconductivity research to temperature measurement and HALT-HASS characterization. Keithley Electrometers and Picoammeters provide low current and high resistance measurements and Keithley Nanovoltmeters measure low voltages.



Keithley 2182A Ultra-low Voltage Measurements Nanovoltmeters



2182A

- 1nV sensitivity, measurement of up to 100V
- Low noise measurements, typically 15nV_{p-p} noise at (1s response time)
- 7.5 digit resolution
- Dual Channels
- Delta mode
- Analog output
- Built-in thermocouple linearization and cold junction compensation

| Nanovoltmeter | |
|-----------------|-------------|
| Model | 2182A |
| Voltage Min | 1nV |
| Voltage Max | 100V |
| Other functions | Delta mode |
| Interface | GPIB /RS232 |

2182A Accessories: 2107-4 (Low thermal input cables, 1.2m)

Keithley 6220 / 6221 Ultra-sensitive Precision DC and AC and DC Low Noise Current Sources



AC current source and current source waveform generator

- Source and sink (programmable load) 100fA to 100mA
- $10^{14}\Omega$ output impedance
- Delta mode
- 65000-point source memory
- Source AC currents, built-in standard and arbitrary waveform generators with 1mHz to 100kHz frequency range (6221 only)
- Supports pulsed I-V measurements down to 50 μ s (6221+2182A)
- Differential conductance measurements

| AC and DC Current Source | | |
|--------------------------|------------|----------------|
| Model | 6220 | 6221 |
| Min Output Current | 100fA | 100fA |
| Max Output Current | 100mA | 100mA |
| AC/DC | DC | AC/DC |
| Frequency range | - | 1mHz-100kHz |
| Interface | GPIB/RS232 | GPIB/RS232/LAN |

622x Accessories: 237-AL G-2 (2m Low noise, input cable with Triax-to-Alligator clips, CA-351 (Communication cable between 2182A and 622x), CS-1195-2 (Safety interlock connector), 174694600 (LAN Cable for 6221 only)

Keithley Picoammeters 6482 / 6485 / 6487 for Fast, Cost-effective Low Current Measurement Solutions



1fA resolution 6482 Dual-Channel Picoammeter/Voltage Source

- Current sensitivity: 1fA (6482), 10fA (6485/7)
- Resolution: 5.5 digit (6485/7), 6.5 digit (6482)
- Analog output
- Automated voltage sweeps (6482/6487)
- Built-in Model 486 and 487 emulation mode (6487)

6482 Accessories: 7078-TRX-BNC Triax-to-BNC Connector (2x)

6485 Accessories: 4801 (Low Noise BNC Input Cable, 1.2m)

6487 Accessories: CA-186-1D (Ground Connection Cable, Banana to Screw-Lug), CS-459 (Safety Interlock Plug), 7078-TRX-3 (Low Noise Triax Input Cable, 1m), 8607 and 8607-300B (High Voltage Banana Cable Set for Voltage Source Output)

Keithley 6514 / 6517B Electrometers Ultra-High Resistance / Ultra-Low Current Measurements



Built-in \pm 1kV voltage source (6517B)

- Extremely low noise: <1fA
- >200T Ω input impedance on voltage measurements
- Charge measurements of up to 20 μ C (6514)
- Resistance measurements up to 1016 Ω (6517B)
- Analog output
- Unique alternating polarity voltage sourcing and measurement method for high resistance measurements (6517B)
- Temperature and Humidity Stamping (6517B)
- 10-Channel Scanner (6517B)

6514 Accessories: 237-ALG-2 (Low Noise Triax Cable, 3-Slot Triax to Alligator Clips, 2m)

6517B Accessories: 237-ALG-2 (Low Noise Triax Cable, 3-slot Triax to Alligator Clips, 2 m), 8607 (Safety High Voltage Dual Test Leads), 6517-TP (Thermocouple Bead Probe), CS-1305 (Interlock Connector), 8607-300B (Banana Cables)

| Model | Picoammeters | | | Electrometers | |
|--------------------|--------------|------------|------------|---|---|
| | 6485 | 6487 | 6482 | 6514 | 6517B |
| Channels | 1 | 1 | 2 | 1 | 1 |
| Current | 10fA | 10fA | 1fA | 0.1fA | 0.1fA |
| Voltage source | - | 500V | 30V | - | 1000V |
| Other Measurements | - | Resistance | - | High impedance voltage / Resistance / Charge measurements | High impedance voltage / Resistance / Charge measurements |
| Interface | GPIB/RS232 | GPIB/RS232 | GPIB/RS232 | GPIB/RS232 | GPIB/RS232 |

Series 2280S Precision Measurement, Low Noise, Programmable DC Power Supplies

6.5 digit Precision Measurement DC Power Supplies



2280S-32-6



2280S-32-6 rear panel

2280S-32-6: 32V, 6A
2280S-60-3: 60V, 3.2A

- Monitor load currents from 100 nA to 6 A with high accuracy
- Measure voltage and current with 6½-digit resolution
- Capture dynamic load currents as short as 140 µs
- Output up to 192 W of low noise, linear regulated power
- Remote sensing
- Programmable rise and fall times eliminate voltage
- Built-in graphing simplifies analyzing trends or displaying voltage or current waveforms
- Sink up to 0.45 A to discharge voltage quickly
- 3-year warranty

Simple Setup and Operation



Adjust voltage, current, the current range, the measurement mode, protection levels, and other functions from the home screen.




Access the full functionality from the icon-based main menu.

Accessories

- 2280-001:** Rear Panel Mating Connector and Cover
- 174-6946-00:** LAN Crossover Cable, 3 m,
- KUSB-488B:** USB-GPIB Interface Adapter

Measure Rapidly Changing Loads

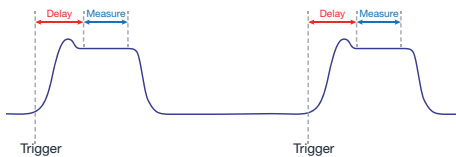

Capture dynamic load currents as short as 140 µs

DMM - Quality Low Current Measurements with High Resolution

| Range*1 | Resolution*1 |
|---------|--------------|
| 10mA | 10nA |
| 100mA | 100nA |
| 1A | 1µA |
| 10A | 10µA |

*1 Resolution is optimized with four ranges, up to 10nA

| Model | 2280S-32-6 | 2280S-60-3 |
|---|---|---|
| No of channel | 1 | 1 |
| Voltage | 32V | 60V |
| Full-scale Amps | 6.1A | 3.2A |
| Maximum Power | 192W | 192W |
| Output Ripple and Noise (20Hz - 200MHz) | <1mV _{rms} or <5mV _{pp} | <2mV _{rms} or <7mV _{pp} |
| Interface | GPIB, USB, LAN | GPIB, USB, LAN |

Series 2281S-20-6

Ideal for development and verification testing of battery powered such as IoT and mobile devices

Battery Simulator



2281S-20-6




2281S-20-6 Rear Panel

- Output range: 20V, -1A to 6A
- Create, edit, import, and export battery models
- Build a library of battery models using a Source Measure instrument as a model generator
- Display the real-time change of the SOC, Voc, and Vt for the simulated battery
- Compute battery capacity in Amp-Hour and Equivalent Series Resistance (ESR)
- 3-year warranty

| Model | 2281S-20-6 |
|---|--|
| Output rating | 0-20V, -1-6A, 120W |
| Voltage accuracy, resolution | ±(0.02%+3mV), 1mV |
| Voltage measurement accuracy, resolution | ±(0.02%+2mV), 0.1mV |
| Current measurement accuracy, resolution | ±(0.04%+10µA, 10nA (10mA range)) |
| Load regulation | ±(0.01%+2mV) |
| Line regulation | ±(0.01%+1mV) |
| Output ripple and noise | <1mV _{rms} or <6mV _{pp} (20Hz-20MHz) |
| Current limit setting, accuracy, resolution | 6.1A, ±(0.05%+5mA), 0.1mA |
| Maximum continuous average sink current | 1.02A±0.1A (typical) |
| Load Transient Recovery Time | <50µs to within 15mV of V-set |
| Battery status, internal resistance | SOC: 0 to 100%, 0 to 10Ω |
| Battery Model | 101-point or 11-point, 9 models (for user storage, editable) 9 models (for user storage, editable) |
| Communication interface | GPIB, USB, LAN |

Battery Testing

- State of charge (SOC) and voltage open circuit (Voc) can be set to any state to test a device-under-test's (DUT's) performance



Plot of Voc and ESR as a function of State of Charge (SOC).

| ID | Open Voltage | ESR(Ω) |
|----|--------------|--------|
| 0 | 19.000 | 0.015 |
| 1 | 19.000 | 0.015 |
| 2 | 16.812 | 0.016 |
| 3 | 19.003 | 0.015 |

Generate battery model table.

Generate test script to discharge batteries and create battery models with Keithley 2460 SMU



2281S-20-6
Battery Simulator



2460
Keithley 2460 SMU



USB Memory



Data Acquisition

PMU / IC Test

- Test with battery model
- Full / low battery, new / deteriorated
- Setup battery with arbitrary states (SOC, Voc, ESR)



Build up battery model, compare different battery type performance



Precision DC power supply, with DMM-quality high resolution, low current measurements capability

Available Accessories

- 2280-001:** Rear Panel Mating Connector and Cover
- 174-6946-00:** LAN Crossover Cable, 3 m
- KUSB-488B:** USB-GPIB Interface Adapter

Keithley 2220 / 2230 / 2231 Series


Multi-Channel USB and USB / GPIB Programmable DC Power Supplies

- All channels have isolated outputs
- All channels are independently controlled
- Voltage and current outputs for all channels are displayed simultaneously
- Tracking Mode can be activated on the two 30V output channels
- Two 30V channels can be combined either in series or in parallel (max voltage / current: 30V/6A)
- All channels have remote sensing
- 3-year warranty




2230G-30-1

Independent and Isolated Outputs




Power two isolated circuits with isolated output channels.

Create Bipolar Power Supplies



Use the two 30V channels to test a bipolar integrated circuit or a bipolar module over its specified voltage operating range.

Double Output Voltage or Current



Combine two channels in series to output up to 60V or combine two channels in parallel to output up to 3A. The Model 2220/2230display will show the combined value.

| | |
|--------------------------------------|-------------------------------|
| Model | 2230-30-1/2230G-30-1* |
| Number of Channels | 3 |
| Max. output voltage | Ch1: 30V, Ch2: 30V, Ch3: 6V |
| Max. output current | Ch1: 1.5A, Ch2: 1.5A, Ch3: 5A |
| Output ripple and noise | <1mV _{rms} |
| Voltage setting accuracy, resolution | 0.03% + 10mV, 1mV |
| Interface | GPIB*, USB |

*G versions has flexibility of either GPIB or USB control

Accessories

- CS-1655-15: Rear Panel Mating Connector (standard)
- 4299-7: Universal Fixed Rack Mount Kit
- KUSB-488B: USB-GPIB Interface Adapter

DC Power Supply


Series 2260B Programmable DC Power Supplies

Designed for Automated Test and Benchtop Applications


- 360W, 720W, and 1080W versions with voltages up to 800V and currents up to 108A
- Programmable internal resistance simulates battery output
- Internal test sequence mode
- 3-year warranty




Wide range of output voltages and current, combined with multiple interface choices



Programmable voltage or current rise and fall times



Burn-In Testing

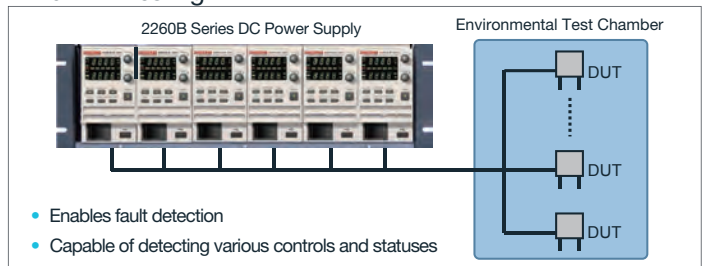

- Enables fault detection
- Capable of detecting various controls and statuses

| Model | 2260B-30-36 | 2260B-30-72 | 2260B-30-108 | 2260B-80-13 | 2260B-80-27 | 2260B-80-40 | 2260B-250-4 | 2260B-250-9 | 2260B-250-13 | 2260B-800-1 | 2260B-800-2 | 2260B-800-4 |
|--|--|-------------|--------------|-------------|-------------|-------------|-------------|-------------|--------------|-------------|-------------|-------------|
| Number of channel | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Output Voltage | 30V | 30V | 30V | 80V | 80V | 80V | 250V | 250V | 250V | 800V | 800V | 800V |
| Output Current | 36A | 72A | 108A | 13.5A | 27A | 40.5A | 4.5A | 9A | 13.5A | 1.44A | 2.88A | 4.32A |
| Power | 360W | 720W | 1080W | 360W | 720W | 1080W | 360W | 720W | 1080W | 360W | 720W | 1080W |
| Ripple and Noise (20MHz Noise bandwidth) | 7mV | 11mV | 14mV | 7mV | 11mV | 14mV | 15mV | 15mV | 15mV | 30mV | 30mV | 30mV |
| Interface | USB/LAN/GPIB Choose from analog control, USB, LAN, or optional GPIB interface for automated control) | | | | | | | | | | | |

2290-10 High Voltage DC Power Supplies

Designed for high voltage leakage current testing

10kV/1mA

- Source voltages up to 10kV
- Safety interlock controls high voltage output
- Protection module prevents damage to low voltage instrumentation
- 1-year warranty





2290-10

| | |
|-------------------|--|
| Model | 2290-10 |
| Number of channel | 1 |
| Output Voltage | 100V-10kV |
| Output Current | 1mA |
| Voltage | 1V |
| Current | 1µA |
| Protection | Arc and short circuit protected; programmable voltage and current limits and current trip. |
| Interface | GPIB, RS-232C |



Graphical Touchscreen Series SMU Overview


The Source Measure Unit (SMU) is an instrument that can precisely source voltage or current and simultaneously measure voltage and/or current. It combines the useful features of a digital multimeter (DMM), power supply, true current source, electronic load and pulse generator, all into a single, tightly synchronized instrument in a compact form factor. SMUs are considered more useful than the combination of any of the five instruments, due to the measuring instrument's versatility and high accuracy performance.

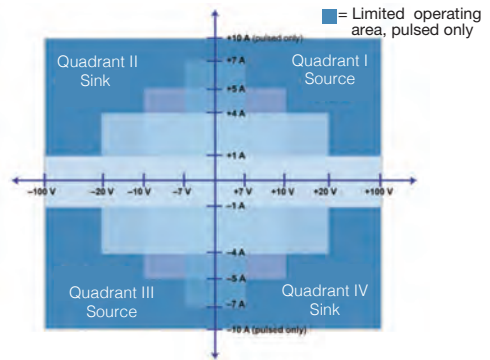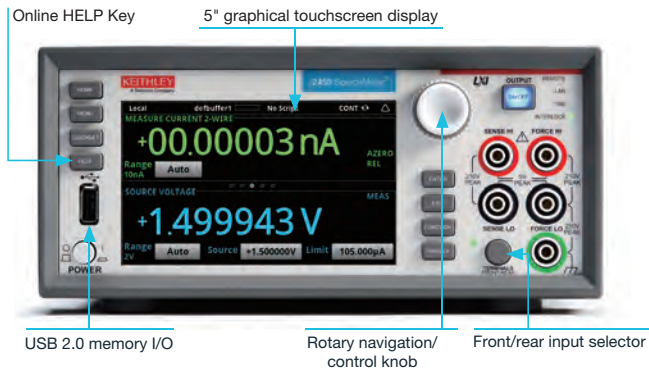

2461 gives the capabilities of a precision power supply and electronic load

All-in-One Instrument

Simultaneously source/measure voltage, current, resistance in one tightly-coupled instrument

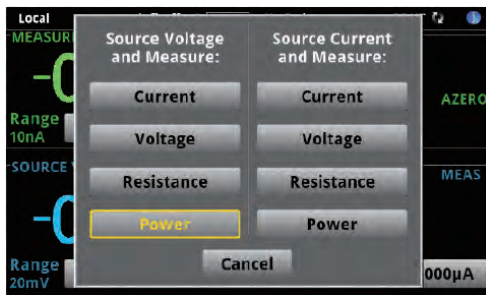


Icon-based menu

The graphical SMU's icon-based menu structure helps even novice users configure tests quickly and confidently.




Ease of Use Beyond the Touchscreen

One-touch Quickset modes speed measurement setups and minimize the time to measurements.

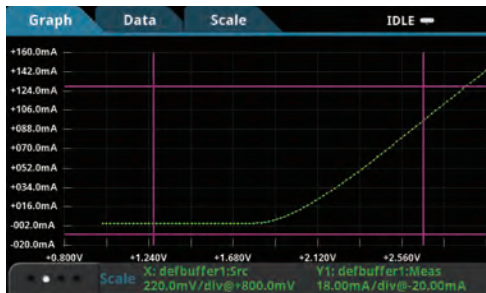

Built-in Dual 1 MS/sec Digitizers

Capturing and displaying real device operation, waveforms, and transient events

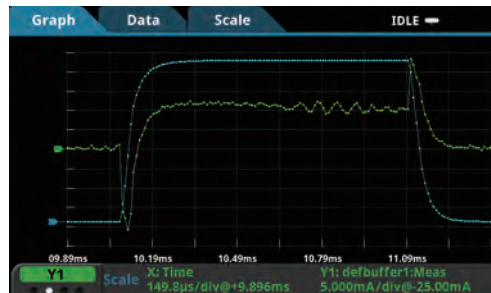


Example 1: Nanomaterials and Devices



Provides a DC Power supply and 6.5 digit ammeter in a single form factor for integrated testing. Ultra low current measurements down to 0.01pA are also possible using the Model 2450 SourceMeter

Example 2: DC-DC converter steady-state characteristics evaluation

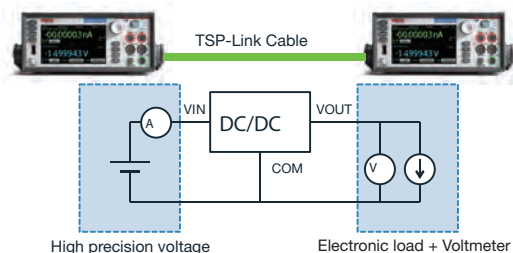

The integration of a precision DC power supply, electronic load, 6.5 digit voltage and current meter, as well as multi-channel TSP-Link capability, enables easy connections to make automated power efficiency measurements

Source Measure Units

Graphical Touchscreen Series SMU



TOUCH, TEST, INVENT

Graphical SourceMeter® SMU Instrument (SMU)

2450 / 2460 / 2461 / 2470

- Five-inch, high resolution capacitive touch screen GUI
- 0.012% basic measure accuracy with 6½-digit resolution
- Wide coverage up to 1100 V / 1 A DC 20 W max.
- Source and sink (4-quadrant) operation
- Dual 1 MS/s digitizers for fast sampling measurements (2461)
- Enhanced sensitivity with new 20mV and 10nA source/measure ranges (2450)
- Built-in, context-sensitive front panel help
- SCPI and TSP® scripting programming modes
- Front-panel USB 2.0 memory I/O port for transferring data, test scripts, and test configurations

| Model | 2450 | 2460 | 2461 | 2470 |
|--|-------------|-------------|-------------|--------------|
| Max Current Source/ Measure Range | 1A | 7A | 10A | 1A |
| Max Voltage Source/ Measure Range | 200V | 100V | 100V | 1000V |
| Measurement Resolution (Current / Voltage) | 10fA / 10nV | 1pA / 100nV | 1pA / 100nV | 10fA / 100nV |
| Max Output Power | 20W | 100W | 1000W | 20W |



Keithley I-V Tracer Software



The Keithley I-V Tracer is a software package that allows a Keithley graphical Source Measure Unit to behave similar to a traditional Tektronix curve tracer. It is appropriate for low power, two terminal devices.

- Compatible with Keithley 2450, 2460, 2461, and 2470
- Real time control on the front panel knob to see your data more clearly
- +DC, -DC, AC polarity modes (AC mode only compatible with the 2461 SMU)
- Compare mode to display a reference device next to a measured curve
- Save curve data to disk with KickStart for analysis in Excel
- Screen capture curves
- Pinch and zoom on the touchscreen to analyze data immediately
- Small form factor allows user to own a portable curve tracer

| Model | |
|------------------|---|
| KICKSTARTNL-ACT1 | Single license I-V Tracer App pack for one Source Measure Unit |
| KICKSTARTNL-ACT3 | Three license I-V Tracer App pack for three Source Measure Unit |
| KICKSTARTNL-ACT5 | Five license I-V Tracer App pack for five Source Measure Units |

Compare mode to display a reference device next to a measured curve



Compliance current can be set to limit the output power to protect the DUT's safety



Current sourcing capabilities allowing the user to sweep current across the device and plot current versus voltage



NEW 2601B-PULSE 10 μsec Pulser / SMU



Achieve high pulse fidelity without manual pulse tuning. Incorporates the functionality of a fast pulser and SMU in one instrument.

- Industry leading 10 A @ 10 V, 10 microsecond pulse output
- No tuning required; works with inductive loads up to 3 μH
- Dual 1 Megasample/second digitizers for high speed I/V pulse measurements (pulser function only)
- DC capability up to ±40 V @ ±1.0 A, 40 Watt
- TSP technology embeds complete test programs inside the instrument for best-in-class system-level throughput
- TSP-Link expansion technology for multi-channel parallel test without a mainframe
- USB 2.0, LXI Core, GPIB, RS-232, and digital I/O interfaces
- Supported in the Keithley KickStart non-programming software tool

| Model | 2601B-PULSE |
|------------------------------|-------------|
| Programming Resolution | 10μs |
| Max Current Limit | 10A |
| Max DC Current | 3A |
| Max DC voltage (using SMU) | 40V |
| Max Output Power (using SMU) | 40W |
| Min DC Current Range | 100nA |
| Manual Pulse Adjustment | NA |

SourceMeter (SMU) Series

Typical Applications

Ideal for current / voltage characterization and functional test of a wide range of today's modern electronics and devices, including: Nanomaterials and Devices, Semiconductor Structures, Organic Materials and Devices, Energy Efficiency and Lighting (LEDs / AMOLEDs, Photovoltaics / Solar cells, Batteries), Discrete and Passive Components, Material Characterization (Resistivity, Hall Effect).

Standard Performance SMUs

| Model | 2401 | 2614B | 2611/2B | 2634B | 2635/6B | 2450 | 6430 |
|------------------------------------|------------|---------------------|--------------------------|------------------------|------------------------|------------------|--------------|
| Channels | 1 | 2 | 1 / 2 | 2 | 1 / 2 | 1 | 1 |
| Max Output Power (per ch) | 20W | 30W | 30W | 30W | 30W | 20W | 2W |
| Max Output Voltage | 20V | 200V | 200V | 200V | 200V | 200V | 200V |
| Max Output DC Current | 1A | 1.5A | 1.5A | 1.5A | 1.5A | 1A | 100mA |
| Pulse | - | 10A | 10A | 10A | 10A | - | - |
| Min Voltage Measurement Resolution | 1µV | 100nV | 100nV | 100nV | 100nV | 10nV | 1µV |
| Min Current measurement | 10pA | 100fA | 100fA | 1fA | 0.1fA | 10fA | 0.01fA |
| Digits | 5.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 5.5 |
| Micro Current Measurement | - | - | - | ○ | ○ | ○ | ○ |
| TSP-Link | - | - | ○ | - | ○ | ○ | - |
| Interface | GPIO/RS232 | GPIO/RS232/ LAN/USB | GPIO / RS232 / LAN / USB | GPIO / RS232 / LAN/USB | GPIO / RS232 / LAN/USB | GPIO / LAN / USB | GPIO / RS232 |

High Voltage / High Power SMUs with Unprecedented Power, Precision, and Speed

| Model | 2470 | 2657A | 2604B | 2601/2B | 2601B-PULSE | 2606B | 2460/2461 ¹ | 2651A |
|------------------------------------|------------------|--------------------|--------------------------|--------------------------|--------------------------|-----------|------------------------|--------------------|
| Channels | 1 | 1 | 2 | 1 / 2 | 1 | 4 | 1 | 1 |
| Max Output Power (per ch) | 20W | 180W | 40W | 40W | 40W | 20W | 100W / 1000W Pulse | 200W / 2000W Pulse |
| Max Output Voltage | 1000V | 3000V | 40V | 40V | 40V | 20V | 100V | 40V |
| Max Output DC Current | 1A | 120mA | 3A | 3A | 3A | 3A | 7A | 20A |
| Pulse | - | - | 10A | 10A | 10A | 3A | -/10A | 50A |
| Min Voltage Measurement Resolution | 100 nV | 100µV | 100nV | 100nV | 100nV | 100nV | 100nV | 1µV |
| Min Current Measurement | 10 fA | 1fA | 100fA | 100fA | 100fA | 100fA | 1pA | 1pA |
| Digits | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 |
| Micro Current Measurement | ○ | ○ | - | - | - | - | - | - |
| TSP-Link | ○ | ○ | - | ○ | ○ | ○ | ○ | ○ |
| Interface | GPIO / USB / LAN | GPIO / RS232 / LAN | GPIO / RS232 / LAN / USB | GPIO / RS232 / LAN / USB | GPIO / RS232 / LAN / USB | LAN / USB | GPIO / LAN / USB | GPIO / RS232 / LAN |


¹Pulse only for 2461 (DC is the same for 2460)

TSP-Link® System Integration / TSP® Programming <Recommended Software>

Unmatched System Integration and Programming Flexibility

- The TSP-Link® expansion interface allows TSP enabled instruments to trigger and communicate with each other. TSP-Link® jacks make it simple to configure multiple instrument test solutions and eliminate the need to invest in additional adapter accessories.
- The TSP technology supports testing multiple devices in parallel and allows each instrument in the system to run its own complete test sequence, creating a fully multi-threaded test environment.

Note: Please check product page for details on compatible model for software.

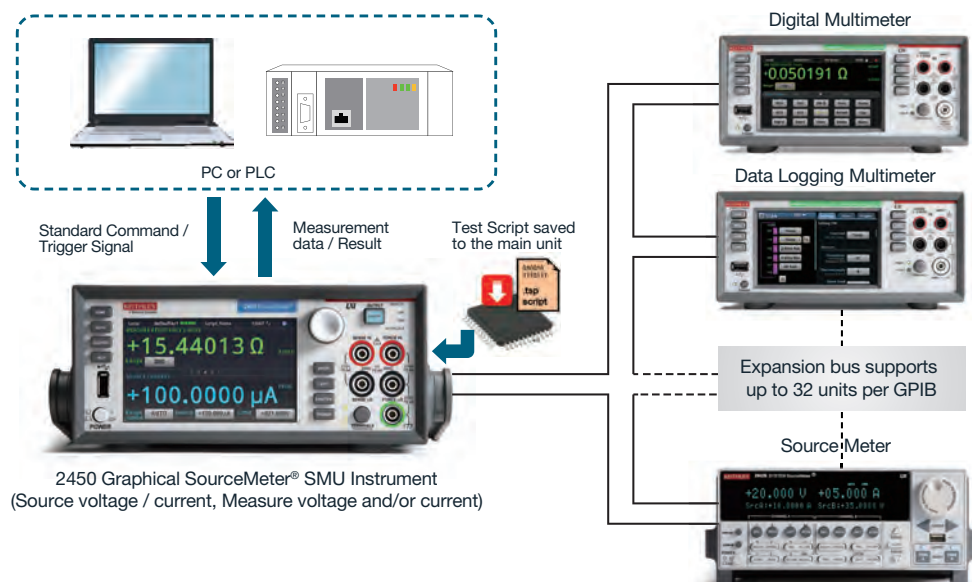

Source Measure Units


Semiconductor Test Systems

Keithley 4200A-SCS Parameter Analyzer

The Ultimate Parameter Analyzer for Materials, Semiconductor Devices and Process Development

Perform I-V, C-V and pulsed I-V characterization with speed, clarity and confidence

- Reduce Characterization Complexity
 - Easy setup and analysis in three steps with the latest Clarius user interface
 - More than 450 furnished application tests in the Clarius library
- Simple switching without Re-cabling
 - Switch automatically between I-V, C-V and Pulsed I-V measurements with the CVIC multi-switch
- Ultra-fast Pulsed I-V characterization
 - KEITHLEY established preamplifier with high current resolution of 0.01fA
 - Ultra-fast I-V and transient measurement of $\pm 40V/800mA$ that covers even the most advanced evaluation

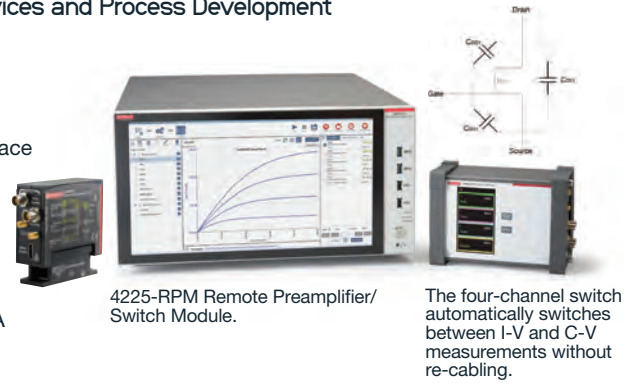

4225-RPM Remote Preamplifier/ Switch Module.

The four-channel switch automatically switches between I-V and C-V measurements without re-cabling.

| Mainframes | |
|----------------------------------|--|
| 4200A-SCS | With 15.6-inch LCD display |
| 4200A-SCS/NFP | Without 15.6-inch LCD display |
| Upgrading the Parameter Analyzer | |
| 4200A-MF-UP | Convert any 4200-SCS mainframe to the 4200A-SCS widescreen mainframe with Clarius+ software. Any instrument modules will be moved to the 4200A-SCS mainframe, with a one year warranty on the mainframe. |

| Mainframe + Configured Packages | |
|---------------------------------|--|
| 4200A-SCS-PA | High Resolution I-V Package (4200A-SCS, 4201-SMU x 2, 4200-PA, 8101-PIV test fixture) |
| 4200A-SCS-PKB | High Resolution I-V and C-V (4200A-SCS, 4201-SMU x 2, 4200-PA, 4215-CVU, 8101-PIV test fixture) |
| 4200A-SCS-PKC | High Power I-V and C-V (4200A-SCS, 4201-SMU x 2, 4211-SMU x 2, 4200-PA x 2, 4215-CVU, 8101-PIV test fixture) |

| Instruments/Modules | | | |
|---------------------|--------------------------------|---------------------|--|
| 4200-SMU | Medium Power SMU | 4225-RPM | Remote Preamplifier / Switch Module |
| 4210-SMU | High Power SMU | 4220-PGU | High Voltage Pulse Generator |
| 4200-PA | Remote Preamplifier | 4201-SMU NEW | Medium Power SMU for High-capacitance Setups |
| 4210-CV IV | C-V / I-V Multi-Switch | 4211-SMU NEW | High Power SMU for High-capacitance Setups |
| 4225-PMU | 2ch Ultra-fast Pulsed I-V Unit | 4215-CVU NEW | High Resolution Multi-frequency C-V Unit |

NEW! SMU modules for unstable low current measurement applications with large load capacitance and units for low capacitance C-V measurement are now available.

4201-SMU and 4211-SMU are capable of applying and measuring load capacitance more than 1,000 times greater than the current value.

4215-CVU has high frequency resolution and best-in-class AC drive voltage low noise and low capacitance measurements.

Ideal for applications such as Bio FETs where small changes in device capacitance need to be detected.

Parametric Curve Tracer (PCT)

Keithley's line of high power Parametric Curve Tracer configurations supports the full spectrum of device types and test parameters. Keithley's Parametric Curve Trace configurations include everything necessary for the characterization engineer to develop a complete test system quickly. Measurements up to 3kV and 100A are supported.



Configuration Selection Guide

| | Model *1 | Collector / Drain Supply *2 | | Step Generator Base / Gate Supply | Auxiliary Supply |
|-------------------------------|-------------|-----------------------------|-------------------|-----------------------------------|------------------|
| | | High Voltage Mode | High Current Mode | | |
| Low Power | 2600-PCT-1B | 200V/10A | 200V/10A | 200V/10A | - |
| High Current | 2600-PCT-2B | 200V/10A | 40V/50A | 200V/10A | 200V/10A |
| High Voltage | 2600-PCT-3B | 3kV/120mA | 200V/10A | 200V/10A | 200V/10A |
| High Current and High Voltage | 2600-PCT-4B | 3kV/120mA | 40V/50A | 200V/10A | 200V/10A |

*1 Contact your Keithley field applications engineer for custom configurations.

*2 Add a Model 2651A to increase high current mode to 50A or 100A.

Keithley Accessories

(Test Leads and Probes, Cables, Connectors, Adapters, and Tools)



KUSB-488B:
USB to GPIB Adapter



2600-BAN:
Banana Test Leads/
Adapter Cable for 2601B,
2602B, 2611B, 2612B



2600-TRIAX:
3-Lug Triax Adapter for
2601B, 2602B, 2604B,
2611B, 2612B, 2614B



5804:
General-Purpose,
4-Terminal Test Lead
Set for Series 2400,
2750, DMMs



5805:
Kelvin Probes, 0.9m
for Series 2400, 2750 and
DMMs



5806:
Kelvin Clip Lead Set 0.9m
for Series 2400, 2750 and
DMMs

- 8606 High Performance Modular Probe Kit
- 2107- x 2182A Input Cable, 2107-4 (1.2m), 2107-30 (9.1m)
- 7078-TRX- x Low noise triax cable 7078-TRX-1 (0.3m), 7078-TRX-3 (0.9m), 7078-TRX-5 (1.5m), 7078-TRX-10 (3m), 7078-TRX-12 (4m), 7078-TRX-20 (6.1m)
- 237-BAN-3A Triax to Banana Plug
- 237-TRX-BAR 3-Lug Triax Female to Female Barrel Adapter

- 237-TRX-T 3-slot Male to Dual 3-Lug Female Triax Tee Adapter
- 7078-TRX-BNC 3-slot Male Triax to BNC Adapter (Triaxial external shield is open)
- 7078-TRX-GND 3-slot Male Triax to BNC Adapter (guard removed)
- 237-BNC-TRX 3-Lug Female Triax to Male BNC (Connector with guard disconnected)

Real-Time Spectrum Analyzer


DPX® Acquisition Technology for Spectrum Analyzers Fundamentals

Tektronix's patented Digital Phosphor technology or DPX® is used in our Real-Time Spectrum Analyzers (RTSAs), to reveal signal details that are completely missed by conventional spectrum analyzers and vector signal analyzers. The full-motion DPX spectrum's Live RF display shows signals never seen before, giving users instant insight and greatly accelerating discovery and diagnosis. DPX is a standard feature in all Tektronix Real-Time Spectrum Analyzers (RTSAs).




RSA306B, RSA500A/600A Series USB Spectrum Analyzer

Discover

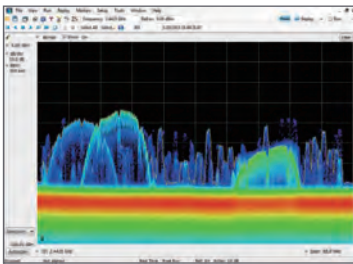


The revolutionary DPX® spectrum display offers an intuitive live color view of signal transients (minimum event duration of 0.434 μ s) changing over time in the frequency domain, giving you immediate confidence in the stability of your design, or instantly displaying a fault when it occurs.

Trigger



DPX Density™ Trigger works on the measured frequency of occurrence or density of the DPX display. You can capture low-level signals in the presence of high-level signals at the click of a button. The Frequency Mask Trigger (FMT) is easily configured to monitor all changes in frequency occupancy within the acquisition bandwidth.


Capture

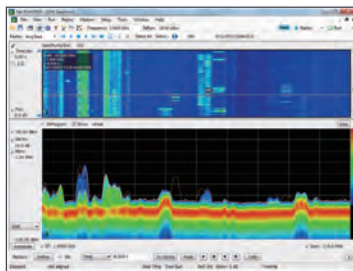

Tektronix Real Time Signal Analyzers use a wideband image-free architecture guaranteeing that signals at frequencies outside of the band to which the instrument is tuned don't create spurious or image responses.

This image-free response is achieved with a series of input filters designed such that all image responses are suppressed.

Analyze

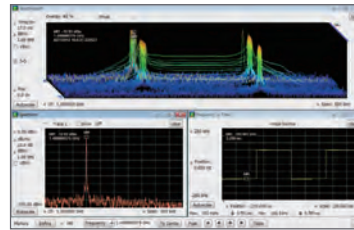


In addition to spectrum analysis, spectrograms display both frequency and amplitude changes over time.

Time-correlated measurements can be made across the frequency, phase, amplitude, and modulation domains. This is ideal for signal analysis that includes frequency hopping, pulse characteristics, modulation switching, settling time, bandwidth changes, and intermittent signals.

RSA5000B Series

Real Time Spectrum Analyzer

Measures and analyzes signals of up to 165 MHz acquisition bandwidths for WLAN analysis 802.11ac Gigabit Wi-Fi standards

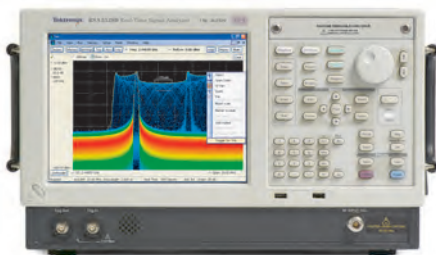

Key Features

- Innovative DPX Technology enables 100% probability of intercept for signals of 0.434 μ s¹
- Up to 3,125,000 spectrums per second¹, reliably observe intermittent phenomenon with DPX® live spectrum display
- DPX zero span with real-time amplitude, frequency, or phase
- 165 MHz real time bandwidth with 80 dBc SFDR²
- Unprecedented signal discovery over full frequency: 1 Hz - 26.5 GHz (RSA5126B)


¹Opt. 09 with 300 required ²Opt. 16XHD required

| Basic Performance | RSA5103B | RSA5106B | RSA5115B | RSA5126B |
|--------------------------------------|--|------------|-----------|-------------|
| Frequency range | 1Hz-3GHz | 1Hz-6.2GHz | 1Hz-15GHz | 1Hz-26.5GHz |
| Real-time acquisition bandwidth | 25MHz (Opt. B25), 40MHz (Opt. B40), 85MHz (Opt. B85), 125MHz (Opt. B125), 165MHz (Opt. B16x) | | | |
| Average continuous | +30 dBm (RF ATT: Auto) | | | |
| Displayed average noise level | -167dBm/Hz (>10 MHz, preamp on) | | | |
| 3rd order intermodulation distortion | -82dBc (300MHz-6.2GHz, typical), -72dBc (6.2GHz-26.5GHz, typical) | | | |
| Acquisition memory size | 1GBB (standard), 4GB (Opt. 53) | | | |

RSA306B

USB Real-Time Spectrum Analyzer

Compact and Portable Spectrum Analyzer




It's loaded with features you'd expect from spectrum analyzers twice the size.



Low-cost, packaged in a portable and rugged form factor



- Frequency range / Real-time capture bandwidth: 9kHz to 6.2GHz / 40MHz
- DPX Spectrum Display: ≤10,000 spectrums per second
- RSA306B Weight: 750g
- Full-featured Spectrum Analysis capability with included Tektronix SignalVu-PC™ software, using USB3.0

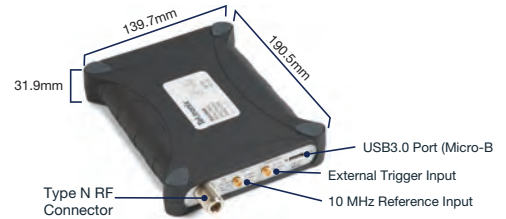

| Basic Specifications | RSA306B |
|--|---|
| RF input frequency range | 9kHz-6.2GHz |
| Measurement bandwidth | Up to 40 MHz |
| DPX Spectrum Display | DPX spectrum display, DPX spectrogram, DPX sweep |
| DPX Live Spectrum Display | Spectrum processing rate: ≤10,000 spectrums per second, 100% POI: 27μs |
| Maximum RF input level without damage | +23dBm (Reference level ≥ -10 dBm) +15dBm (Reference level < -10 dBm) |
| Maximum RF input level without damage DC voltage | ±40V |
| Amplitude accuracy (all center frequencies) | <±1.0dB (-10C- +55C) |
| Displayed Average Noise Level (DANL) | 5MHz- <1.0G: -163dBm/Hz |
| Phase noise @ 1 GHz (typical) | ≤-87dBc/Hz (10kHz) |
| SFDR | -60dBc |
| Trigger | IF power trigger |
| Max RF acquisition time | Up to 2 seconds (for streaming recording, up to SSD capacity) |
| Audio Output | AM/FM, IF Bandwidth range: 8kHz-200kHz |
| Measurement Functions | |
| Spectrum Analysis | Spectrum, DPX spectrum display, spectrogram, spurious |
| Analog Modulation Analysis | AM, FM, PM |
| Digital Modulation Analysis | Modulation formats: APSK, BPSK, C4FM, DBPSK, DPSK, FSK, GFSK, MSK, PSK, QAM, QPSK, etc (For details, refer to SVMxx-SVPC datasheet) |
| WLAN Analysis | Standards: IEEE802.11a/b/g/p (SV23xx-SVPC required option), IEEE802.11n (SV23xx-SVPC/SV24xx-SVPC required option), IEEE802.11ac (SV23xx-SVPC/SV24xx-SVPC/SV25xx-SVPC required option) |
| Others | Bluetooth measurement applications, LTE Downlink RF measurements, AM/FM/PM and direct audio measurement, APCO P25 Measurements Application, Spurious measurement (CISPR Quasi-Peak), EMC pre-compliance and troubleshooting |
| GPS Function | Get location information from GPS receiver connected to a PC |
| Mapping (MAPNL-SVPC) | Pitney Bowes MapInfo (*.mif), Bitmap (*.bmp), Open Street Maps (.osm), Map file used for the measurements: Google Earth KMZ file, Recallable results files: MapInfo-compatible MIF/MID files |
| PC | PC with USB 3.0 port is required |
| Weight | 750g |

Standard Accessories: USB 3.0 locking cable (1M), SignalVu-Pc software, documentation, USB key, Printed safety/installation manual

Recommended Accessories

- 103-0045-xx Adapter, Coaxial, 50Ω Type-N(m) to Type BNC(f)
- 013-0406-XX Adapter, Coaxial, 50Ω Type-N(m) to Type-SMA(f)
- 119-6609-xx Flexible whip antenna, BNC-Male connector
- 119-4146-xx EMCO E/H-field probes kit (100kHz~1GHz)
- RSA300CASE Soft carrying case

SignalVu-PC Analysis Option

- SVANL-SVPC AM/FM/PM/Direct Audio analysis
 - SVTNL-SVPC Settling Time (frequency and phase) measurements
 - SVMNL-SVPC General Purpose Modulation analysis
 - SVPNL-SVPC Pulse Analysis
 - SVONL-SVPC Flexible OFDM analysis
 - SV23NL-SVPC WLAN 802.11a / b / g / j / p measurement to work with analyzer
 - SV24NL-SVPC WLAN 802.11n measurement (requires SV23)
 - SV25NL-SVPC WLAN 802.11ac measurements (requires SV23 and SV24)
 - SV26NL-SVPC APCO P25 measurement
 - SV27NL-SVPC Bluetooth®/EDR/LE measurement
 - SV28NL-SVPC LTE Downlink RF measurement
 - SV54NL-SVPC Signal survey and classification
 - SV56NL-SVPC Playback of recorded files
 - MAPNL-SVPC* Mapping
 - SVQPNL-SVPC EMI CISPR detectors
 - SV31NL-SVPC Bluetooth® 5 measurements (requires SV27)
 - EMCVUNL-SVPC EMC pre-compliance and troubleshooting (includes EMI CISPR detectors)
- *GPS receiver is required.

- xxxFL-SVPC Floating license
- xxxNL-SVPC Node-locked

3-year warranty

Covering all labor and parts, excluding probes and accessories



Applications


Maintenance, Installation and Repair in Factory or Field




Interference Hunting



Value-conscious Design and Manufacturing



Academics / Education



Key specifications of the instrument controller

- OS: Windows 7/8/8.1/10 Pro 64-bit operating system
- CPU: Intel® Core i5-6300U vPro TM 2.4-3.0 GHz Processor
- Memory: 4GB or more (8GB or more is recommended)

RSA500A Series

USB Real-Time Spectrum Analyzer

Ultimate in Rugged Portability



Quickly create a spectral region of interest, enabling users to identify and sort signals efficiently.

- Frequency Range: 9kHz~3GHz/7.5GHz/13.6GHz/18GHz
- Battery operated-solution (RSA500A Series)

RSA600A Series

USB Real-Time Spectrum Analyzer

High Fidelity, Compact Size



Option SV27 supports Bluetooth Basic Rate / EDR / Low Energy Transmitter Measurements

- Tracking Generator (Optional)
- Real-time acquisition bandwidth: 40MHz (standard)

| Basic Specification | RSA503A | RSA507A | RSA513A | RSA518A | RSA603A | RSA607A |
|---------------------------------------|---|-------------|---|------------|---|-------------|
| Frequency Range | 9kHz~3.0GHz | 9kHz~7.5GHz | 9kHz~13.6GHz | 9kHz~18GHz | 9kHz~3.0GHz | 9kHz~7.5GHz |
| Max Acquisition Bandwidth (Real Time) | Up to 40MHz | | | | | |
| DPX Spectrum Display | DPX Spectrum Display, DPX spectrogram, DPX sweep | | | | | |
| DPX Live Spectrum Display | Spectrum processing rate 10,000 times/second, 100% POI: 15µs | | | | | |
| Maximum Input | +33dBm (RF input, 10 MHz to 18.0 GHz, RF Attn: ≥ 20 dB) | | | | | |
| Maximum DC voltage | +/- 40V | | | | | |
| Amplitude Accuracy | ±0.8dB (9kHz~3GHz), ±1.5dB (3GHz~7.5GHz, RSA507A), ±1.55dB (7.5GHz~13.6GHz, RSA513A/RSA518A), ±1.55dB (13.6GHz~18GHz, RSA518A) | | | | | |
| Displayed average noise level (DANL) | 25MHz~1.0GHz : -164dBm/Hz (typical) | | 25MHz~1.0GHz : -161dBm/Hz (typical) | | 25MHz~1.0GHz : -164dBm/Hz (typical) | |
| Phase noise @ 1GHz (typical) | -97dBc/Hz (10kHz) | | | | | |
| SFDR | -70dB | | | | | |
| Trigger Type | IF-level trigger, external trigger | | | | | |
| Max RF Acquisition Time | 2 seconds (up to SSD capacity for streaming recording) | | | | | |
| Audio Demodulation | AM/FM, Bandwidth: 8kHz~200kHz | | | | | |
| Tracking Generation (Opt.04)*1 | 9kHz~3GHz (Transmission) 10MHz~3GHz (Reflection) | | 9kHz~7.5GHz (Transmission) 10MHz~7.5GHz (Reflection) | | 9kHz~3GHz (Transmission) 10MHz~3GHz (Reflection) | |
| Measurement functions | Spectrum Analysis, DPX Spectrum Display, Spectrogram, Spurious | | | | | |
| Spectrum Analysis | Spectrum, DPX Spectrum Display, Spectrogram, Spurious | | | | | |
| Analog Modulation Analysis | AM, FM, PM | | | | | |
| Digital Modulation Analysis | Modulation formats : APSK, BPSK, C4FM, DBPSK, DPSK,FSK, GFSK, MSK, PSK, QAM, QPSK, etc (For details, refer to SVMxx-SVPC datasheet) | | | | | |
| WLAN Analysis | Standards : IEEE802.11a / b / g / j / p (SV23xx-SVPC required option), IEEE802.11n (SV23xx-SVPC/SV24xx-SVPC required option), IEEE802.11ac (SV23xx-SVPC/SV24xx-SVPC/SV25xx-SVPC required option) | | | | | |
| Others | Bluetooth measurement applications, LTE Downlink RF measurements, AM/FM/PM and direct audio measurement, APCO P25 Measurements Application, Spurious measurement (CISPR Quasi-Peak), EMC pre-compliance and troubleshooting | | | | | |
| GPS Format | GPS/GLONASS/BeiDou | | | | | |
| Mapping | Pitney Bowes MapInfo (*.mif), Bitmap (*.bmp), Open Street Maps (.osm), Google Earth KMZ file, MapInfo-compatible MIF/MID files | | | | | |
| Power Source | Battery (4 hours continuous) or AC100V (15W) | | | | AC100V (45W) | |
| PC | Requirement: (USB3.0 connection, Windows 7 / 8 / 8.1 / 10, 64-bit operating system) | | | | | |
| Weight | 2.99kg (with battery) | | 3.85kg (with battery) | | 2.79kg | |
| Warranty | 3 years | | | | | |

RSA500A Accessories: USB 3.0 cable (2 M), A-A connection, screw lock, shoulder strap, carrying case, quick-start manual, connector covers, WFM200BA Li-Ion rechargeable battery pack, WFM200BA Li-Ion battery pack instructions, AC power adapter, power cord, USB memory device with SignalVu-PC, API and documentation files.

RSA600A Accessories: USB 3.0 cable (2 M), A-A connection, screw lock, quick-start manual, connector covers, power cord, USB memory device with SignalVu-PC, API and documentation files.

Recommended Hardware Option

Opt. 04¹... Tracking generator (10 MHz - to maximum range of instrument or 7.5GHz)

Recommended Accessories

RSA500TRANSIT...RSA500 Series Transit Case

General purpose RF cables

012-1738-00 Cable,50 Ω, 40 inch,type-N(m) to type-N(f)

012-0482-00 Cable, 50 Ω, BNC (m) 91 cm

Adapters

103-0045-00Adapter, coaxial, 50 Ω type-N(m) to type-BNC(f)

013-0406-00 Adapter, coaxial, 50 Ω type-N(m) to type-SMA(f)

Attenuators and 50/75 Ω pads

013-0422-00 Pad, 50/75 Ω, minimum loss, type-N(m) 50 Ω to type-BNC(f) 75 Ω

011-0223-00 Attenuator, fixed, 10 dB, 2 W, DC-8 GHz, type-N(m) to type-N(f)

011-0228-00 Attenuator, fixed, 3 dB, 2 W, DC-18 GHz, type-N(m) to type-N(f)

011-0226-00 Attenuator, fixed, 40 dB, 50 W, DC-8.5 GHz, type-N(m) to type-N(f)
DC-18GHz, Type N (Ma) - Type N (Fe)

Probe

119-4146-00² EMCO E/H-field probes

SignalVu-PC Analysis Option

SVAFI-SVPC AM/FM/PM/Direct Audio Analysis

SVTFL-SVPC Settling Time (frequency and phase) measurements

SVMFL-SVPC General Purpose Modulation Analysis

SVPFLL-SVPC Pulse Analysis

SVOFL-SVPC Flexible OFDM Analysis

SV23FL-SVPC WLAN 802.11a/b/g/j/p measurement

SV24FL-SVPC WLAN 802.11n measurement (requires SV23)

SV25FL-SVPC WLAN 802.11ac measurement (requires SV23 and SV24)

SV26FL-SVPC APCO P25 measurement

SV27FL-SVPC Bluetooth 4.1/EDR/LE Measurement

SV28FL-SVPC LTE Downlink RF measurement

SV56FL-SVPC Playback of recorded files

SV54FL-SVPC Signal survey and classification

SV60FL-SVPC Return loss, distance to fault, VSWR, cable loss

MAPFL-SVPC Mapping

SVQPFL-SVPC EMI CISPR detectors

SV31FL-SVPC Bluetooth 5 measurements (requires SV27)

EMCVUFL-SVPC EMC pre-compliance and troubleshooting (includes EMI CISPR detectors)

xxxFL-SVPC Floating license


xxxNL-SVPC Node-locked

¹ Opt SV60 required to measure return loss, VSWR, cable loss, and distance to fault.

² BNC cable and N-BNC conversion connector (103-0045-00) are required.

SignalVu®-PC

SignalVu RF and Vector Signal Analysis Software

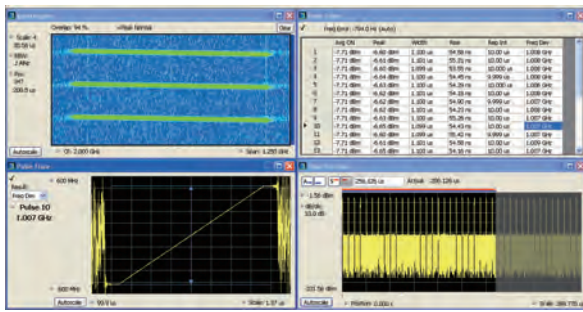

With MSO5/6B Series and MDO4000C Series

- Provides IEEE802.11ac (160MHz bandwidth) wireless LAN analysis at less than half the price of other solutions
- Operates as an ultra-wideband vector signal analyzer with analysis bandwidth of 1 GHz or more (MDO4000C) / 2 GHz (MSO5/6B)
- LiveLink option (MDO4000C) for seamless analysis on PC via USB and Ethernet connections

With RSA306B type and RSA500A/RSA600A Series

- Standard functions including DPX real-time display are included as standard
- Supports wireless LAN analysis up to 40 MHz bandwidth (optional)
- Operate as a portable vector signal analyzer (optional)

With other Tektronix oscilloscopes

- Time axis waveforms (*.wfm, *.isf format) can be saved and read in Spectrum analysis and modulation analysis
- Options available for integration into Windows-based oscilloscopes (SignalVu software)

With RSA5100B/7100B Series

- Offline analysis by loading files (*.TIQ, *.IQT format) saved in the RSA Series.
- The same user interface enables analysis in an offline environment.

Licenses for Educational Institutions

Education licenses are available for educational institutions.
Education-only version of all modules for SignalVu-PC

Features


- Supports WLAN spectrum and modulation transmitter measurements based on IEEE 802.11 a/b/g/j/p/n/ac standards (optional)
- Supports Bluetooth 5/4.1/4.1/EDR/LE (Low Energy) analysis (optional)
- General Purpose Digital Modulation Analysis provides vector signal analyzer functionality (optional)
- Automatic mapping of measurement results and labels (optional)
- Get the functionality of a vector signal analyzer, a spectrum analyzer, and the powerful trigger capabilities of a digital oscilloscope - all in a single package
- CISPR QP (quasi-peak) detection and CISPR Average detection (optional)
- EMI/EMC pre-compliance troubleshooting (optional)

| Option | Description |
|--------------|---|
| SVAFLL-SVPC | AM/FM/PM/Direct Audio Analysis |
| SVTFL-SVPC | Settling Time (frequency and phase) measurements |
| SVMFL-SVPC | General Purpose Modulation Analysis |
| SVPFLL-SVPC | Pulse Analysis |
| SVOFL-SVPC | Flexible OFDM Analysis |
| SV23FL-SVPC | WLAN 802.11a/b/g/j/p measurement - |
| SV24FL-SVPC | WLAN 802.11n measurement (requires SV23) |
| SV25FL-SVPC | WLAN 802.11ac measurement (requires SV23 and SV24) |
| SV26FL-SVPC | APCO APCO P25 measurement |
| SV27FL-SVPC | Bluetooth 4.1/EDR/LE Measurement |
| SV28FL-SVPC | LTE Downlink RF measurement |
| SV30FL-SVPC | WiGig 802.11ad measurements |
| SV54FL-SVPC | Signal survey and classification |
| SV56FL-SVPC | Playback of recorded files |
| SV60FL-SVPC | Return loss, distance to fault, VSWR, cable loss |
| MAPFL-SVPC | MAPFL-SVPC Mapping |
| CONFL-SVPC | SignalVu-PC connection to the 5 or 6 Series MSO, or MDO4000B series mixed-domain oscilloscopes |
| SV2CFL-SVPC | WLAN 802.11a/b/g/j/p/n/ac and live link to 5 or 6 Series MSO, or MDO4000C (Bundle of SV23, SV24, SV25, CON) |
| SVQPFL-SVPC | EMI CISPR detectors |
| SV31FL-SVPC | Bluetooth 5 measurements (requires SV27) |
| EMCVUFL-SVPC | EMC pre-compliance and troubleshooting (includes EMI CISPR detectors) |

xxxFL-SVPC.....Floating license
xxxNL-SVPC.....Node-locked




- ### Multi-Domain Analysis
- Extensive time-correlated, multidomain displays connect events in time, frequency, phase, and amplitude for quicker understanding of cause and effect when troubleshooting

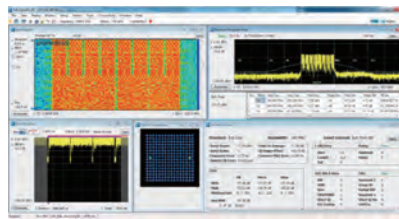

- ### Wireless LAN Analysis
- Supports IEEE801.11ac (160MHz, 256QAM)
 - Supports detailed analysis of wireless LANs such as SEM, constellation, EVM, etc.




- ### Bluetooth Analysis
- Supports analysis of Bluetooth 5 / 4.1 / 4.1 / EDR / LE
 - Pass/Fail results are provided with customizable limits



- ### Mapping
- Automatic mapping of measurement results and labels (optional)
 - Obtains location information from a GPS receiver (sold separately) connected to a PC

DataVu-PC


Record Analysis Software for Real-Time Spectrum Analyzers

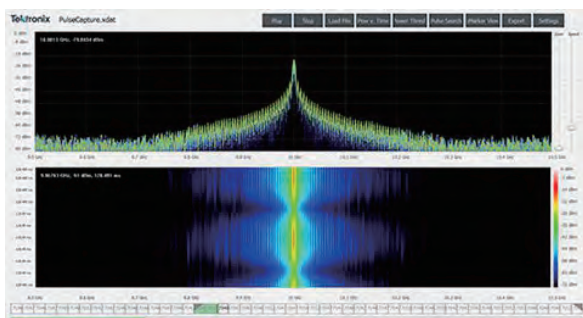

Features

- Licenses available according to the bandwidth of the captured signal.
- Color-graded Spectrogram
- FFT overlap and speed control, optimizes between highest probability of intercept vs. analysis time
- Export areas of interest to .XDAT, SIQ, and .TIQ formats
- User settable sliders for start/stop point
- File progress bar, Time Overview display, eMarkers, Pulse Analysis

EMCVu (SignalVu-PC option) EMI/EMC Pre-Compliance Testing Software

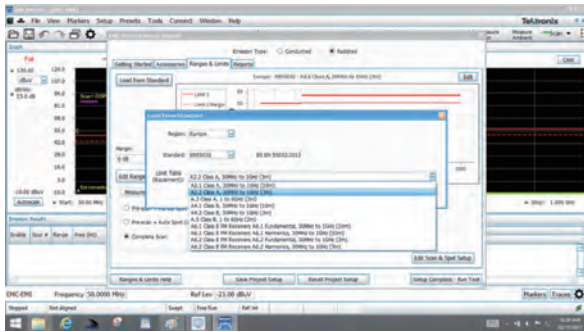


Supported Standards: CISPR11, CISPR12, CISPR13, CISPR14, CISPR15, CISPR25, CISPR32 IEC60601-1-2, VCCI, FCC Part 15, FCC Part 18, MIL-STD 461G

Features

- Built-in standards and accessory setup with push-button selection
- An easy-to-use setup wizard
- Harmonic markers and faster scans using peak detector and spot measurements with quasi-peak and average detector failures
- Automated multiple measurement/multiple format reporting
- Real-time spectrum display for efficient EMI debugging


Example of Radiated Pre-compliance Test (CISPR11)

EMI-RE-HWPARTS
(Accessories for Radiated-Pre-compliance Test)

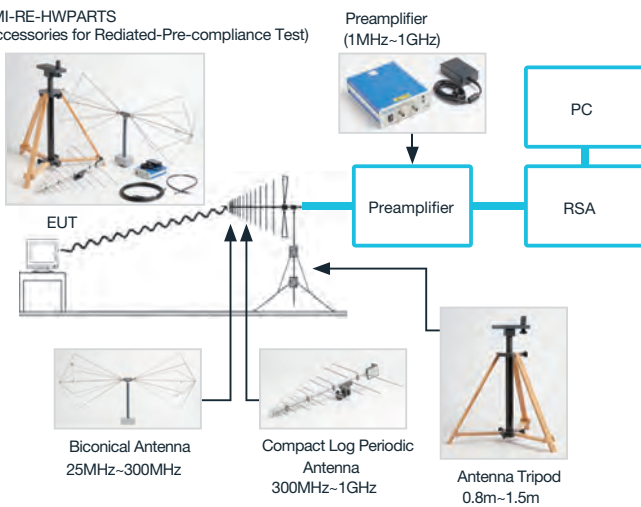

Debugging and Troubleshooting

EMI-DEBUG-HWPARTS
(EMI Accessories for Debut)

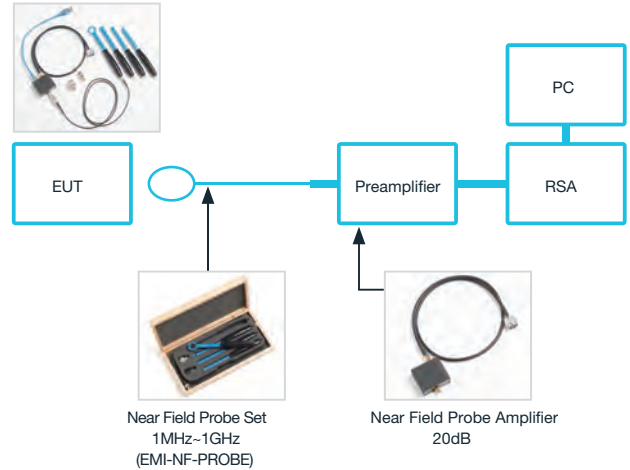

RSA7100B Series Wideband Spectrum Analyzer




Streaming capture to internal RAID of over 2 hours at full 800 MHz bandwidth

Features

- Frequency range: 16 kHz to 26.5 GHz
- Real-time acquisition bandwidth of up to 800 MHz for state-of-the-art radar and communications analysis
- Streaming capture to internal RAID of over 2 hours
- High performance spectrum analysis for advanced design verification with -134 dBc/Hz phase noise at 1 GHz, typical amplitude accuracy of +/-0.5 dB
- DataVu-PC software for analysis of recorded events of any length

| Basic Specifications | RSA7100B |
|--------------------------------------|--|
| Frequency Range | 16kHz-14GHz (Opt. 14) /26.5GHz (Opt. 26) |
| Real-time acquisition frequency band | 320MHz (standard), 800MHz (Opt. B800) |
| Phase Noise | -134 dBc/Hz at 10 kHz offset at 1GHz |
| Displayed Average Noise Level | -168 dBm/Hz (10 MHz to 100 MHz), Preamp ON, typical |
| RAID Recoding to RAID | 165 points 320MHz-800MHz, 1000MS/s, RAID Opt. C) 128 hr (<10MHz, 15.625MS/s, RAID Opt. C) |
| Max Input DC Voltage | ±40V |
| Max Input Level | +30dBm |

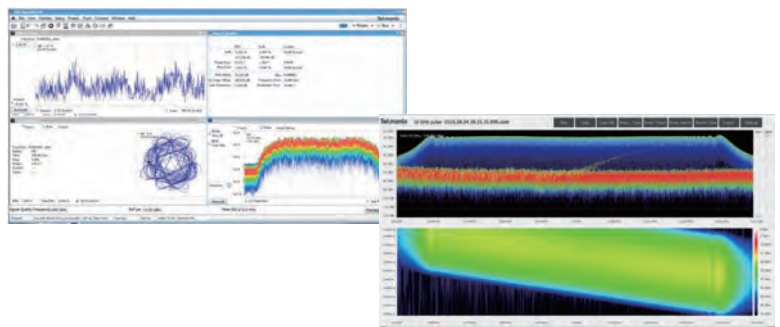

FCA/MCA3000 Series

Frequency Counter / Timer Analyzer / Microwave Analyzer

Industry-leading resolution, built-in measurement and analysis modes




Width: 210mm Height: 90mm Depth: 395mm Weight: 2.7kg

- 8 models for general purpose to high performance to microwave compatible analysis modes
- Max data transfer rate to internal memory: 250k Sample/s
- Easily connect to a PC with the USB and GPIB ports
- Multi-parameter display
- Up to 3 Input Channels
- Up to 14 types of automated measurements
- Integrated power meter (MCA Series)


| Basic Specifications | General Purpose Model | | | High Performance Model | | | Microwave Compatible Model | |
|--------------------------|--|-----------------|-------------------|------------------------|-----------------|------------------|---|-------------------|
| | FCA3000 | FCA3003 | FCA3020 | FCA3100 | FCA3103 | FCA3120 | MCA3027 | MCA3040 |
| Frequency Range | 300MHz | 300MHz to 3 GHz | 3300MHz to 20 GHz | 300MHz | 300MHz to 3 GHz | 300MHz to 20 GHz | 300 MHz to 27 GHz | 300 MHz to 40 GHz |
| Time resolution (single) | 100ps | | | 50ps | | | 100ps | |
| Vmax,Vmin Resolution | 3mV | | | 1mV | | | 3mV | |
| Requency Resolution | 12 digits per second | | | 12 digits per second | | | 12 digits per second | |
| Automated Measurements | Frequency, period, ratio, time Interval, time interval error, pulse width, rise/fall time, phase angle, duty cycle, maximum voltage, minimum voltage, peak-to-peak voltage | | | | | | | |
| Other Measurements | - | | | Totalize Measurement | | | Integrated power meter Power Range: -35 dBm to +10 dBm | |
| Analysis Function | Measurement Statistics Mode, Histogram Mode, Trend Plot Mode | | | | | | | |
| Display | Multi-parameter Display: Read critical auxiliary measurement values displayed with your main frequency, time, or phase measurement | | | | | | | |
| External Interface | GPIB/USB | | | | | | | |
| | 250kS/s | | | 250kS/s | | | 250kS/s | |
| Internal Memory Size | 750kpoints | | | 3.75Mpoints | | | 750kpoints | |
| GPIB/USB | 5kS/s (Block mode) | | | 15kS/s (Block mode) | | | 5kS/s (Block mode) | |
| Warranty | 3 years | | | | | | | |
| Software | TimeView™ Software for Modulation Domain Analysis | | | | | | | |

Accessories: Power cable, calibration certificate, quick start user manual, user manual CD-ROM, programmer's guide, technical specifications, modulation analysis TimeView software (30-day limited trial version)


Feature-rich Tools for Precision Measurements



Trend Plots



Histograms




Measurement statistics mode including Allan Deviation

TimeView™ Modulation Domain Analysis Software (TVA3000)

FCA/MCA Series transform your timer / counter into a modulation domain analyzer and see frequency changes over time to truly characterize your device's performance.

With Windows 10 support.



Recommended Accessories and Software

- HCTEK4321**.....Hard carrying case
- 174-4401-xx**.....USB host to device cable (90cm)
- 012-0991-00**.....GPIB cable (double shielded, 1m)
- 012-0482-xx**.....BNC male to BNC male, cable shielded, 90cm, 50Ω
- TVA3000**.....TimeView™ Modulation Domain Analysis Software
- RMU2U**.....Rackmount shelf kit for 2 units

Recommended Options

| | | FCA Series | MCA Series |
|-----------|-------------------------------------|----------------------------------|----------------------------------|
| MS | Medium-stability over time base | <input type="radio"/> | Standard Feature |
| HS | High-stability over time base | <input type="radio"/> | <input type="radio"/> |
| US | Ultra high-stability over time base | <input checked="" type="radio"/> | <input type="radio"/> |
| RP | Rear-panel connectors | <input type="radio"/> | <input checked="" type="radio"/> |

Opt. D1..... Calibration Data Report **Opt. R5** Repair Service 5 Years

Tektronix Service Solutions Organisation (SSO)

Solid quality and reliability based on technological capabilities

Contact Tektronix for calibration and repair of test and measurement instruments.

Tektronix, Inc. was established in 1946 by C. Howard Vullum and Melvin J. Murdock with the creation of the world's first time-base triggered oscilloscope. Headquartered in Beaverton, Oregon, delivers innovative, precise and easy-to-operate test, measurement and monitoring solutions that solve problems, unlock insights and drive discovery globally.



Tektronix has been at the forefront of the digital age for the past 75 years. Renowned globally for its contributions to major technology breakthroughs, from the invention of color television to space exploration, Tektronix is credited as one of the most influential test and measurement companies in history.

In 2010, Tektronix, Inc. merged with Fluke Calibration, Inc. and Keithley Instruments. We have been working to break down the complexities and barriers of customers having to request calibration of their various measuring instruments from different manufacturers.

Maintenance contract for repair of Tektronix instruments

We recommend that you sign a maintenance contract for peace of mind in case of failure.

Test and Measurement instruments are used in a wide range of fields, including electrical, automotive, and aviation, and are required to meet strict requirements for product development and inspection. They are required to meet stringent requirements for product development and inspection. Sophisticated components / parts are used in the manufacture of our products. When parts used in test and measurement instruments fail, the replacement and/or repair can be expensive.

To minimize the cost burden on the customer, Tektronix maintenance contract and repair services can be added at the time of product purchase. This reduce the cost and time of unexpected repairs.

| Plan | Opt | Type of Service | Description |
|---|----------|------------------------------------|--|
| Extended Repair Warranty Service Options | R3 | Options available at Point of Sale | Standard warranty extended to 3 years |
| | R5 | | Standard warranty extended to 5 years |
| Repair Contract Services | AREPAIR | Options available After Sale | Standard one-year repair contract service Lock in pricing with multi-year agreements |
| GOLD CARE | G3 | Options available at Point of Sale | 3 year Gold Care Plan Access to a loaner product during repair or advance exchange to reduce downtime |
| | G5 | | 5 year Gold Care Plan Access to a loaner product during repair or advance exchange to reduce downtime |
| | GOLDCARE | At any point in time | GOLDCARE plan available for later subscription |
| Total Protection Plan | T3 | Options available at Point of Sale | The 3 year Total Product Protection Plan |
| | T5 | | The 5 year Total Product Protection Plan |

CalWeb® | Cloud-Based Asset Management

CalWeb enables you to easily manage asset pools and calibration programs.

[CALWEB Features]

- One-Stop Solution for managing your calibration program
- 3,000 companies and about 15,000 users around the world
- More than 12 years of experience in use, mainly in North America
- Quality, price, and delivery management for calibration, repair, and maintenance
- Approval management* for calibration failures
- No application required: Web-based (IE/Chrome)
- Intuitive User Interface

(* Optional, additional charges applies)



Tektronix Calibration Services

ISO/IEC 17025 Accredited Calibration / Traceable Calibration Service

Tektronix has the world's most comprehensive network of repair and calibration services management by Tektronix Global QMS (Quality Management System) for test and measurement equipment.

All Tektronix quality systems meet or exceed the requirements of ISO/IEC 17025, and most Tektronix labs are ISO/IEC accredited.

For more information on repair and calibration services, please email: service.asean@tektronix.com.

| Plan | Opt | Period of Purchase | Description |
|---|---------|---------------------------------|---|
| 3-year standard calibration option | C3 | At the time of product purchase | 3-year standard calibration option. Includes factory calibration plus 2 standard calibrations and a calibration certificate. (1 calibration per year) |
| 5-year standard calibration option | C5 | At the time of product purchase | 5-year standard calibration option. Includes factory calibration plus 4 standard calibrations and a calibration certificate. (1 calibration per year) |
| Standard Calibration Contract | ACALVER | Options available After Sale | Purchased once or multiple times at the same time. Guarantees that the product will meet the specifications at the time of manufacture, maintaining performance and accuracy. |
| Accredited Calibration Contract | AACCDAL | Options available After Sale | Purchased once or multiple times at the same time. Guarantees that products meet IEC/ISO17025 requirements to maintain performance and accuracy. |

Tektronix Test & Measurement Learning Center


Knowledge Center with a Wealth of Technical Resources

www.tek.com/learning

The Learning Center offers a variety of popular technical resources, including solution briefs, videos, application notes, and more. Get fundamentals like:

- XYZs of Oscilloscopes Primer
- Understanding and Characterizing Timing Jitter Primer
- ABCs of Probes
- EMI Pre-Compliance Testing and Troubleshooting with Tektronix EMCVu
- 25 Common Things You Can Do with an Arbitrary Function Generators

Hope you find it useful.

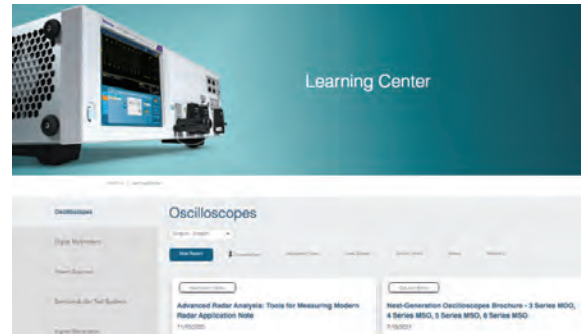

TekShare

The Power of Sharing of Minds

sg.tek.com/tekshare

Engineers are great problem solvers. However, sometimes we feel overwhelmed or even left alone at our wit's end. The Tektronix TekShare Series aims at sharing the insights, tips and tricks we had learned from working with many other engineers like you around the world, such that you can see your problems in a new perspective and approach them in a new different way, getting it solved faster and easier.

To facilitate engineering learning of latest test and measurement of various applications, we are consolidating many on-demand webinars for your self-paced learning. We will continue to add new webinar videos throughout the year.



A solution that offers great savings, plus meeting your tight deadlines.

www.tek.com/encore

Tektronix Encore

Factory Certified. Performance Ready.


Reconditioning process to make Tektronix Encore products "good as new". You never sacrifice performance when purchasing a Tektronix Encore product.



Tek Events

www.tek.com/events

Learn about Tek's upcoming events, including seminars, tradeshows, webinars and more.



Get the latest information on Tektronix

Tektronix Official Website

www.tek.com

Get the latest information on Tektronix products and services, technical contents, manuals, firmware and more. You can also request for quote and technical support! We're also available on LiveChat. Reach out to us anytime with your needs!

Tektronix YouTube 

<https://www.youtube.com/user/tektronix/videos>

Various easy-to-understand how to videos are available.

Tektronix Facebook 

<https://www.facebook.com/TekAsean/>

Tektronix Twitter 

twitter.com/tektronix

Tektronix LinkedIn 

<https://www.linkedin.com/showcase/tektronixasean>



relentlessly curious
problem solvers
people who find a way
We're for the engineer
askers of why
mentors
bench masters


We're Tektronix, and we're for the engineer.

We bring you inspiring stories from our fellow engineers who push the boundaries in science and technology to start making tomorrow better, today.

www.tek.com/stories

Do you have a story to share?

- When did you first know you wanted to be an engineer?
- Who influenced or inspired you on your journey?
- What are the hardest things you've ever done in your work as an engineer?
- What motivates you in your role today?



Share your story with us today!

We're seeking inspiring stories from across the globe.

Your story has a chance to be brought to life and featured in a form of a video, article, blog, social post, etc.

For more inspiring stories from engineers, visit sg.tek.com/stories. If you have any questions, feel free to email us at Stories@tektronix.com.

Tektronix / Keithley Instruments

For inquiries on our products and services, you can reach us at our toll-free numbers or email us at asean.mktg@tektronix.com.

Toll-Free Numbers:

Australia 1 800 709 465

Indonesia 007 803 601 5249

Malaysia 1 800 22 55835

New Zealand 0800 800 238

Philippines 1 800 1601 0077

Singapore 800 6011 473

Thailand 1 800 011 931

Vietnam 12060128

*Toll-free numbers. If not accessible, call: +65 6356 3900

** IDD charges may apply*



Contact
Information

www.tek.com

Singapore Office

Tektronix Southeast Asia Pte Ltd
1 Clementi Loop #06-02
Singapore 129808

Malaysia Office

Tektronix Instruments Malaysia Sdn Bhd
Unit1-15-12, Suntech @ Penang Cybercity
Lintang Mayang Pasir 3, 11950 Bayan Baru
Penang, Malaysia

